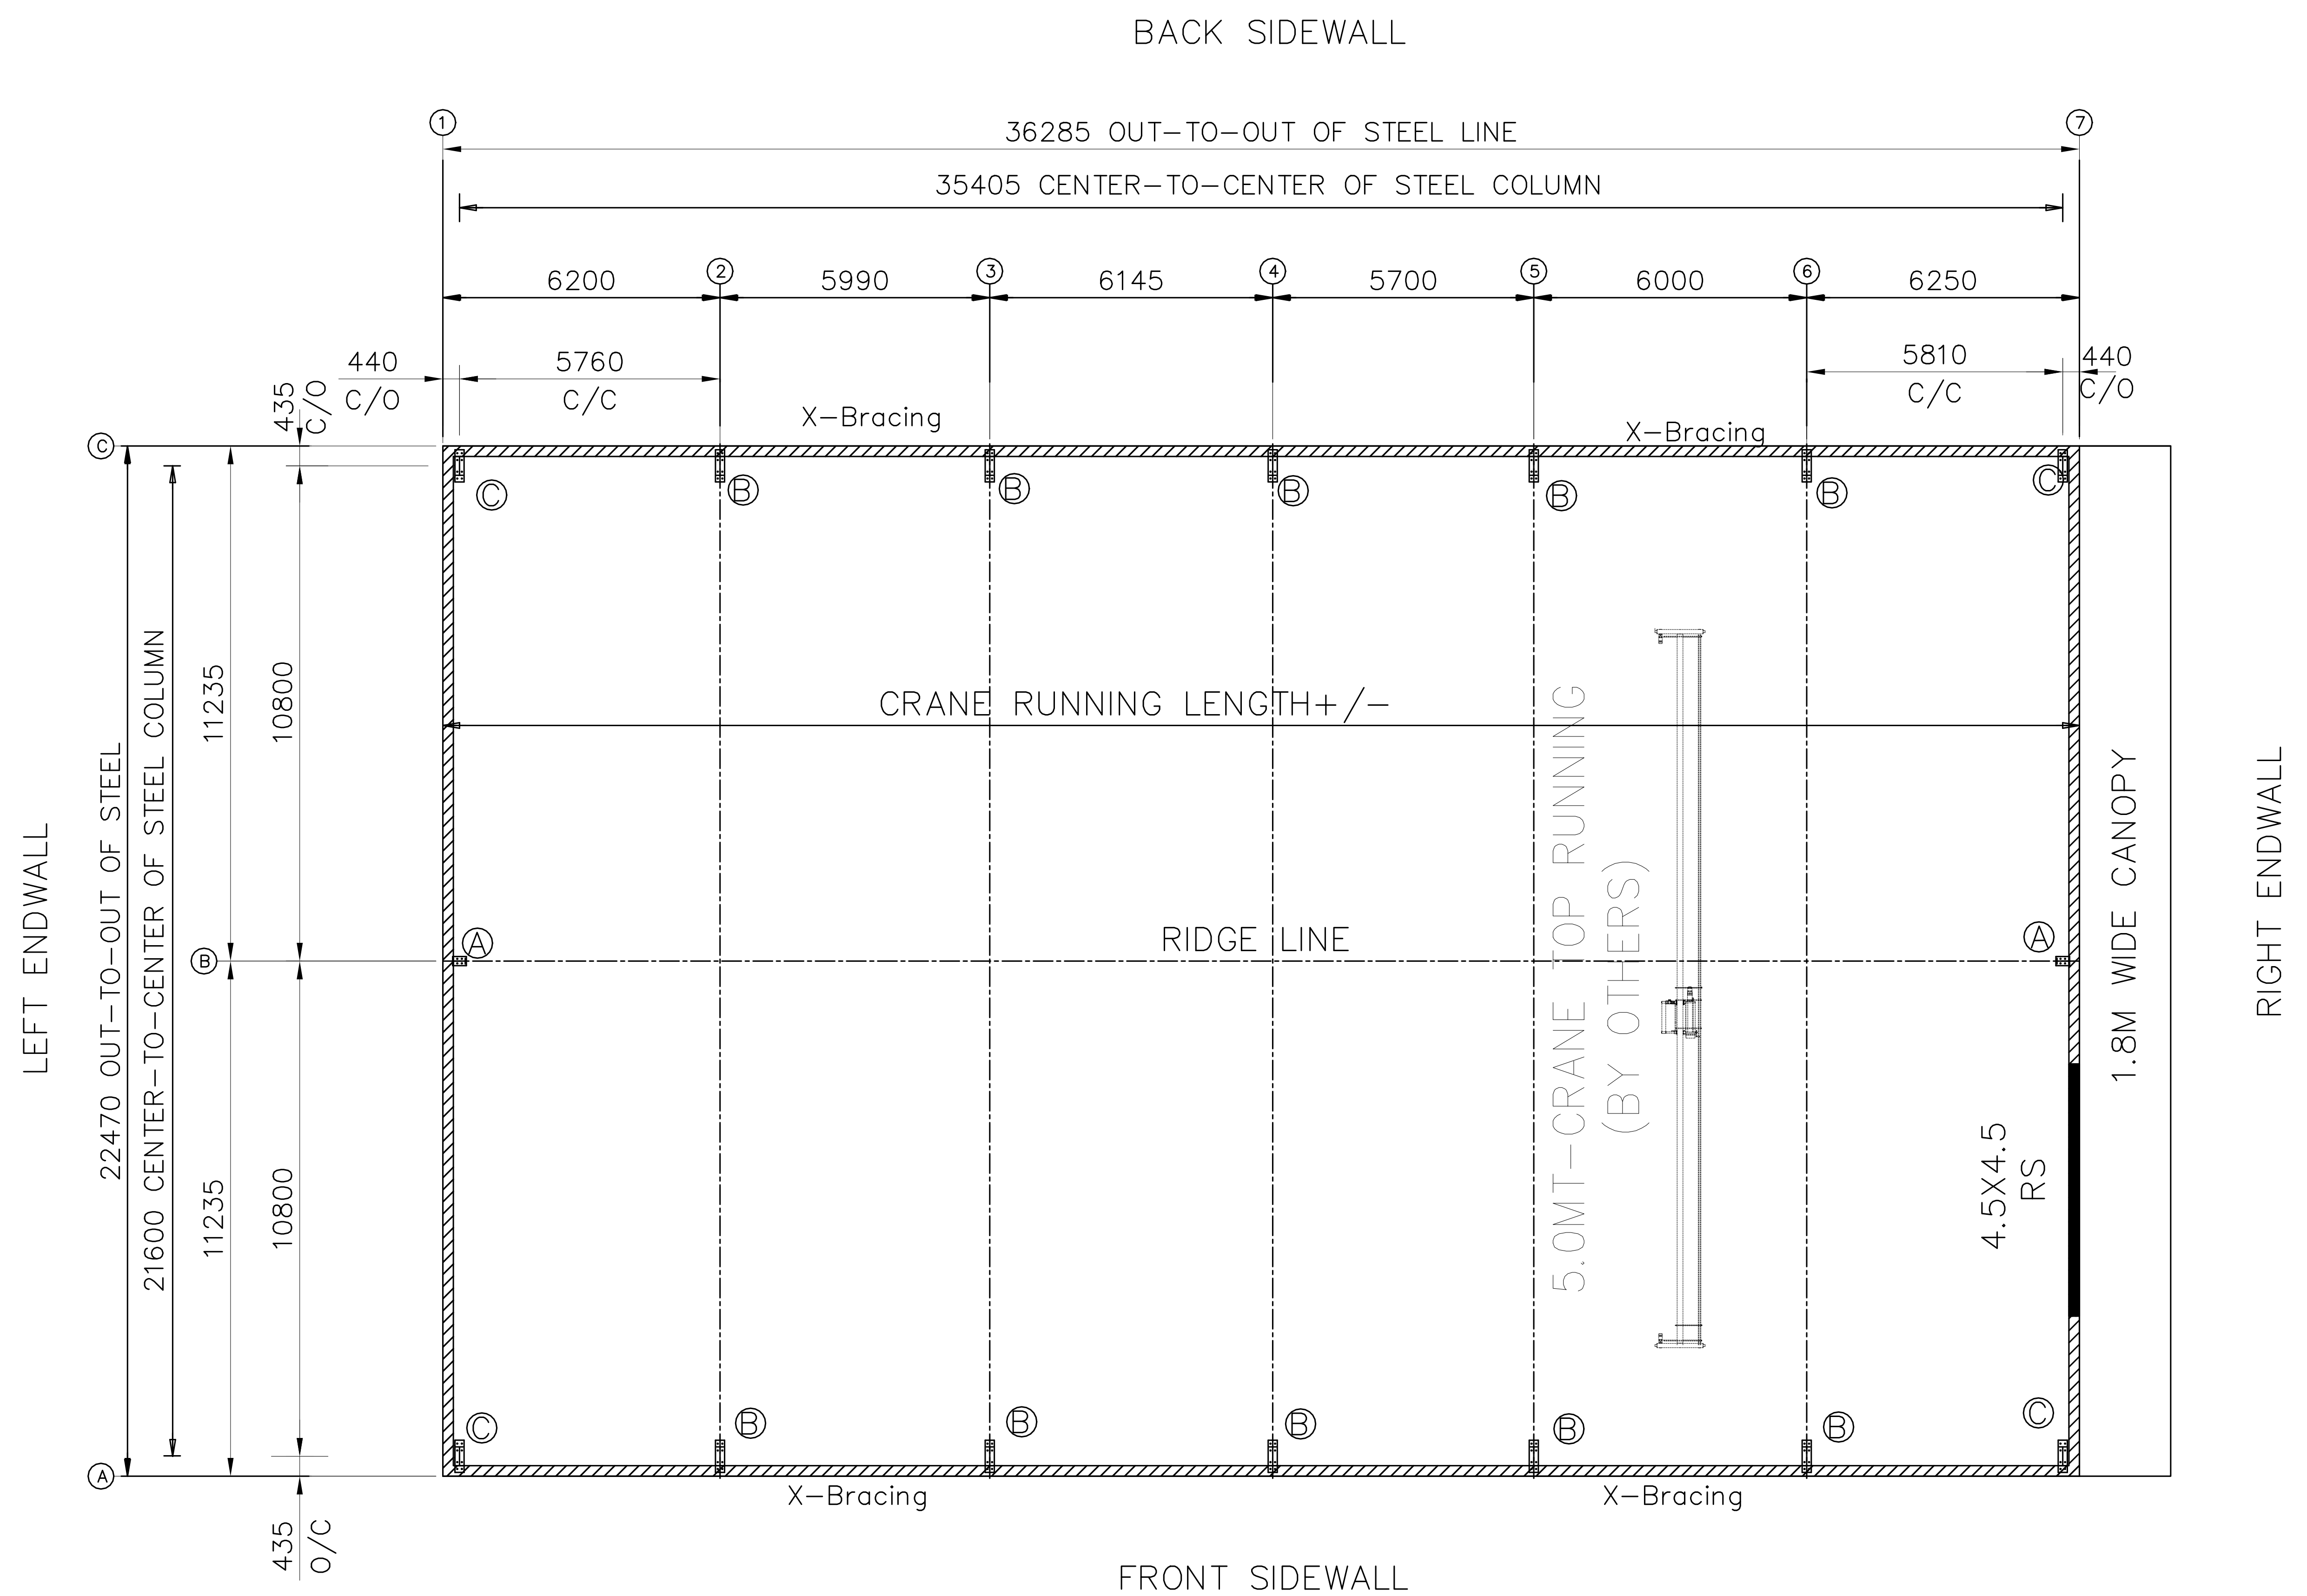

ANCHOR BOLT PLAN

NOTE: All Base Plates @ 0 (U.N.)

2.5M B/W AND ABOVE SHEETING

NOTE: CRANE IS IN FUTURE

RECLA

NOTE–THE DRAWING ARE INTENDED SOLELY FOR APPROVAL PURPOSES. CERTAIN PARTS OR DIMENSIONS MAY NOT BE TO SCALE AND THEREFORE MUST NOT BE USED FOR CONSTRUCTION OR ANY OTHER PURPOSE

RECLA INTERNATIONALS PRIVATE LIMITED

PROJECT	Proposed Warehouse	ANCHOR BOLT PLAN		
ID	C323–153	DESIGN: AAB	DRAFT: AAB	CHECK: VVJ
PROJECT ADDRESS	PUNE	DATE: 09/JUN/2025		
		C323–153_A01		

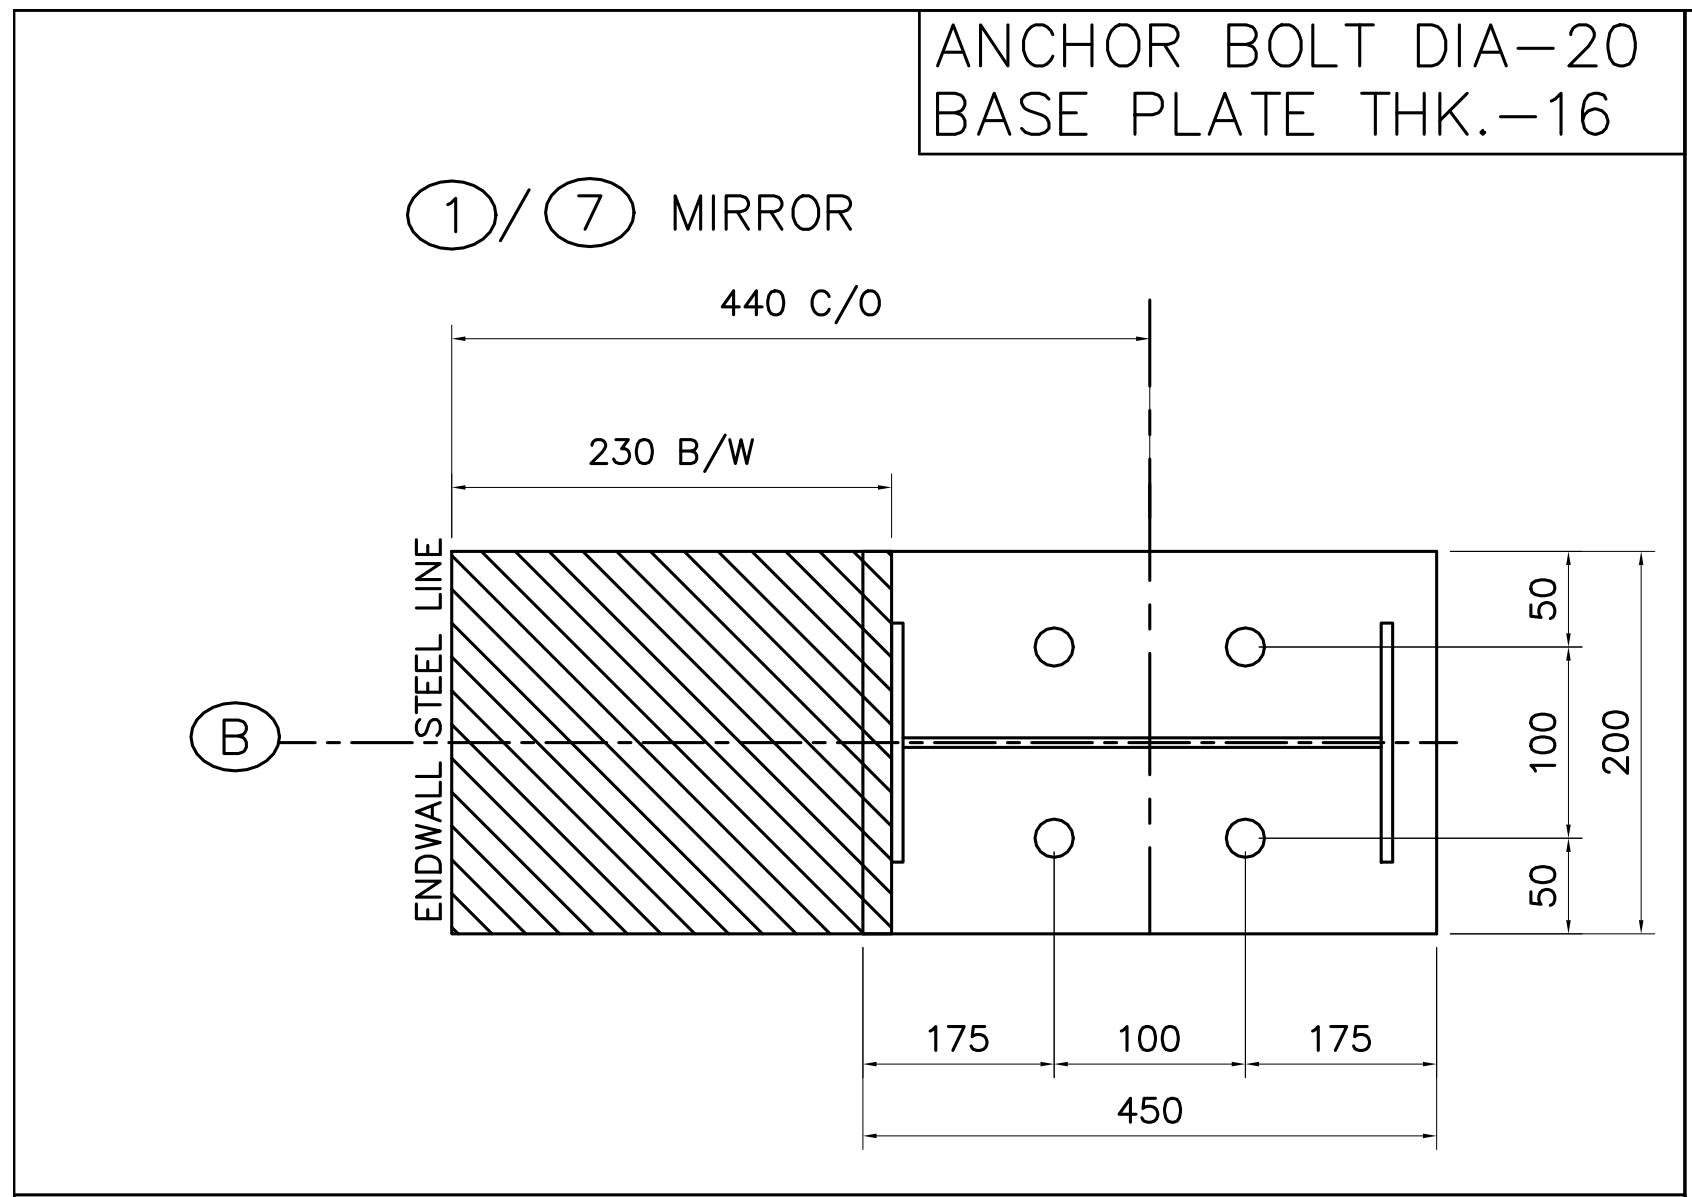

DETAIL-A

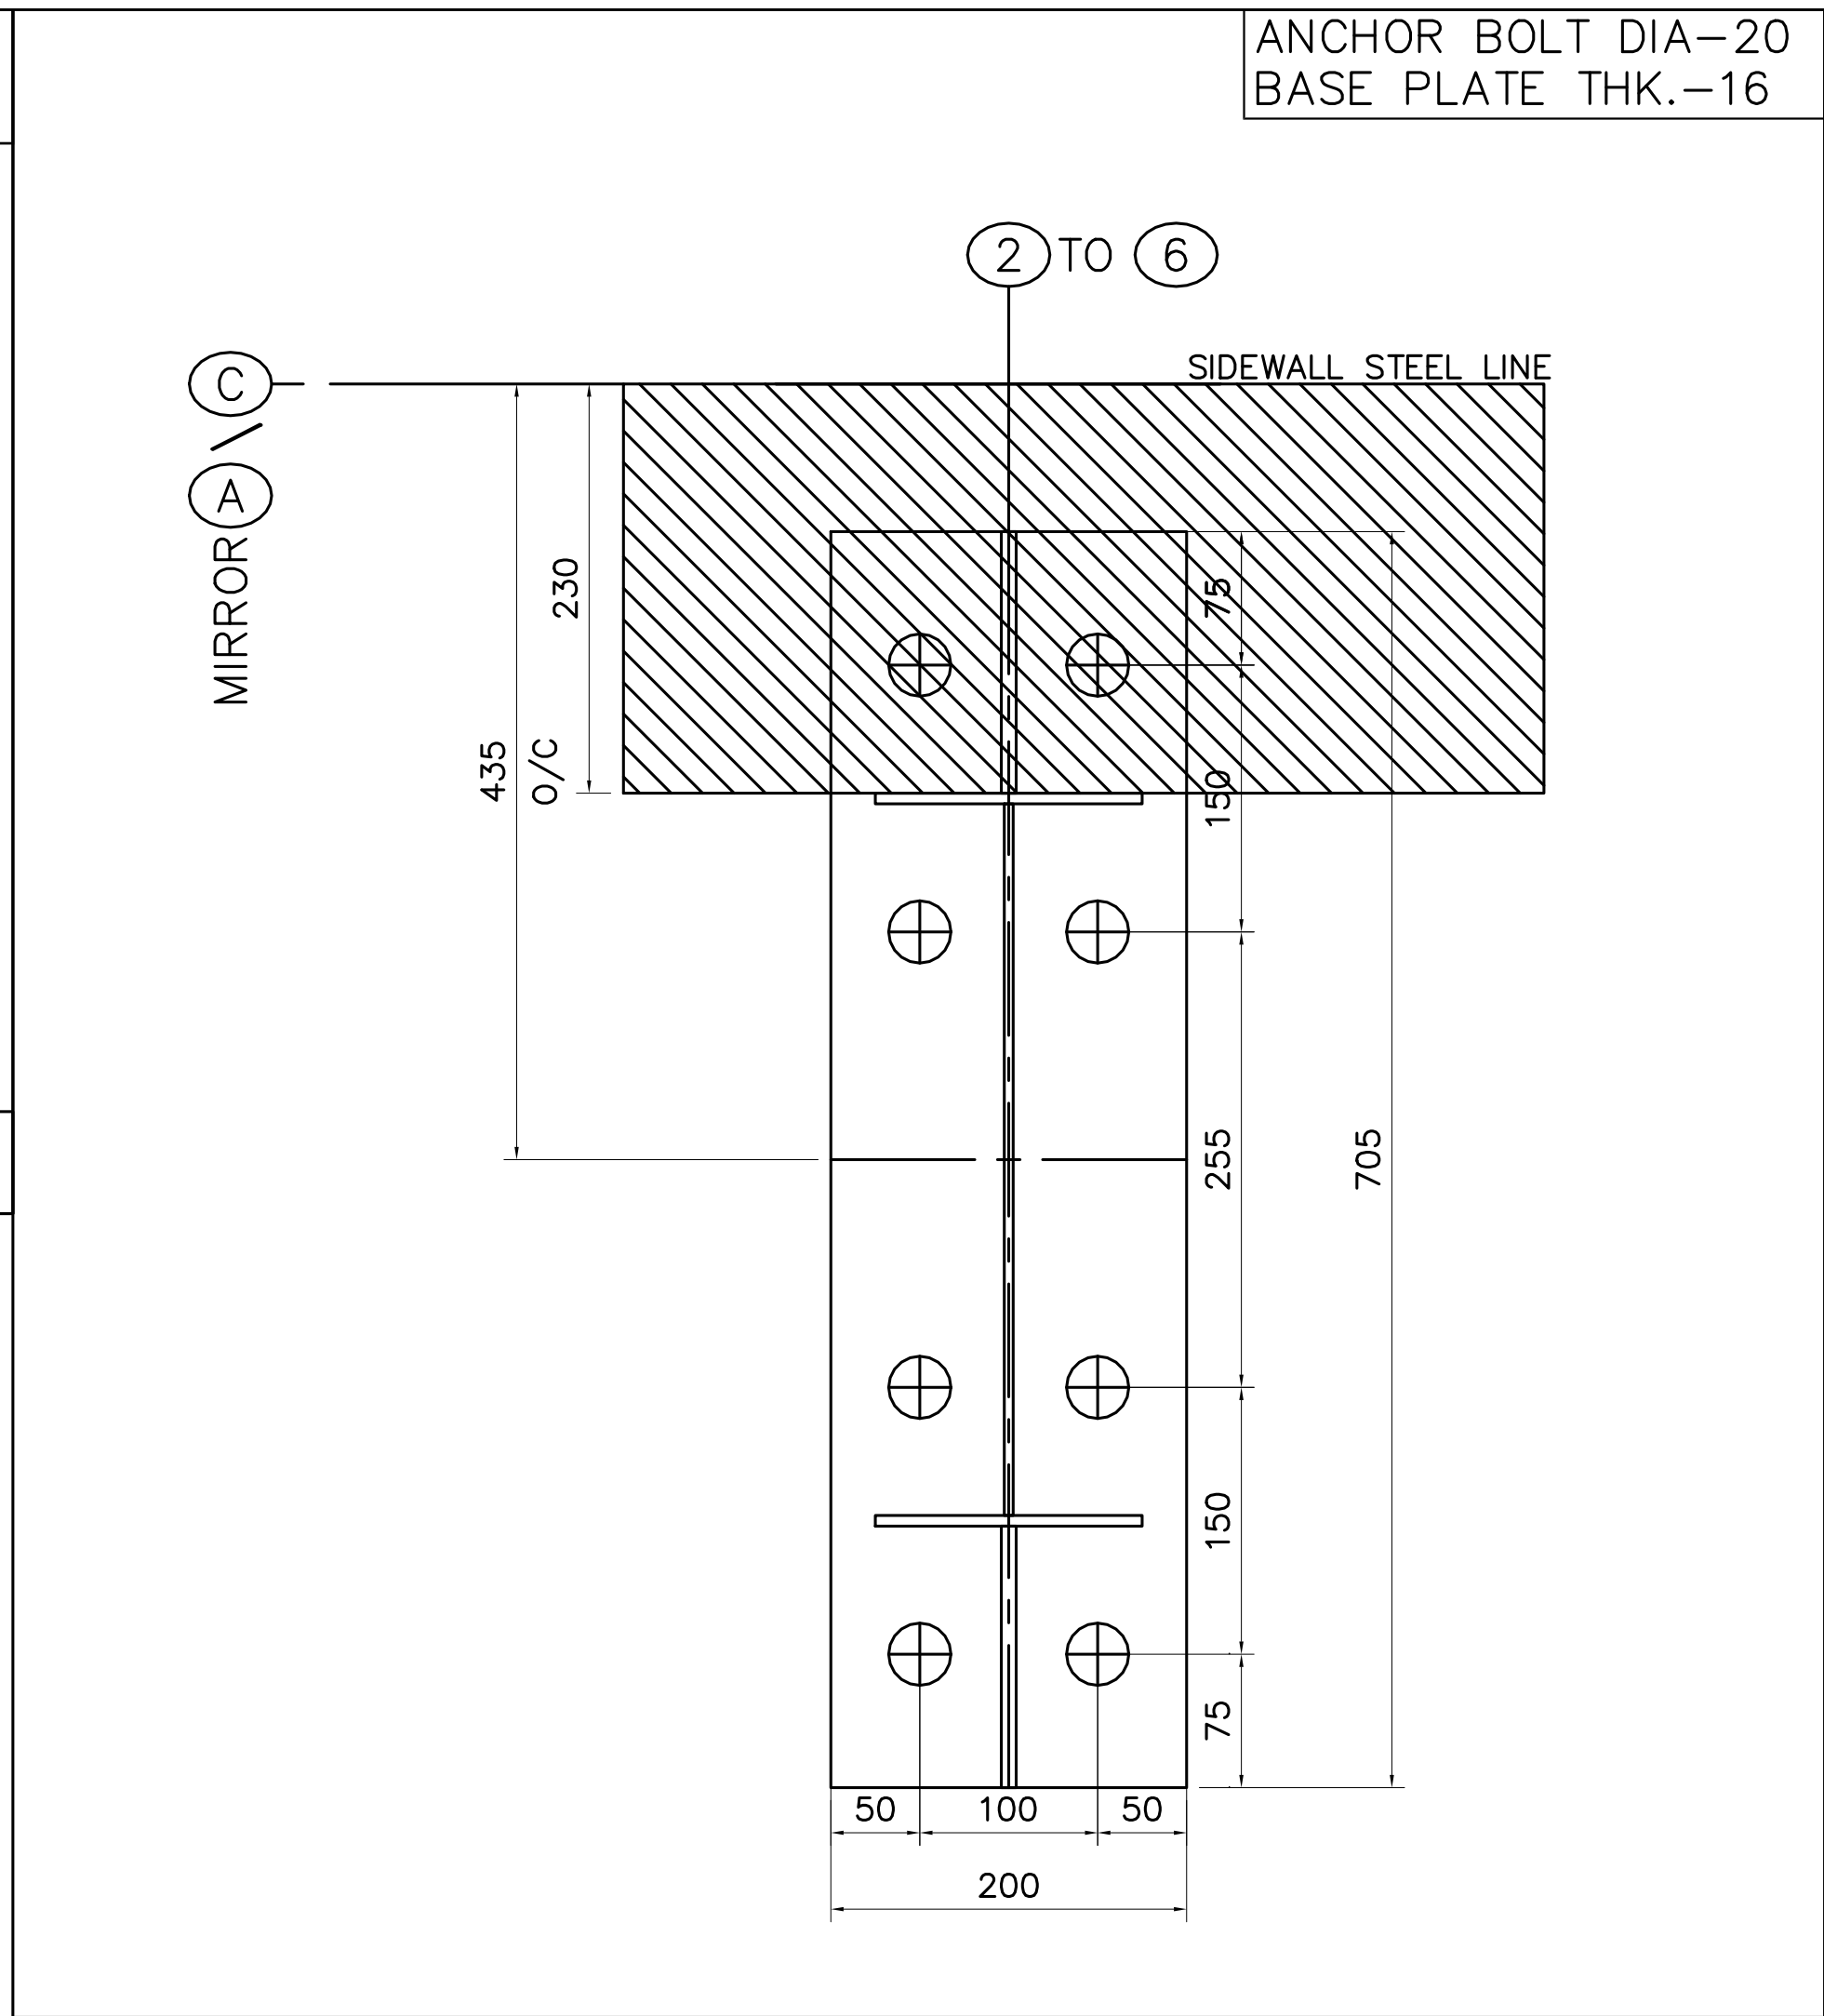

DETAIL-C

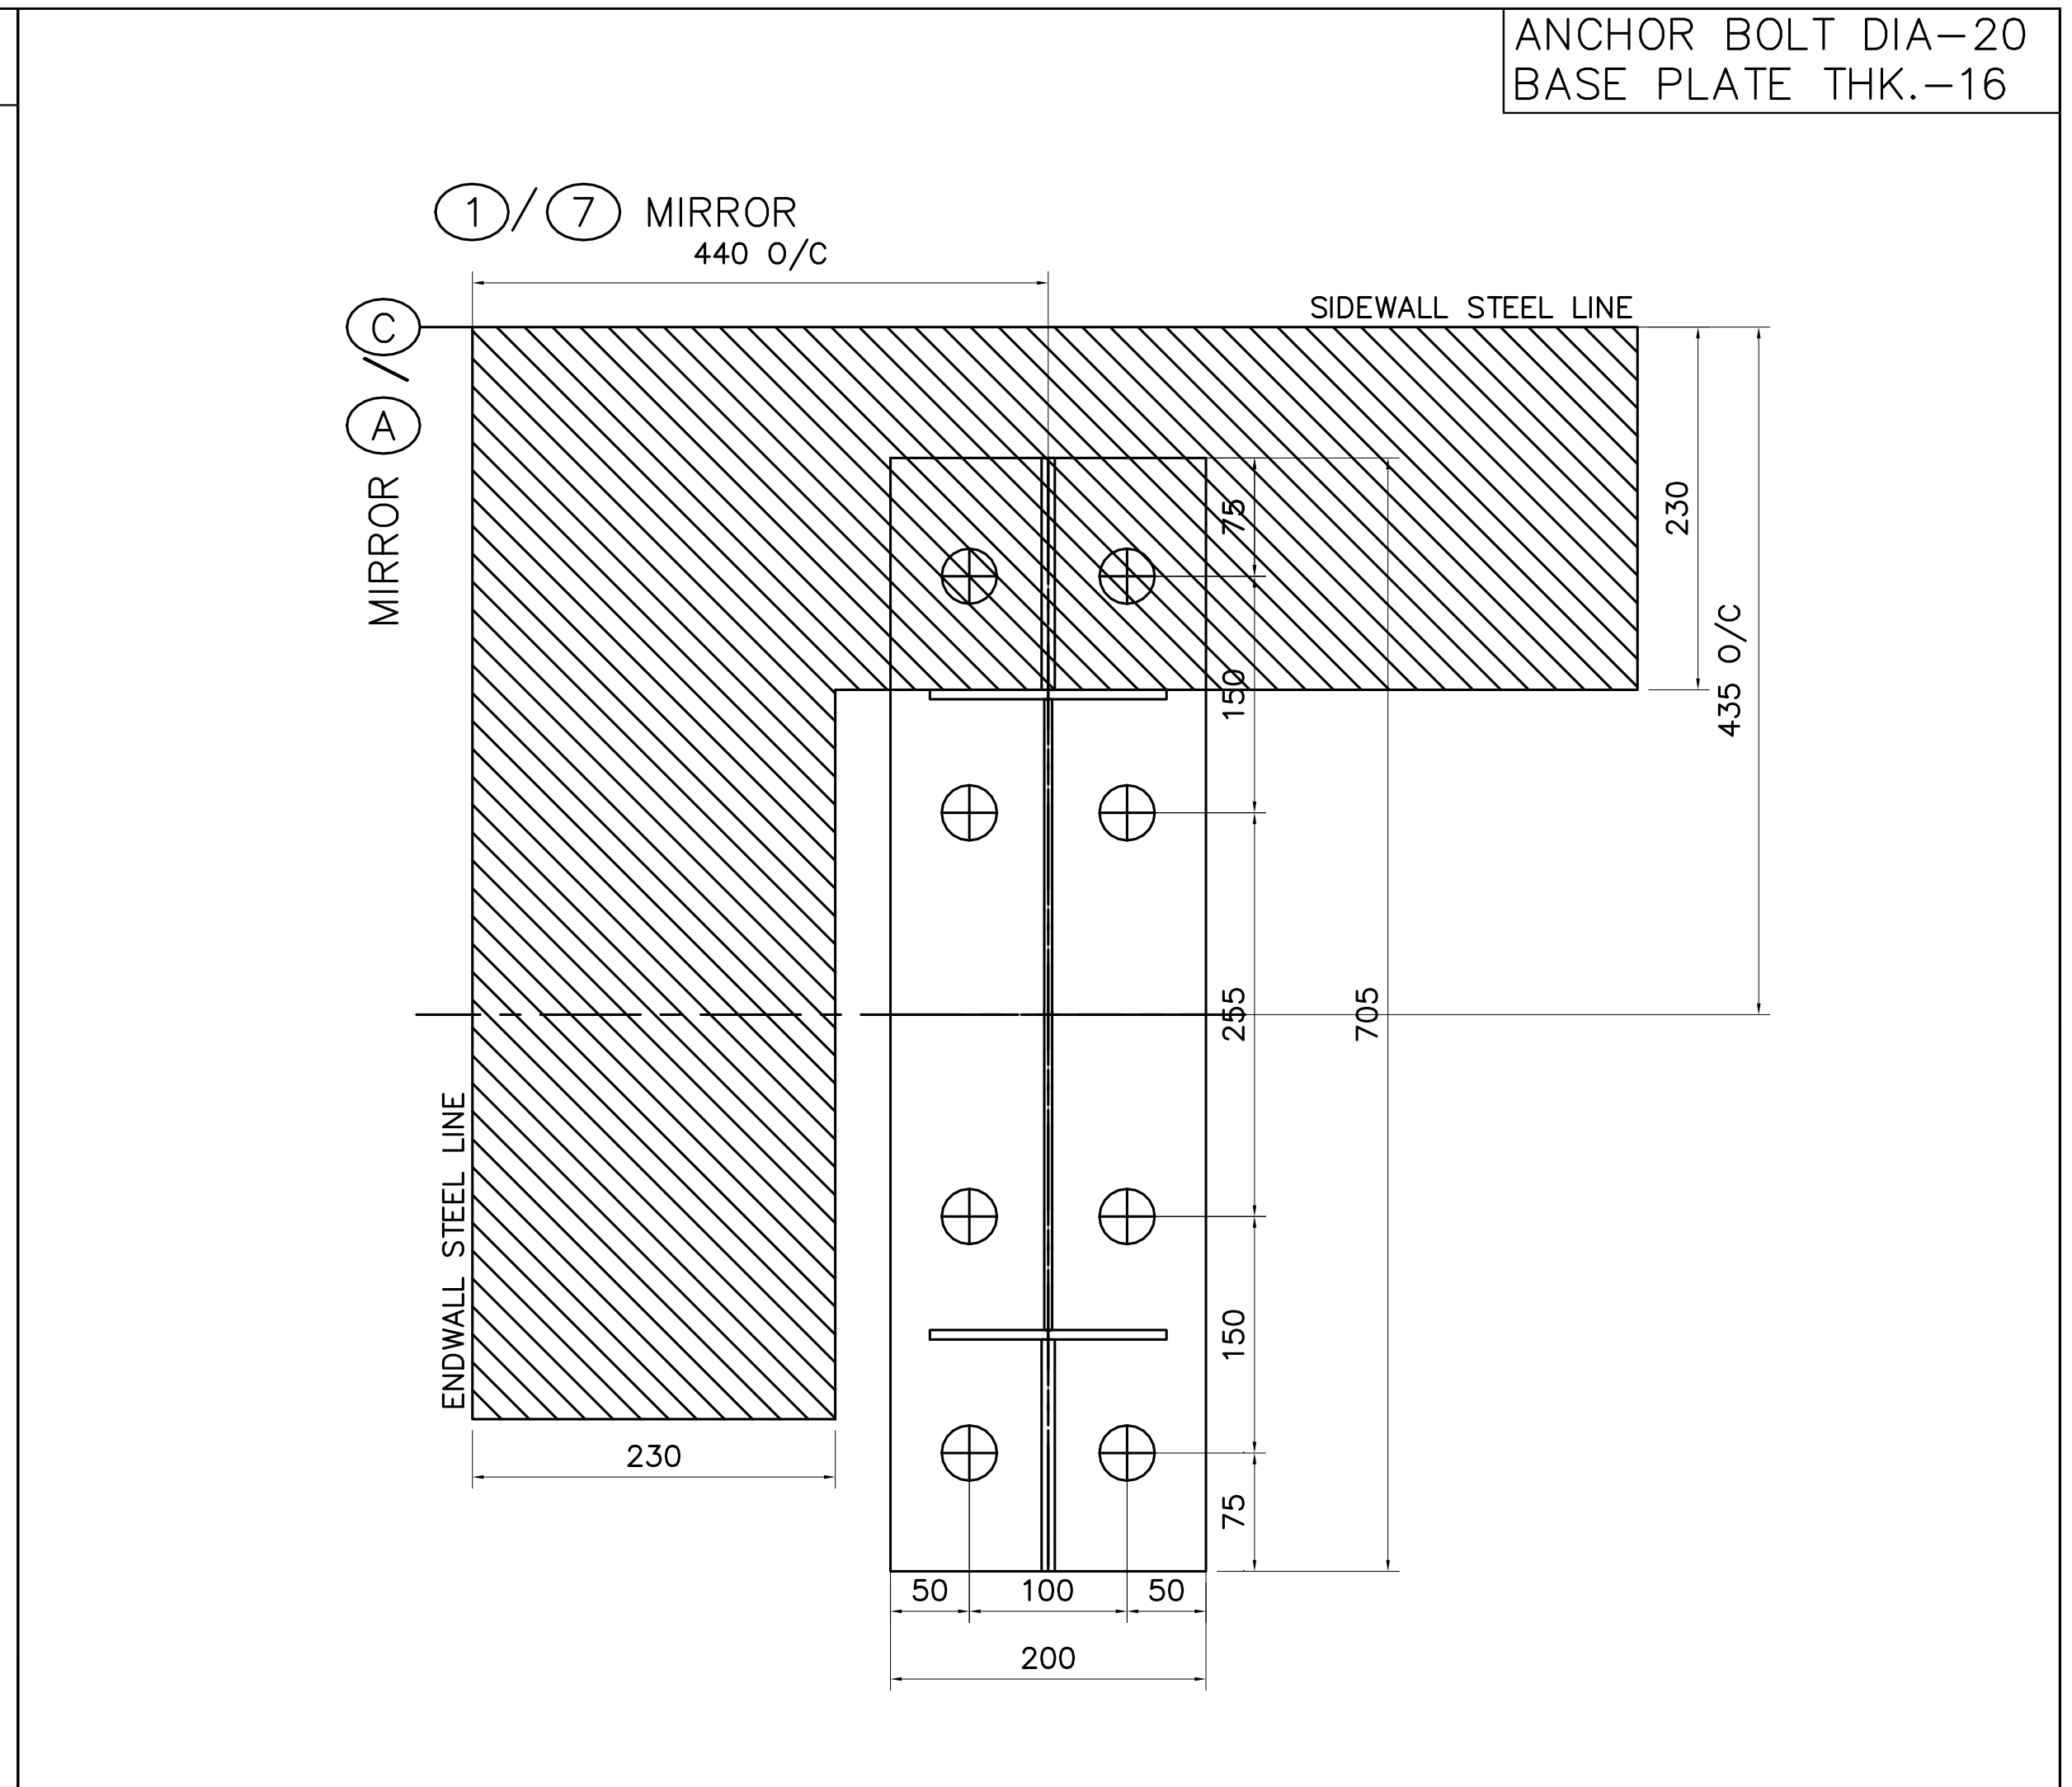

DETAIL-B

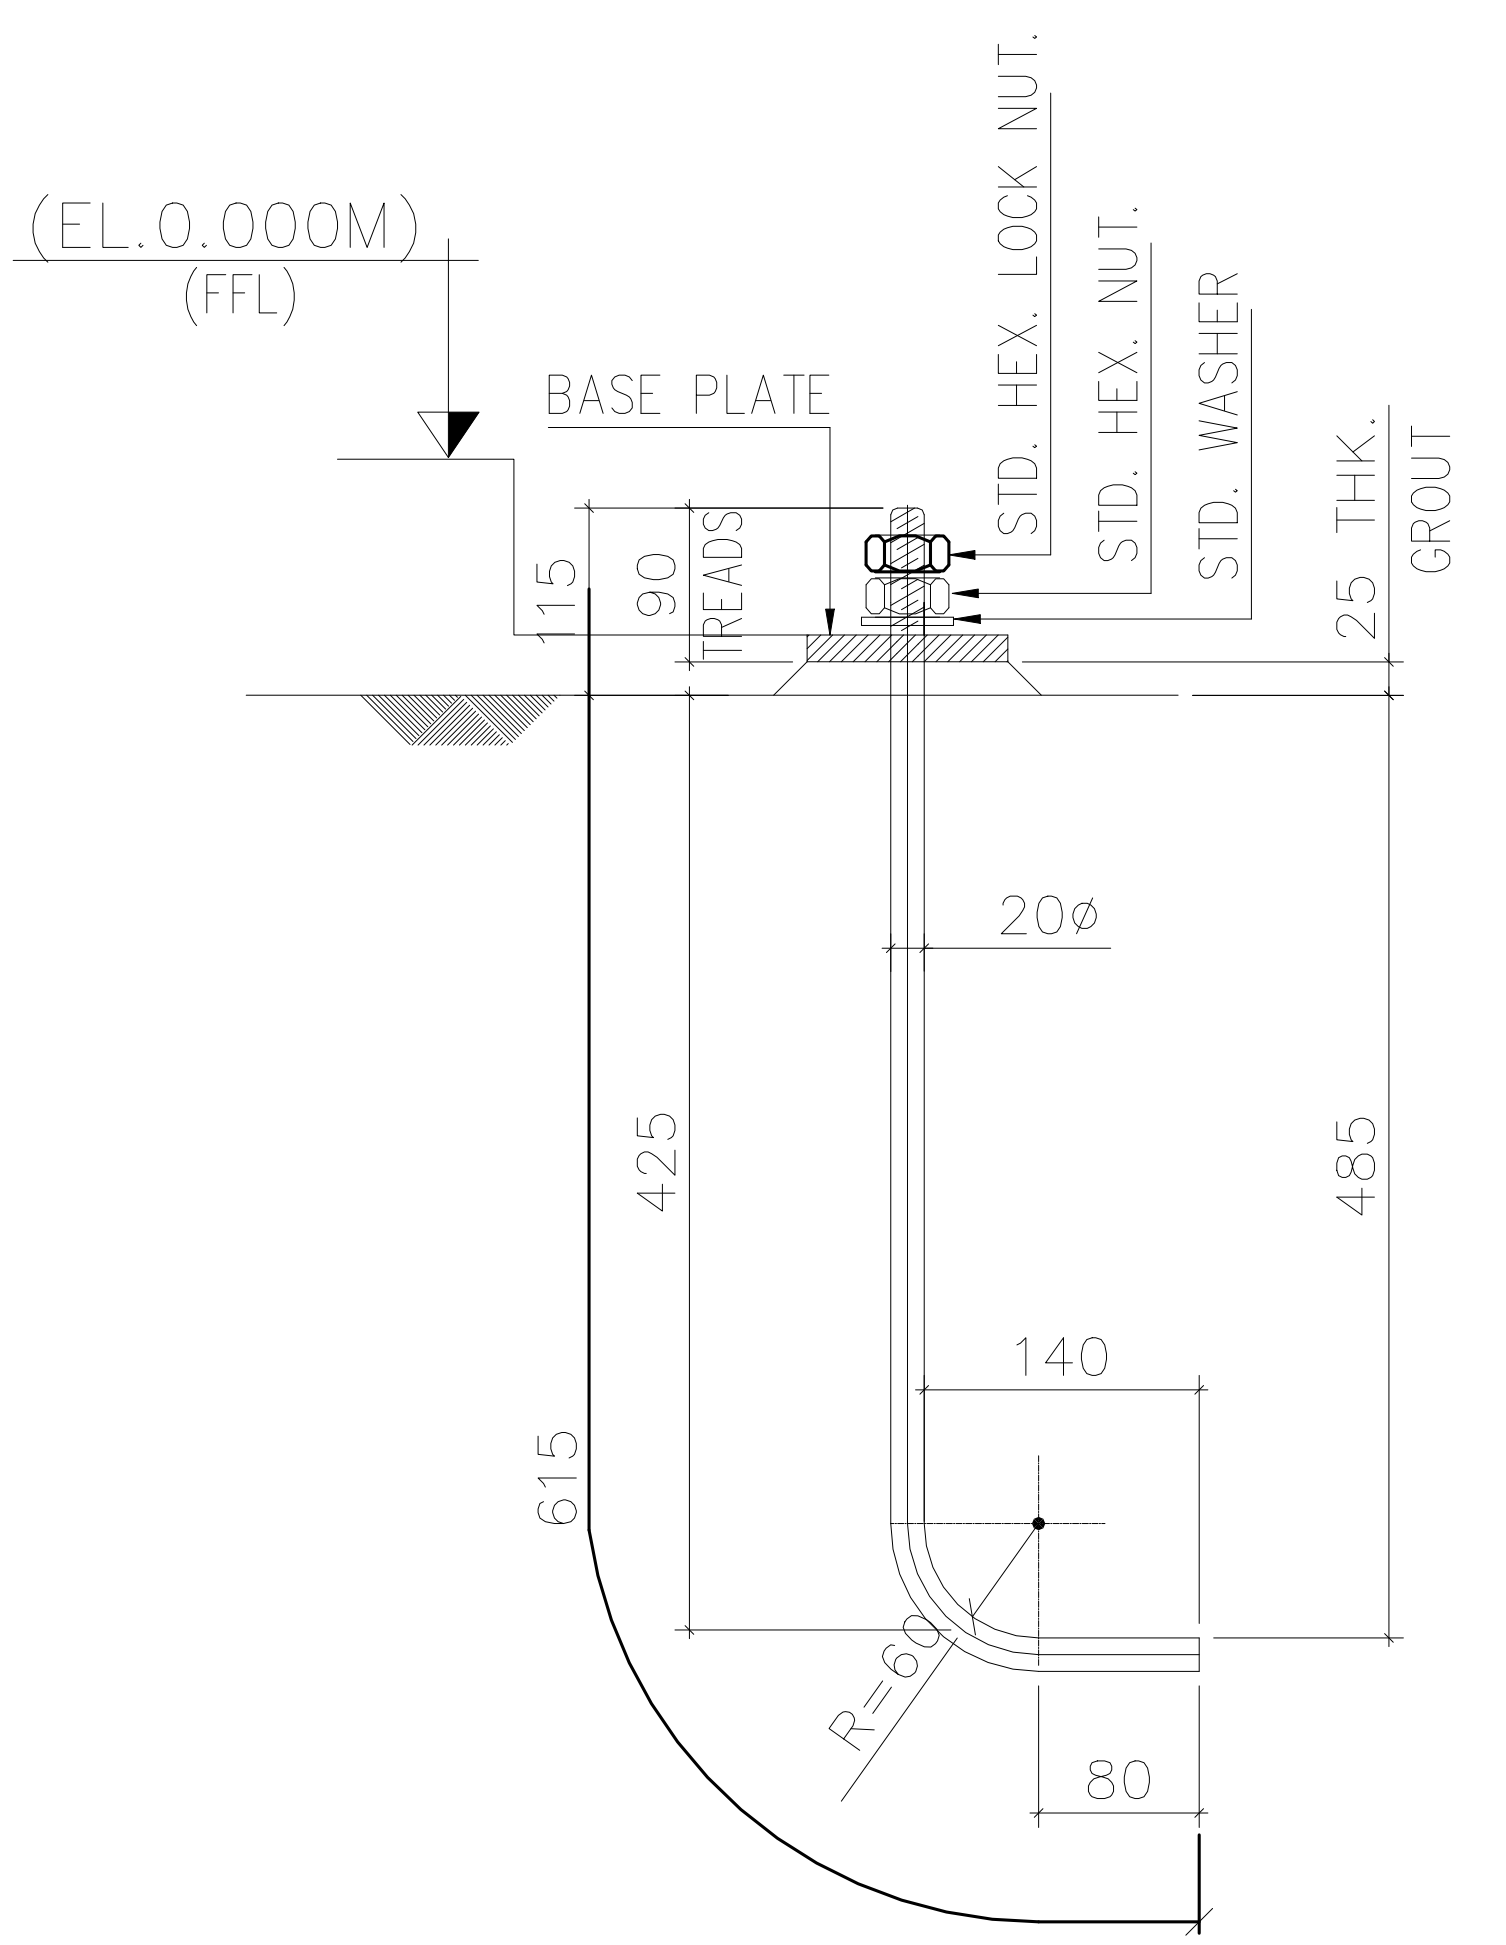

M-20 ANCHOR BOLT DETAIL
(120 Nos. REQD.)

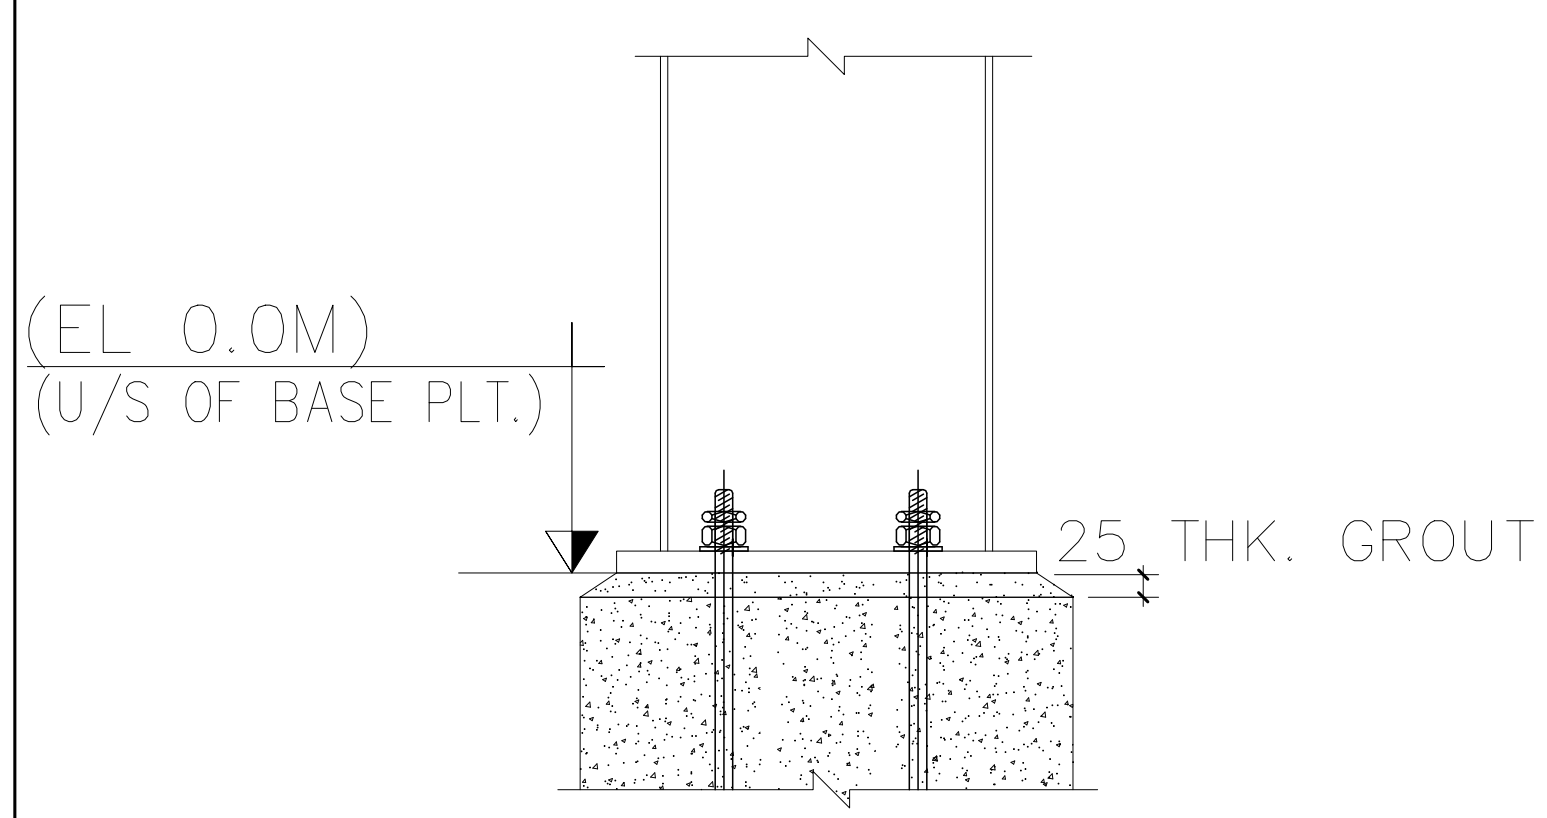

TYPICAL COLUMN BASE DETAIL (U.N.O.)

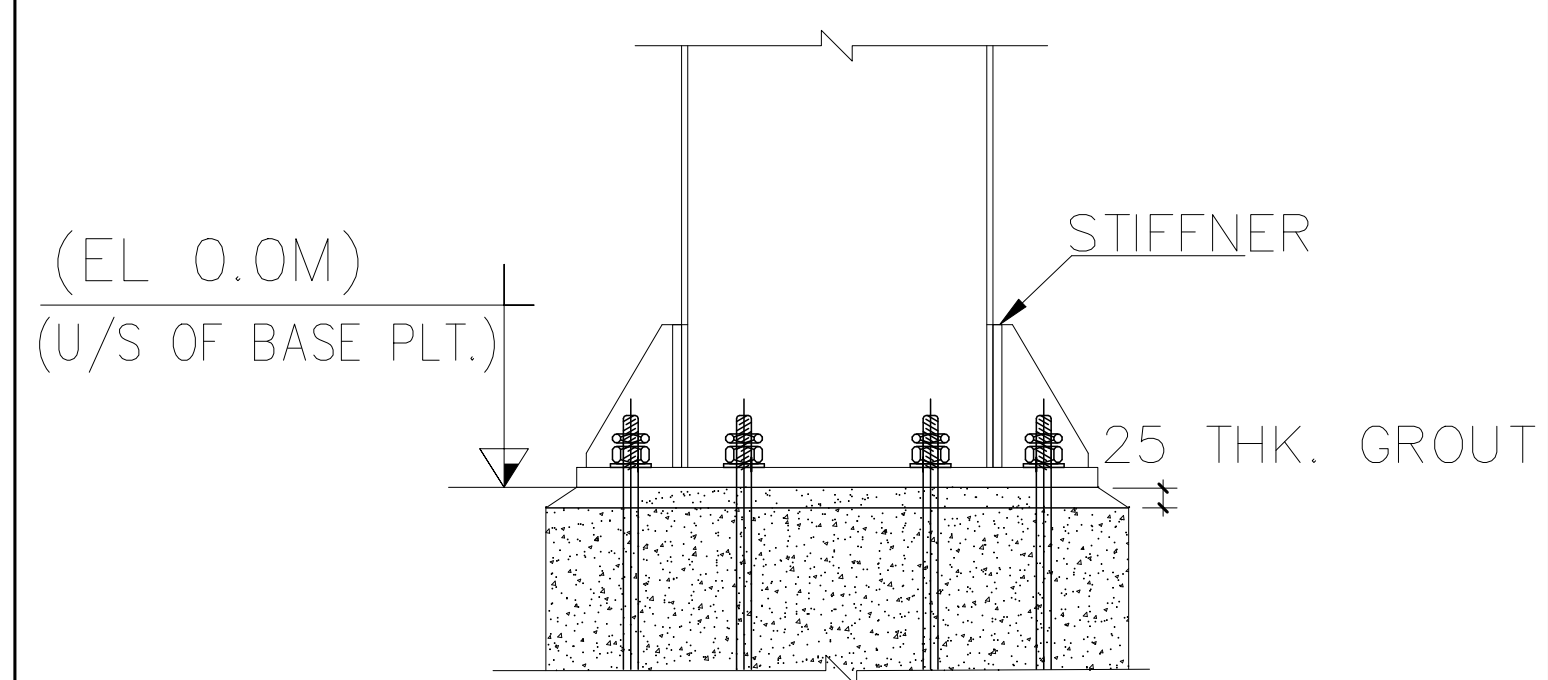

TYPICAL COLUMN BASE DETAIL (U.N.O.)

NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTURAL AND STRUCTURAL DRAWINGS.
2. ALL DIMENSIONS ARE IN MILLIMETERS AND LEVELS ARE IN METERS UNLESS NOTED OTHERWISE.
3. DO NOT SCALE THE DRAWING.
4. ALL HOT ROLLED MEMBERS SHALL CONFORM TO BSEN 10025-S275 OR EQUIVALENT.
5. ALL THE BUILT UP MEMBERS SHALL CONFORM TO ASTM A572 OR BSEN 10025-S355
6. ALL WELDS ARE AWS STANDARD UNLESS OTHERWISE NOTED.
7. BOLTS FOR MAIN STRUCTURAL CONNECTIONS ARE ASTM A325
8. BOLTS FOR BRACINGS, PURLINS, GIRTS ETC.. ARE GRADE 8.8
9. PAINTING SYSTEM AND ALL OTHER TERMS AS PER CONTRACTS.

RECLA

NOTE-THE DRAWING ARE INTENDED SOLELY FOR APPROVAL PURPOSES. CERTAIN PARTS OR DIMENSIONS MAY NOT BE TO SCALE AND THEREFORE MUST NOT BE USED FOR CONSTRUCTION OR ANY OTHER PURPOSE

RECLA INTERNATIONALS PRIVATE LIMITED

PROJECT	SHED	ANCHOR BOLT DETAILS		
ID	C323-153	DESIGN: AAB	DRAFT: AAB	CHECK: VVJ
PROJECT ADDRESS	PUNE	DATE: 07/AUG/2025		
		C323-153_A02		

FRAME LINES: 1 7

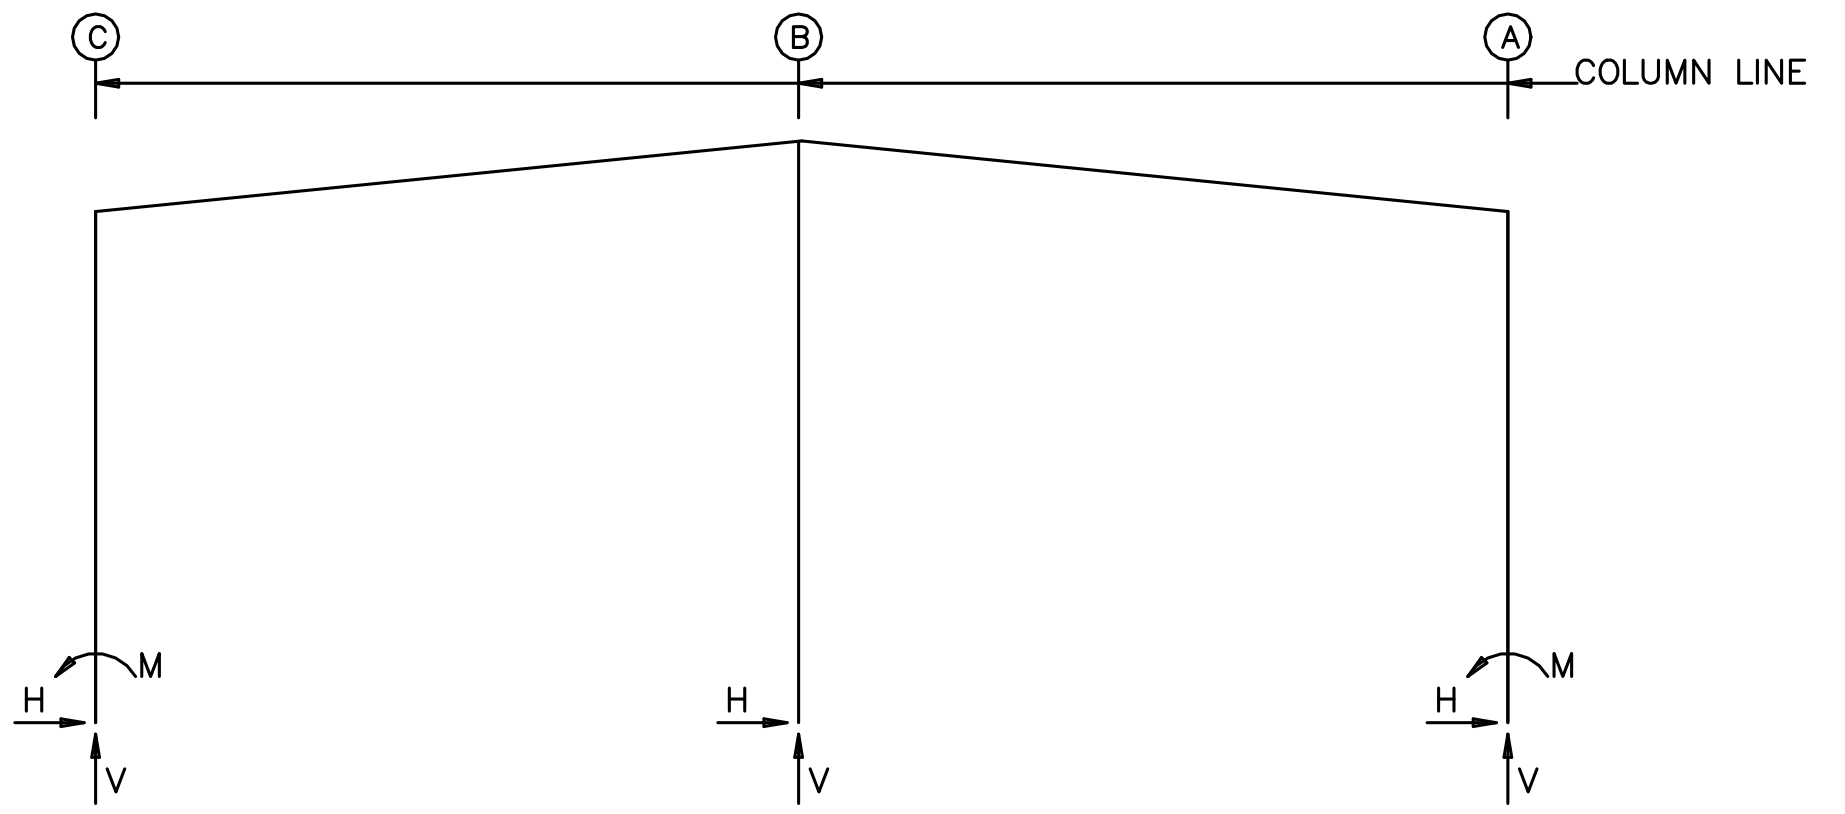

FRAME LINES: 2 3 4 5 6

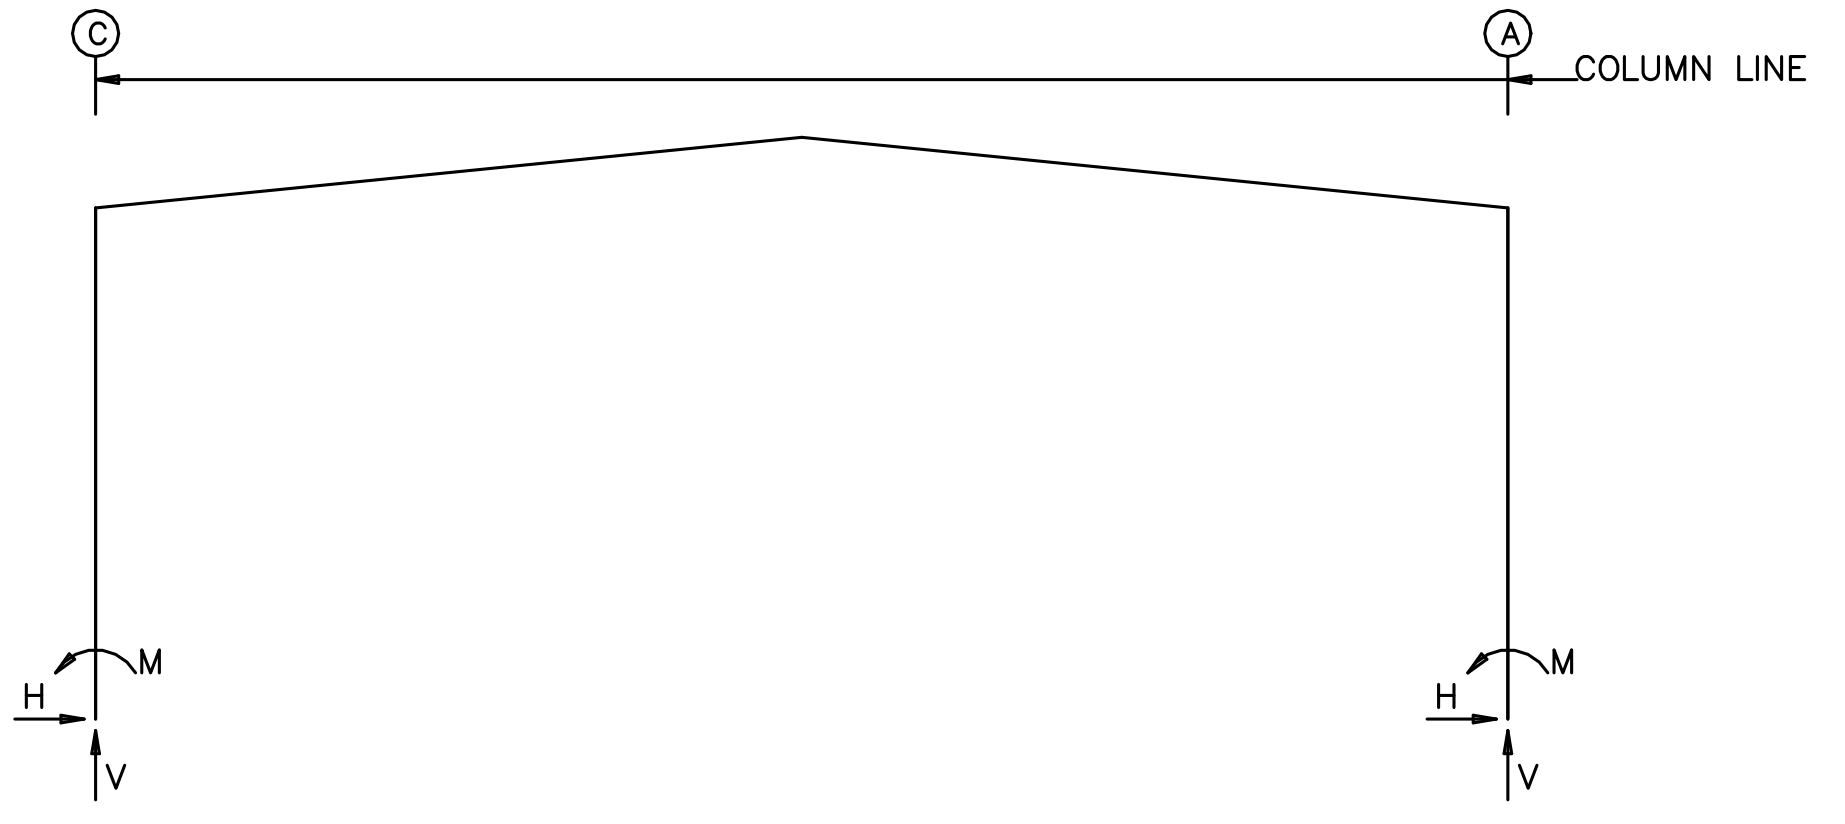

NOTES FOR REACTIONS

1. All loading conditions are examined and only maximum/minimum H or V and the corresponding H or V are reported.
2. Positive reactions are as shown in the sketch. Foundation loads are in opposite directions.
3. Bracing reactions are in the plane of the brace with the H pointing away from the braced bay. The vertical reaction is downward.
4. Building reactions are based on the following building data:

Width	(mm)=	22470
Length	(mm)=	35390
Eave Height	(mm)=	8170/ 8170
Roof Slope	(rise/100) =	10.00/10.00
Roof Dead Load	(kN/m2) =	0.10
Wall Dead Load		
Left Endwall	(kN/m2) =	0.10
Right Endwall	(kN/m2) =	0.10
Front Sidewall	(kN/m2) =	0.10
Back Sidewall	(kN/m2) =	0.10
Live Load	(kN/m2) =	0.57
Collateral Load	(kN/m2) =	0.05
Wind Speed	(m/s) =	39.0
Wind Code	=	MBMA10
Exposure	=	B
Closure	=	Enclosed
Internal Wind Coeff	=	−0.18, +0.18
Risk Category	=	−
Importance − Wind	=	1.00
Importance − Seismic	=	1.00
Seismic Design Category	=	B
Seismic Coeff	(Sms) =	0.16
Temperature Change	=	20

5. Loading conditions are:

1	Dead+Collateral+Live
2	Dead+Collateral+0.75Live+0.75Wind_Right2+0.75Floor_Live
3	Dead+Collateral+0.75Live+0.75Wind_Long2L+0.75Floor_Live+0.75LWIND2_L2E
4	0.6Dead+Wind_Left1
5	0.6Dead+Wind_Right1
6	0.6Dead+Wind_Left2
7	0.6Dead+Wind_Right2
8	0.6Dead+Wind_Long1L+LWIND1_L2E
9	0.6Dead+Wind_Long1L+LWIND1_R2E
10	Dead+Collateral+F1CRANEA2
11	Dead+Collateral+F1CRANEA3
12	Dead+Wind_Left1/2+F1CRANEA1
13	Dead+Wind_Right1/2+F1CRANEA4
14	Dead+Collateral+F2CRANEA2
15	Dead+Collateral+F2CRANEA3
16	0.6Dead+Wind_Right1+Wind_Suction
17	0.6Dead+Wind_Pressure+Wind_Long1L

RIGID FRAME: BASIC COLUMN REACTIONS (kN,kN−m)

Frame	Column	Dead			Collateral			Live			Wind_Left1		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	1.3	7.5	−2.07	0.5	1.7	−0.81	5.4	19.3	−9.17	−17.1	−25.5	39.42
1*	A	−1.3	7.5	2.08	−0.5	1.7	0.81	−5.4	19.3	9.22	−9.4	−12.1	25.08
1*	B	0.0	10.7	0.00	0.0	3.3	0.00	−0.8a	37.2	0.00	0.0	−34.9	0.00

Frame	Column	Wind_Right1			Wind_Left2			Wind_Right2			Wind_Press		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	9.4	−12.0	−25.14	−20.5	−18.1	42.71	6.0	−4.7	−21.85	0.0	0.0	0.00
1*	A	17.1	−25.4	−39.45	−6.0	−4.7	21.80	20.5	−18.1	−42.72	0.0	0.0	0.00
1*	B	0.0	−34.9	0.00	0.0	−23.1	0.00	0.0	−23.1	0.00	−27.8a	0.0	0.00

Frame	Column	Wind_Suct			Wind_Long1			Wind_Long2			Seismic_Left		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	0.0	0.0	0.00	4.8	−17.4	−3.62	1.3	−10.1	−0.33	−1.3	−0.2	8.20
1*	A	0.0	0.0	0.00	−4.8	−17.4	3.58	−1.3	−10.1	0.31	−1.3	0.2	8.20
1*	B	32.6a	0.0	0.00	0.0	−29.3	0.00	0.0	−17.5	0.00	0.0	0.0	0.00

Frame	Column	Seismic_Right			Temp			F1CRANEA1			F1CRANEA2		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	1.3	0.2	−8.20	0.9	0.4	−4.92	0.3	59.3	27.94	8.1	60.0	−11.21
1*	A	1.3	−0.2	−8.20	−0.9	0.4	4.92	−8.1	18.1	36.23	−0.3	17.4	−2.91
1*	B	0.0	0.0	0.00	0.0	−0.7	0.00	0.0	−0.7	0.00	0.0	−0.7	0.00

Frame	Column	F1CRANEA3			F1CRANEA4			LWIND1_L2E			LWIND1_R2E		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	0.3	17.4	3.01	8.1	18.1	−36.14	−0.2	−5.1	−3.83	−0.8	0.0	5.34
1*	A	−8.1	60.0	11.28	−0.3	59.3	−27.86	0.8	0.0	−5.35	0.2	−5.1	3.82
1*	B	0.0	−0.7	0.00	0.0	−0.7	0.00	0.0	−0.4	0.00	0.0	−0.5	0.00

Frame	Column	LWIND2_L2E			LWIND2_R2E			F1PAT_LL_1			F1PAT_LL_2		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
1*	C	−0.2	−5.1	−3.83	−0.8	0.0	5.34	2.7	21.4	16.52	2.7	−2.1	−25.69
1*	A	0.8	0.0	−5.35	0.2	−5.1	3.82	−2.7	−2.1	25.73	−2.7	21.4	−16.51
1*	B	0.0	−0.4	0.00	0.0	−0.5	0.00	0.0	18.4	0.00	0.0	18.8	0.00

Frame	Column	Dead			Collateral			Live			Wind_Left1		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	5.8	12.2	−12.93	2.1	3.4	−4.76	24.0	39.0	−53.97	−27.0	−31.6	69.23
2*	A	−5.8	12.2	12.98	−2.1	3.4	4.78	−24.0	39.0	54.20	−0.1	−22.5	3.10

Frame	Column	Wind_Right1			Wind_Left2			Wind_Right2			Wind_Long1		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	0.1	−22.5	−3.25	−27.5	−18.0	62.31	−0.4	−8.9	−10.16	−9.6	−48.3	31.21
2*	A	27.0	−31.6	−69.39	0.4	−8.9	10.09	27.5	−18.0	−62.40	9.6	−48.6	−31.39

Frame	Column	Wind_Long2			Seismic_Left			Seismic_Right			Seismic_Long1		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	−7.3	−34.6	20.51	−1.2	−0.2	7.15	1.2	0.2	−7.15	0.0	−2.0	0.00
2*	A	7.3	−35.0	−20.61	−1.2	0.2	7.16	1.2	−0.2	−7.16	0.0	−2.0	0.00

Frame	Column	Seismic_Long2			Temp			F2CRANEA1			F2CRANEA2		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	0.0	2.0	0.00	0.5	0.0	−4.00	0.2	62.1	27.37	8.2	63.1	−10.76
2*	A	0.0	2.0	0.00	−0.5	0.0	4.00	−8.2	20.4	34.57	−0.2	19.5	−3.57

Frame	Column	F2CRANEA3			F2CRANEA4			LWIND1_L2E			LWIND1_R2E		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	0.2	19.5	3.66	8.2	20.4	−34.47	−0.4	−5.4	−3.36	−1.0	−0.3	5.94
2*	A	−8.2	63.1	10.83	−0.2	62.2	−27.31	1.0	−0.3	−5.95	0.4	−5.4	3.36

Frame	Column	LWIND2_L2E			LWIND2_R2E		
Line	Line	Horz	Vert	Mom	Horz	Vert	Mom
2*	C	−0.4	−5.4	−3.36	−1.0	−0.3	5.94
2*	A	1.0	−0.3	−5.95	0.4	−5.4	3.36

1* Frame lines: 1 7
2* Frame lines: 2 3 4 5 6

a − Out−Of−Plane Horizontal Load

RIGID FRAME: ANCHOR BOLTS & BASE PLATES

Frm Line	Col Line	Anc._Bolt Qty	Anc._Bolt Dia	Base_Plate (mm) Width	Base_Plate (mm) Length	Base_Plate (mm) Thick	Grout (mm)	
1*	C	8	20	200	705	16	0	Moment connection. See table.
1*	A	8	20	200	705	16	0	Moment connection. See table.
1*	B	4	20	200	450	16	0	

1* Frame lines: 1 7

RIGID FRAME: ANCHOR BOLTS & BASE PLATES

Frm Line	Col Line	Anc._Bolt Qty	Anc._Bolt Dia	Base_Plate (mm) Width	Base_Plate (mm) Length	Base_Plate (mm) Thick	Grout (mm)	
2*	C	8	20	200	705	16	0	Moment connection. See table.
2*	A	8	20	200	705	16	0	Moment connection. See table.

2* Frame lines: 2 3 4 5 6

BUILDING BRACING REACTIONS

Wall Loc	Wall Line	Col Line		Reactions in plane of wall: Reactions(kN) Wind Horz	Reactions(kN) Seismic Horz	Panel_Shear (N/m) Wind	Panel_Shear (N/m) Seis	Note
L_EW	1							(h)
F_SW	A	2,3	*	12.2	2.0			
		5,6	*	12.2	2.0			
R_EW	7							(h)
B_SW	C	6,5	*	11.9	2.0			
		3,2	*	11.9	2.0			

(h)Rigid frame at endwall

*See RF reactions table for vertical and horizontal reactions in plane of the rigid frame.

Reactions for seismic represent shear force, Eh
Reaction values shown are unfactored

RECLA

NOTE−THE DRAWING ARE INTENDED SOLELY FOR APPROVAL PURPOSES. CERTAIN PARTS OR DIMENSIONS MAY NOT BE TO SCALE AND THEREFORE MUST NOT BE USED FOR CONSTRUCTION OR ANY OTHER PURPOSE

RECLA INTERNATIONALS PRIVATE LIMITED

PROJECT	SHED			
ID	C323−153	DESIGN: AAB	DRAFT: AAB	CHECK: VVJ
PROJECT ADDRESS	PUNE	DATE: 7/AUG/2025		
		C323−153_A03		

SPLICE PLATES & BOLTS									
Splice Mark	Quan Top	Bot	Int	Bolt Type	Dia	Len	Plate Size Wid	Thick	Length
SP1	4	4	2	Gr8.8	20	90	200	16	900
SP2	4	4	0	Gr8.8	20	90	200	16	500

CAP PLATES							
Col Id	Qnt	Bolt Type	Dia	Len	Plate Size Width	Thick	Length
EC-1	4	Gr8.8	20	90	200	16	410

ALTERNATE MEMBER		
Frame Line	OID	Mark
7	A	CL1-6
	B	CL1-7
	C	EC-2

FLANGE BRACES: FBxx (1 or 2)
xx=length(mm)
(1) One Side; (2) Two Sides
A – L40X40X4

MEMBER TABLE					
Mark	Web Depth Start/End	Web Plate Thick	Length	Outside Flange W x Thk x Length	Inside Flange W x Thk x Length
CL1-1	400/ 700	[redacted]	4000	150 x [redacted] x 7918	150 x [redacted] x 4011
	700/ 700	[redacted]	3918		150 x [redacted] x 3918
RF1-2	401/ 300	[redacted]	4294	125 x [redacted] x 322	125 x [redacted] x 3497
				125 x [redacted] x 4489	
RF1-3	300/ 300	[redacted]	4189	125 x [redacted] x 4189	125 x [redacted] x 4189
RF1-4	302/ 553	[redacted]	5053	150 x [redacted] x 2539	150 x [redacted] x 4992
				150 x [redacted] x 2539	
CL1-5	700/ 700	[redacted]	3684	150 x [redacted] x 7918	150 x [redacted] x 3684
	700/ 400	[redacted]	4234		150 x [redacted] x 4244
EC-1	W40b155				

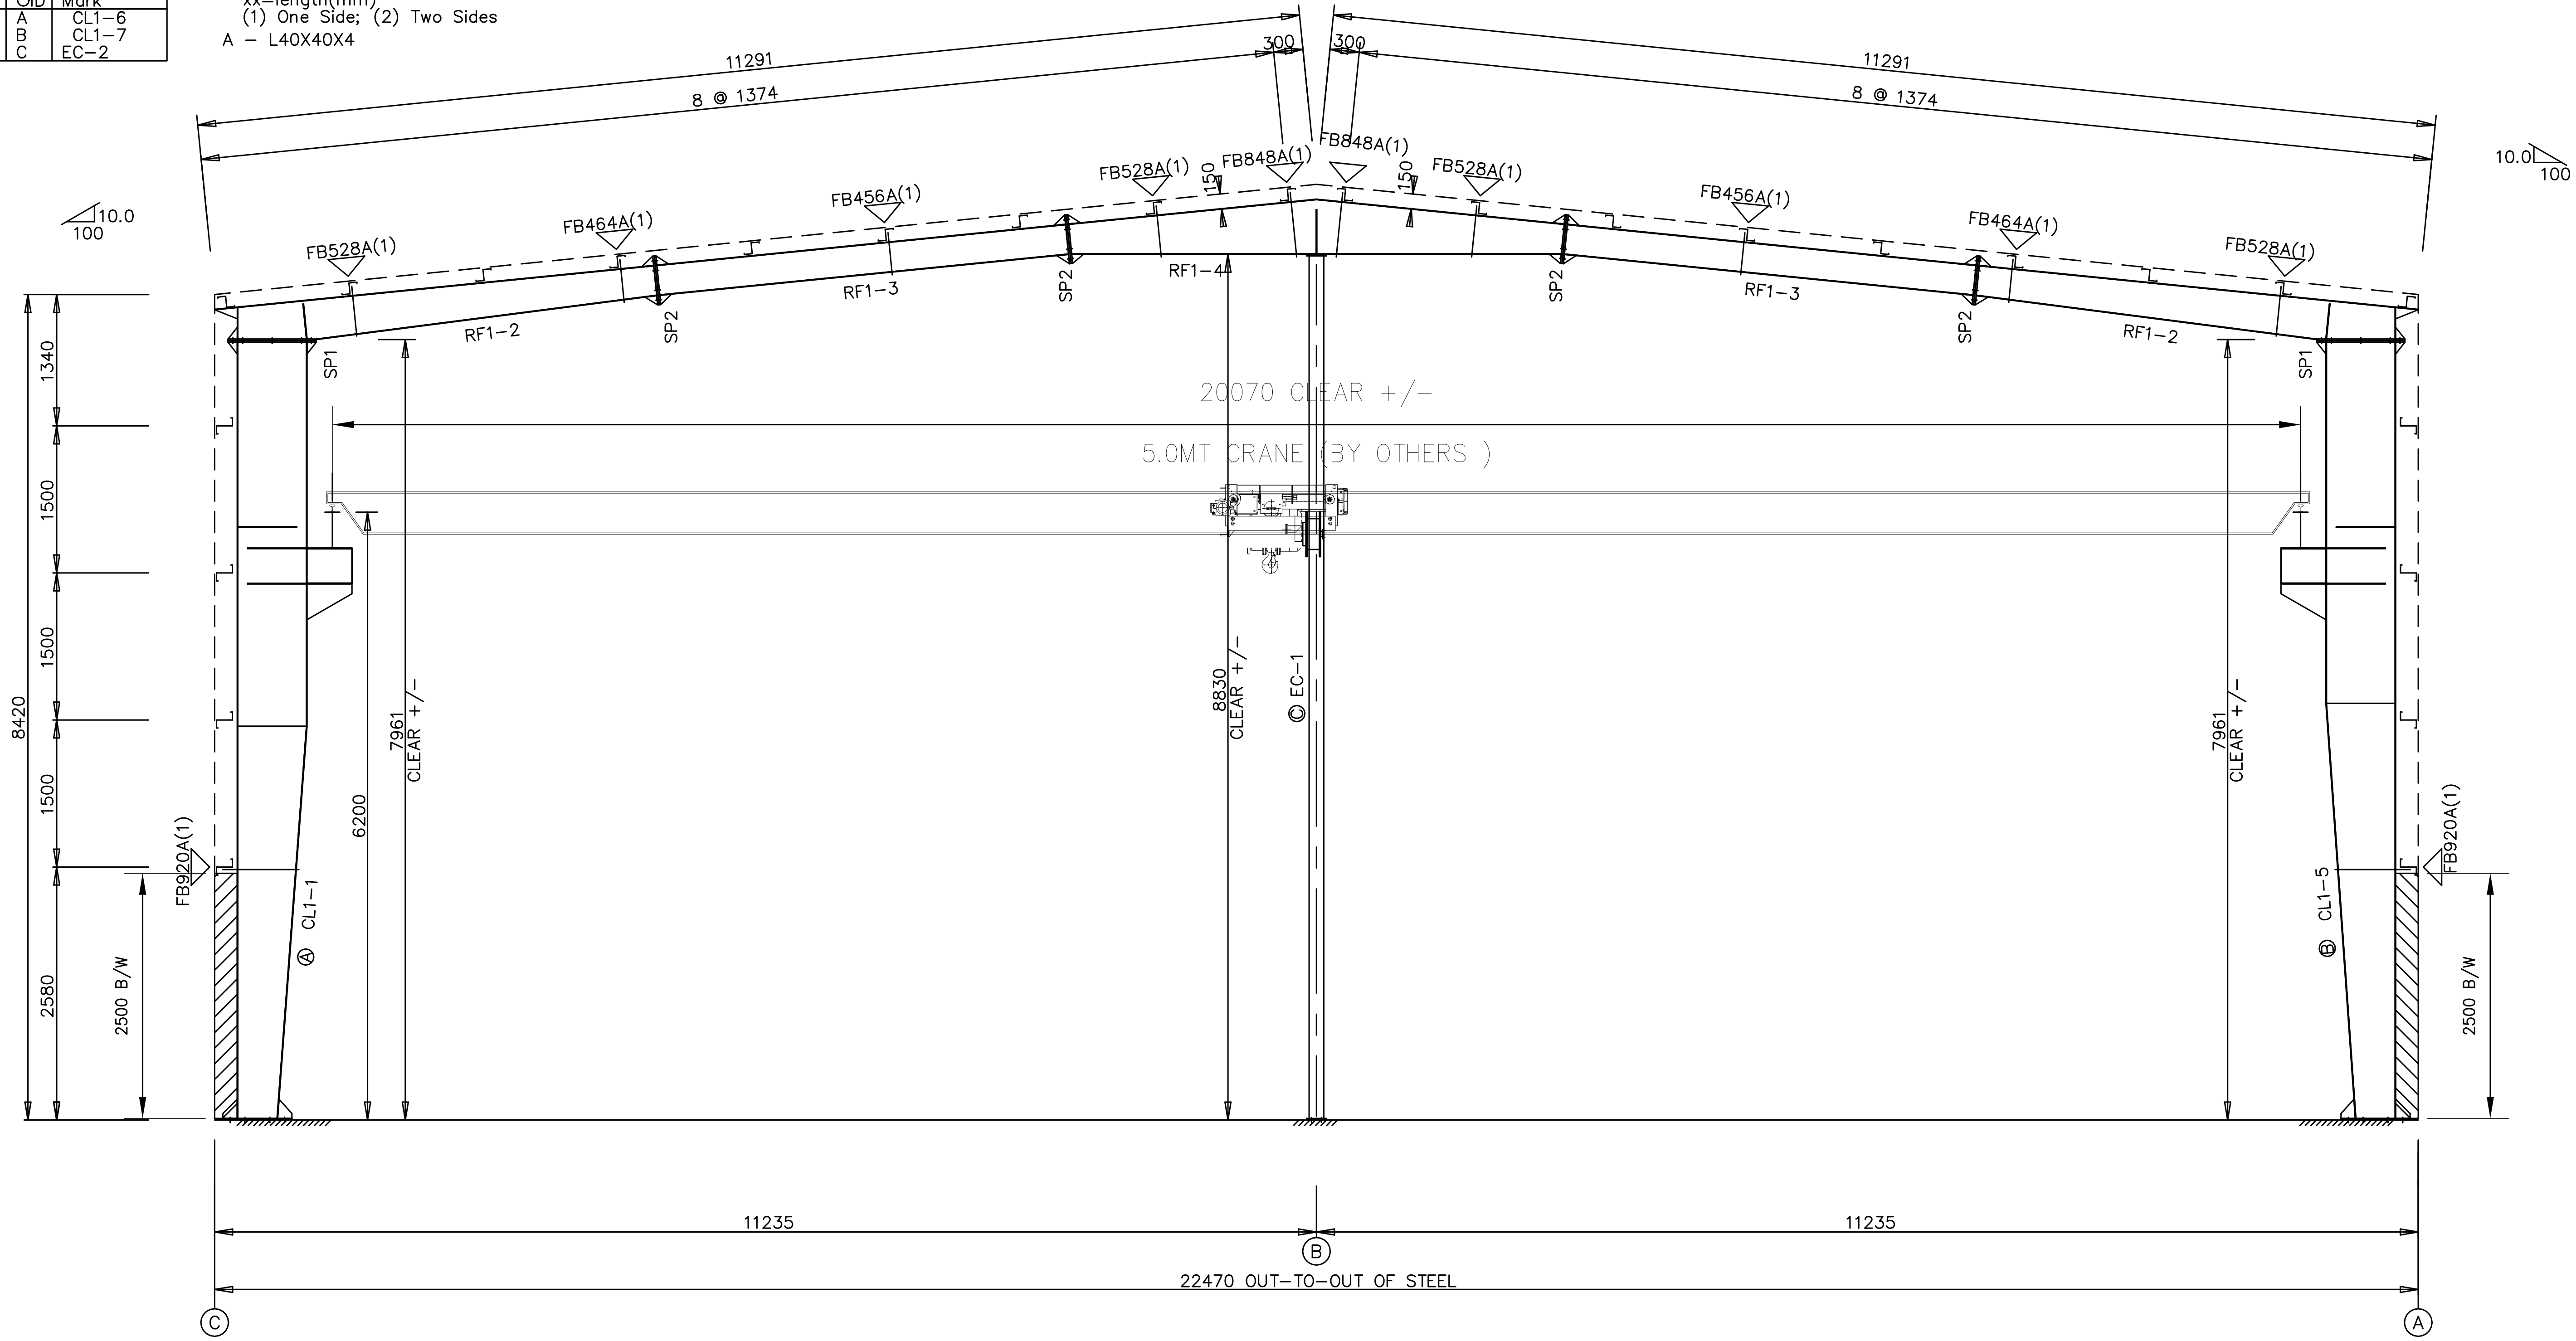

RIGID FRAME ELEVATION: FRAME LINE 1 7

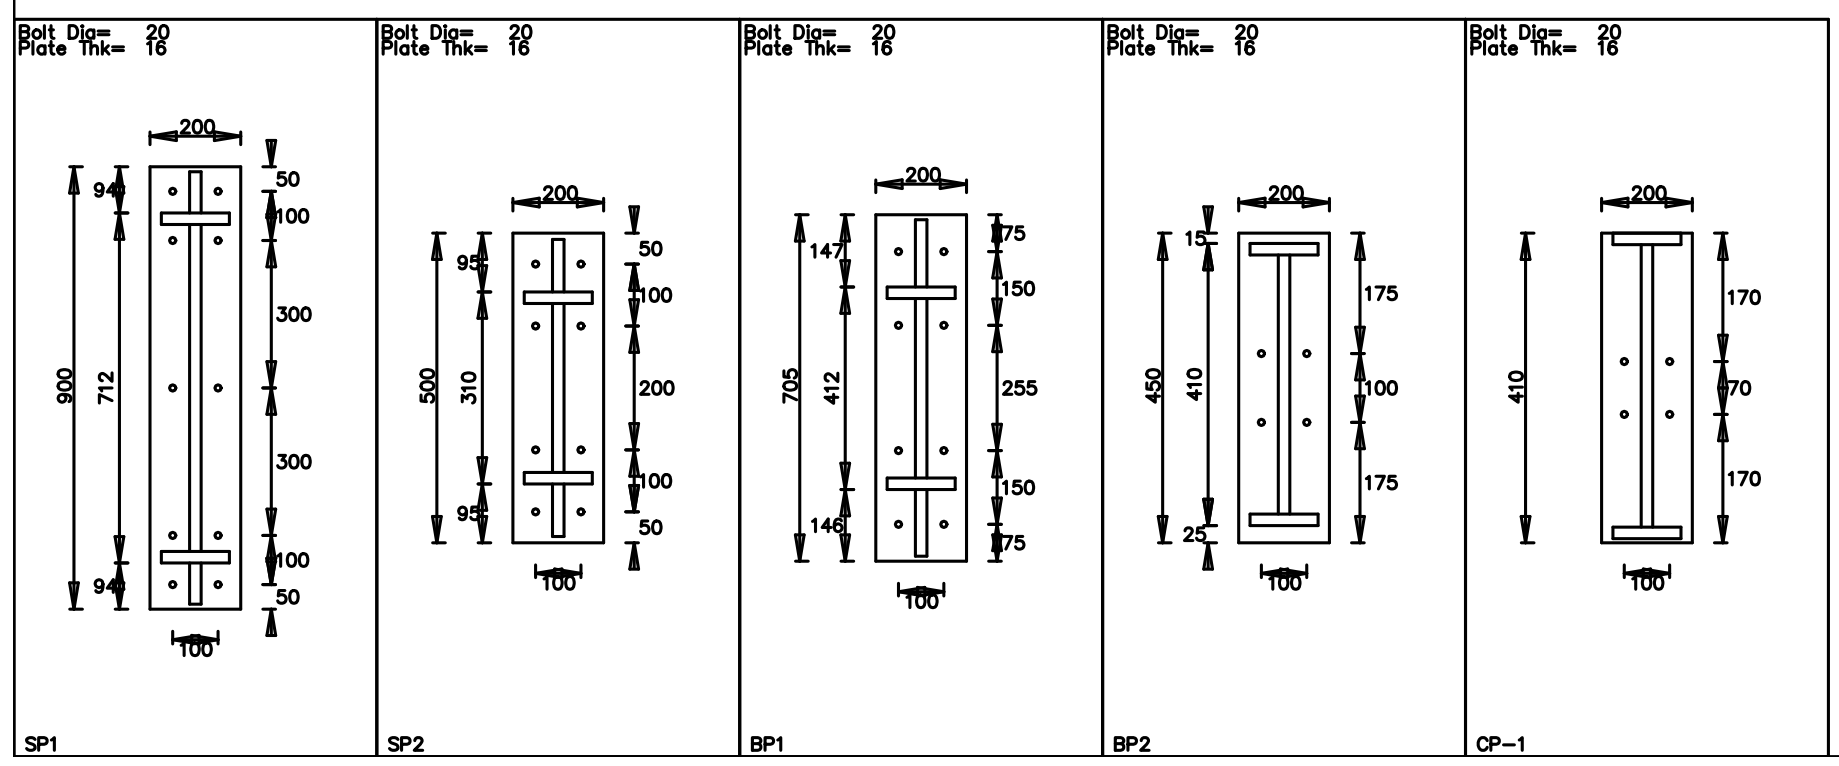

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	RIGID FRAME ELEVATION		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	Warehouse PUNE	DATE: 7/AUG/2025		
		C323-153-A04		

SPLICE PLATES & BOLTS									
Splice Mark	Quan Top	Bot	Int	Bolt Type	Dia	Len	Plate Size Wid	Thick	Length
SP1	4	4	2	Gr8.8	20	90	200	16	900
SP2	4	4	0	Gr8.8	20	90	200	16	450
SP3	4	4	0	Gr8.8	20	90	200	16	653

ALTERNATE MEMBER		
Frame Line	OID	Mark
6	A	CL2-7
	B	CL2-8

FLANGE BRACES: FBxx (1 or 2)
xx=length(mm)
(1) One Side; (2) Two Sides
A – L40X40X4

MEMBER TABLE					
Mark	Web Depth Start/End	Web Plate Thick	Web Plate Length	Outside Flange W x Thk x Length	Inside Flange W x Thk x Length
CL2-1	400/ 700	[redacted]	4000	150 x [redacted] x 7716	150 x [redacted] x 4011
	700/ 700	[redacted]	3716		150 x [redacted] x 3716
RF2-2	521/ 601	[redacted]	799	125 x [redacted] x 523	125 x [redacted] x 3532
	601/ 252	[redacted]	3515	125 x [redacted] x 4489	
RF2-3	250/ 450	[redacted]	6743	125 x [redacted] x 6743	125 x [redacted] x 6701
RF2-4	450/ 250	[redacted]	6796	125 x [redacted] x 6796	125 x [redacted] x 6754
RF2-5	252/ 601	[redacted]	3462	125 x [redacted] x 4436	125 x [redacted] x 3479
	601/ 521	[redacted]	799	125 x [redacted] x 523	
CL2-6	700/ 700	[redacted]	3482	150 x [redacted] x 7716	150 x [redacted] x 3482
	700/ 400	[redacted]	4234		150 x [redacted] x 4244

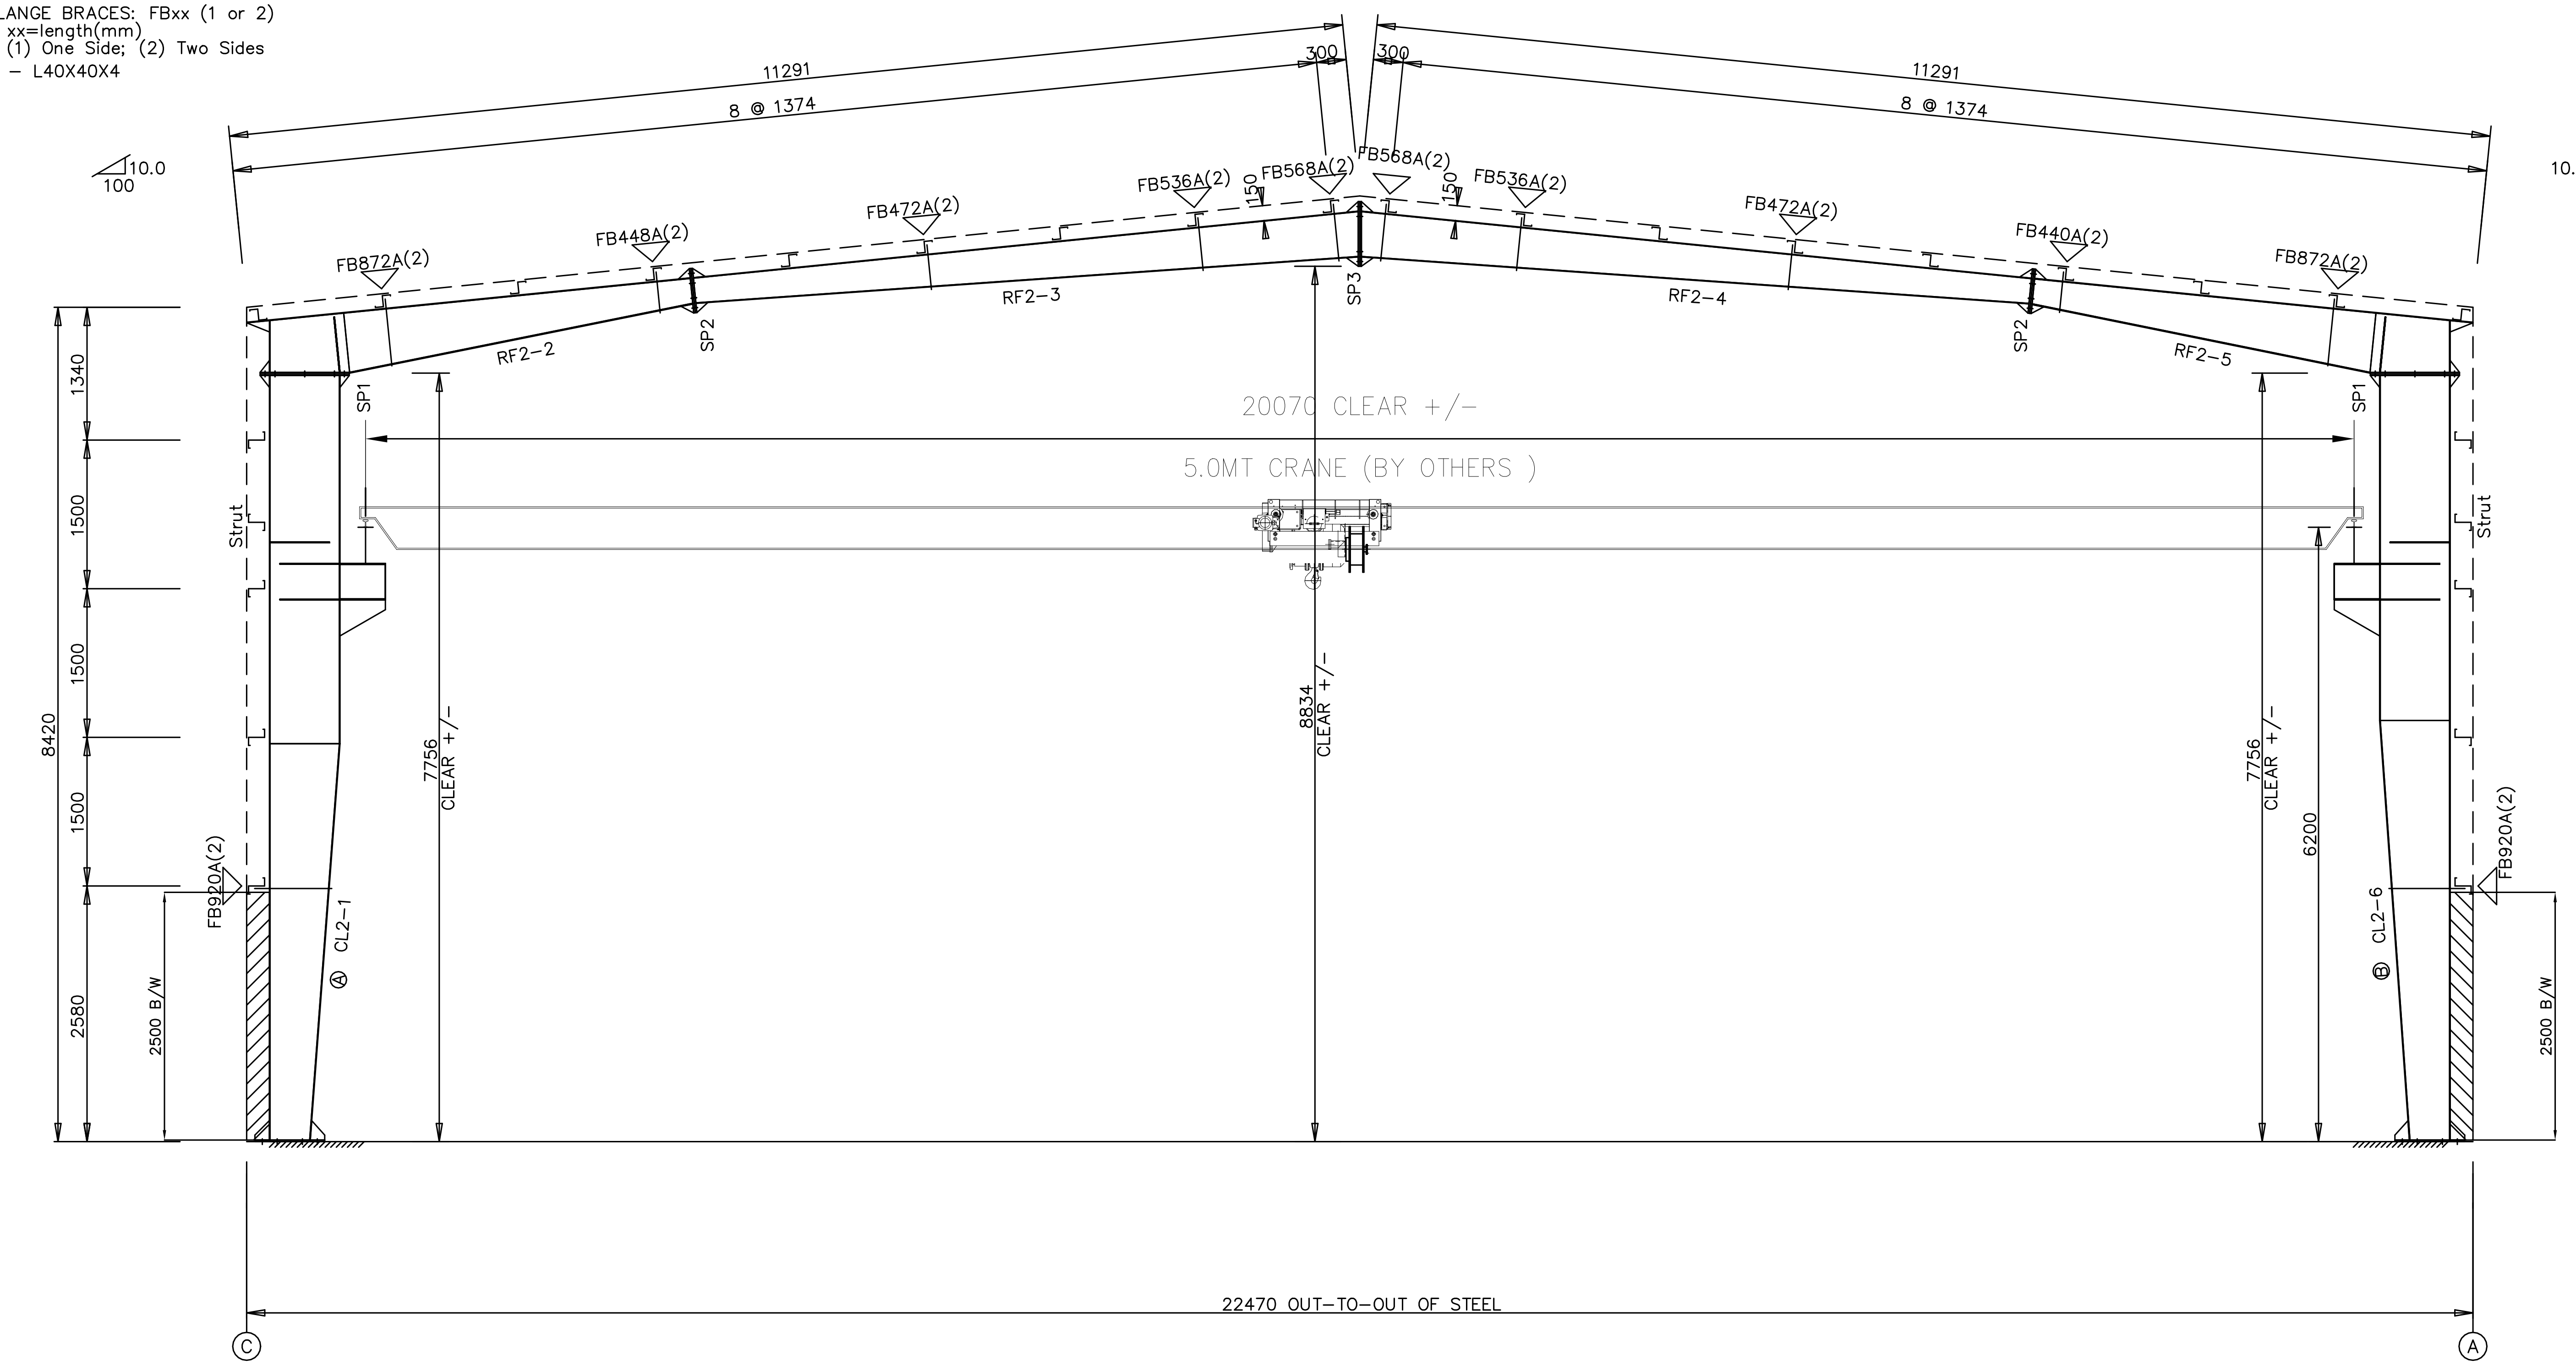

RIGID FRAME ELEVATION: FRAME LINE 2 3 4 5 6

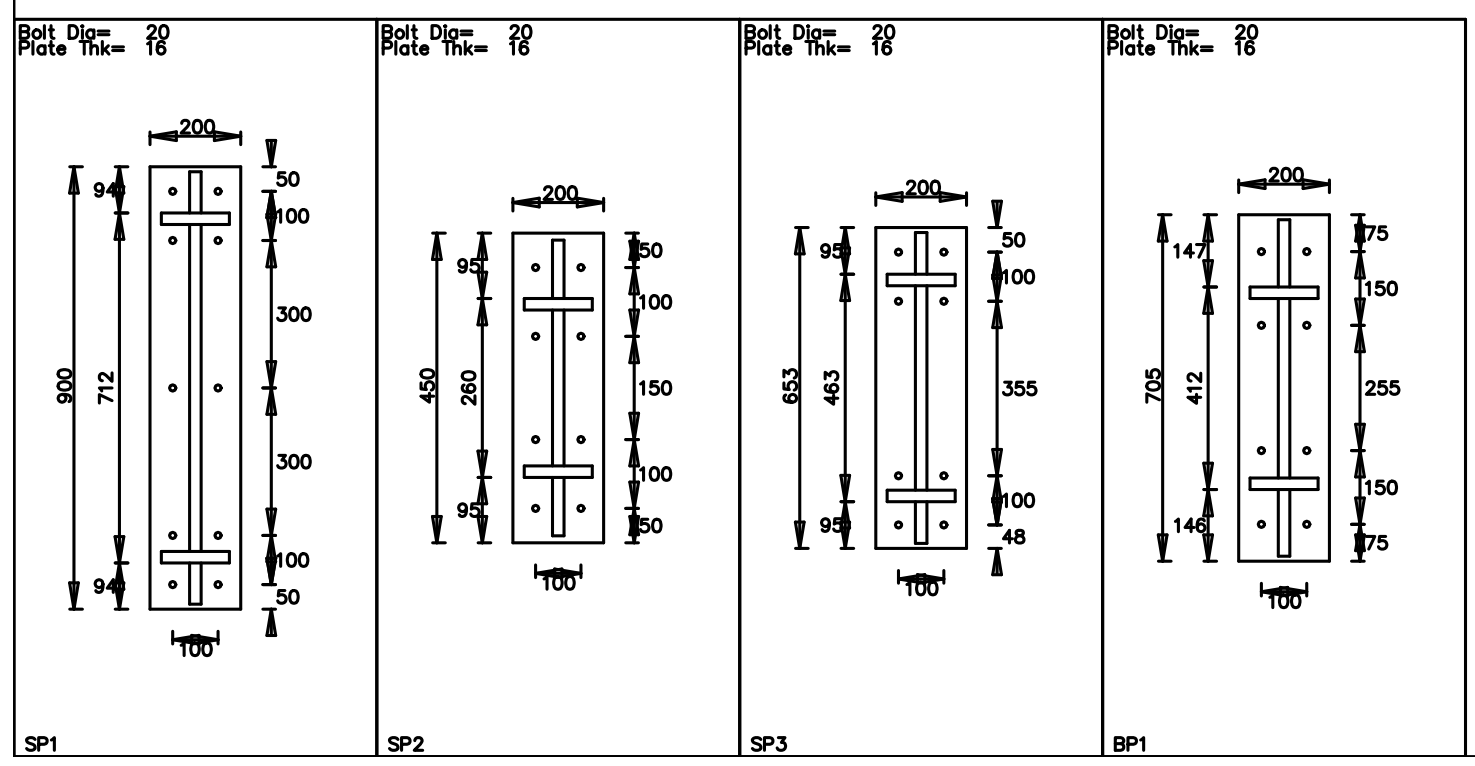

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	RIGID FRAME ELEVATION		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	PUNE	DATE: 7/AUG/2025		
		C323-153-A05		

EXTENSION/CANOPY BOLTS ROOF PLAN				
MARK	QUAN	TYPE	DIA	LENGTH
EB-1	8	Gr8.8	20	90
EB-3	8	Gr8.8	20	90
EB-4	8	Gr8.8	20	90

MEMBER TABLE ROOF PLAN		
MARK	PART	LENGTH
EB-1	BEAM	2272
EB-3	BEAM	1830
EB-4	BEAM	2272
P-1	150Z [redacted]	6570
P-2	150Z [redacted]	6740
P-3	150Z [redacted]	6895
P-4	150Z [redacted]	6450
P-5	150Z [redacted]	6750
P-6	150Z [redacted]	6620
P-7	150Z [redacted]	6570
P-8	150Z [redacted]	6620
P-9	250Z [redacted]	12235
P-10	250Z [redacted]	12235
E-1	150Z [redacted]	6570
E-2	150Z [redacted]	6740
E-3	150Z [redacted]	6895
E-4	150Z [redacted]	6450
E-5	150Z [redacted]	6750
E-6	150Z [redacted]	6620
E-7	150Z [redacted]	6570
E-8	150Z [redacted]	6620
E-9	250Z [redacted]	12240
E-10	250Z [redacted]	12240
CB-4	ROD [redacted]	7770
CB-5	ROD [redacted]	8080
CB-6	ROD [redacted]	7780
CB-7	ROD [redacted]	8090
SP-1	SROD [redacted]	697
SI-1	SROD [redacted]	1474
SE-1	SROD [redacted]	1394
SI-	SROD [redacted]	1519

ANGLE TABLE ROOF PLAN		
◇ID	MARK	LENGTH
	GA	3000

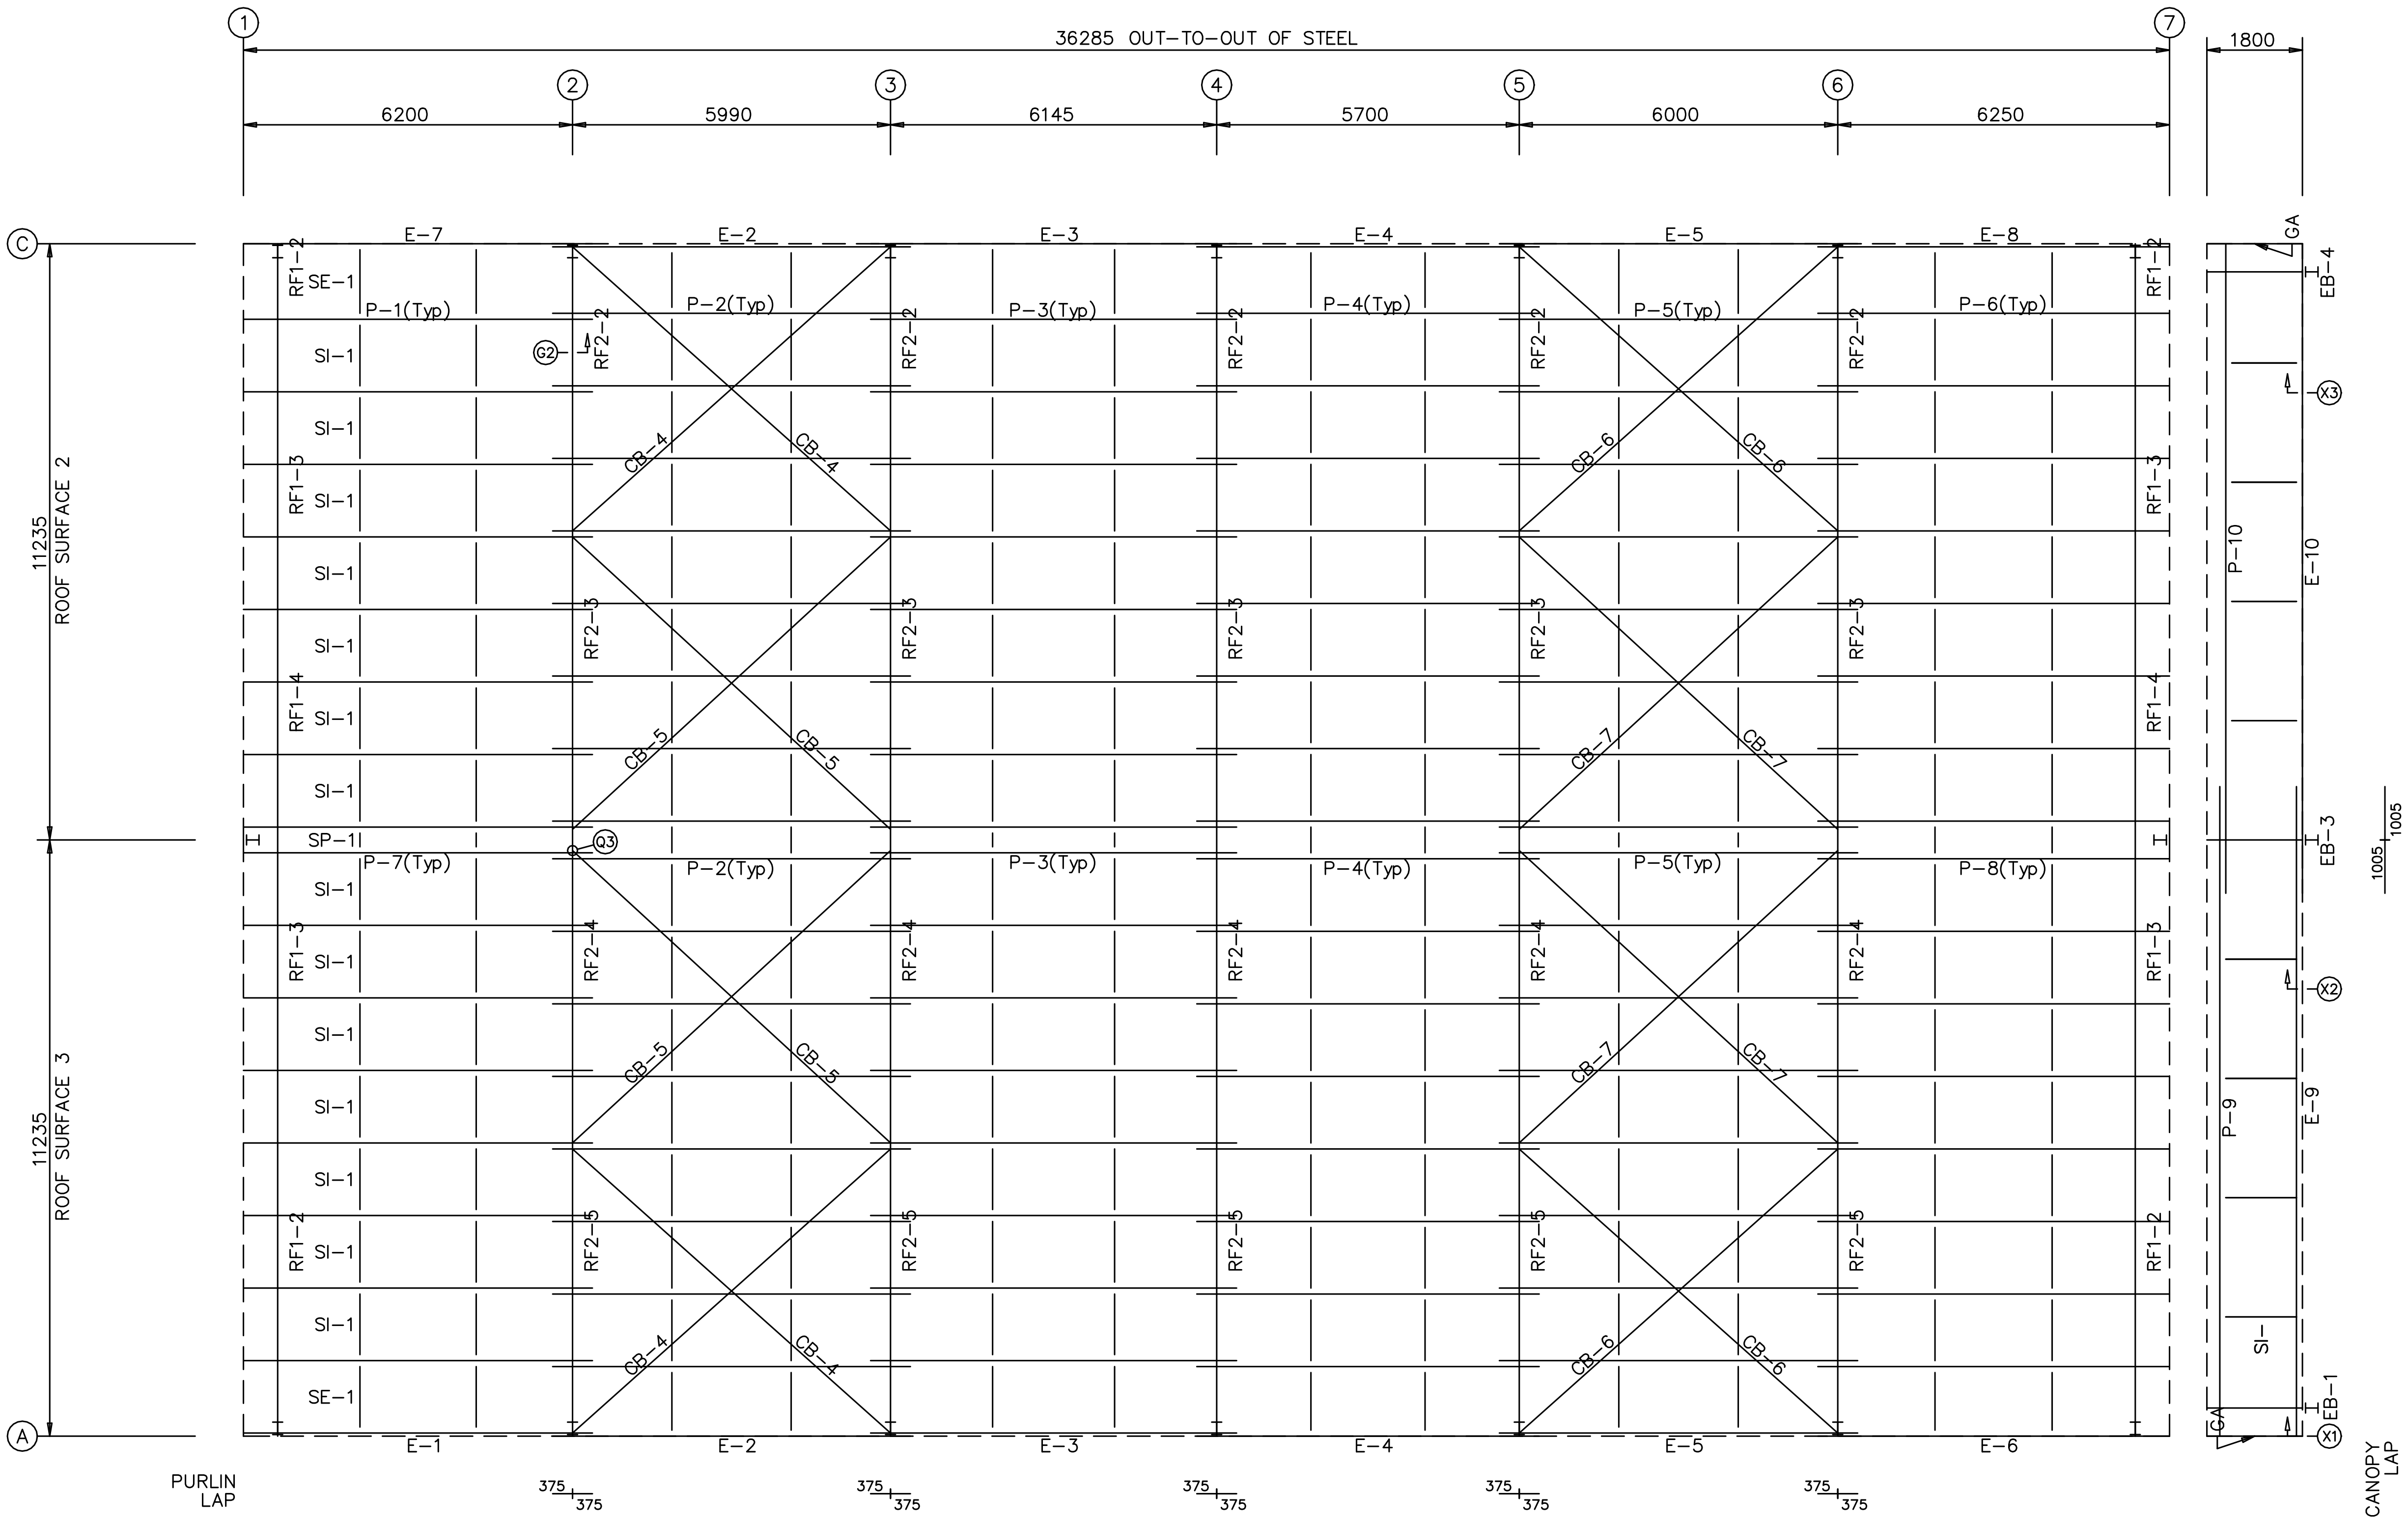

COLUMNS & RAFTERS MARKING PLAN

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	ROOF FRAMING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	PUNE	DATE: 7/AUG/2025		
		C323-153-A06		

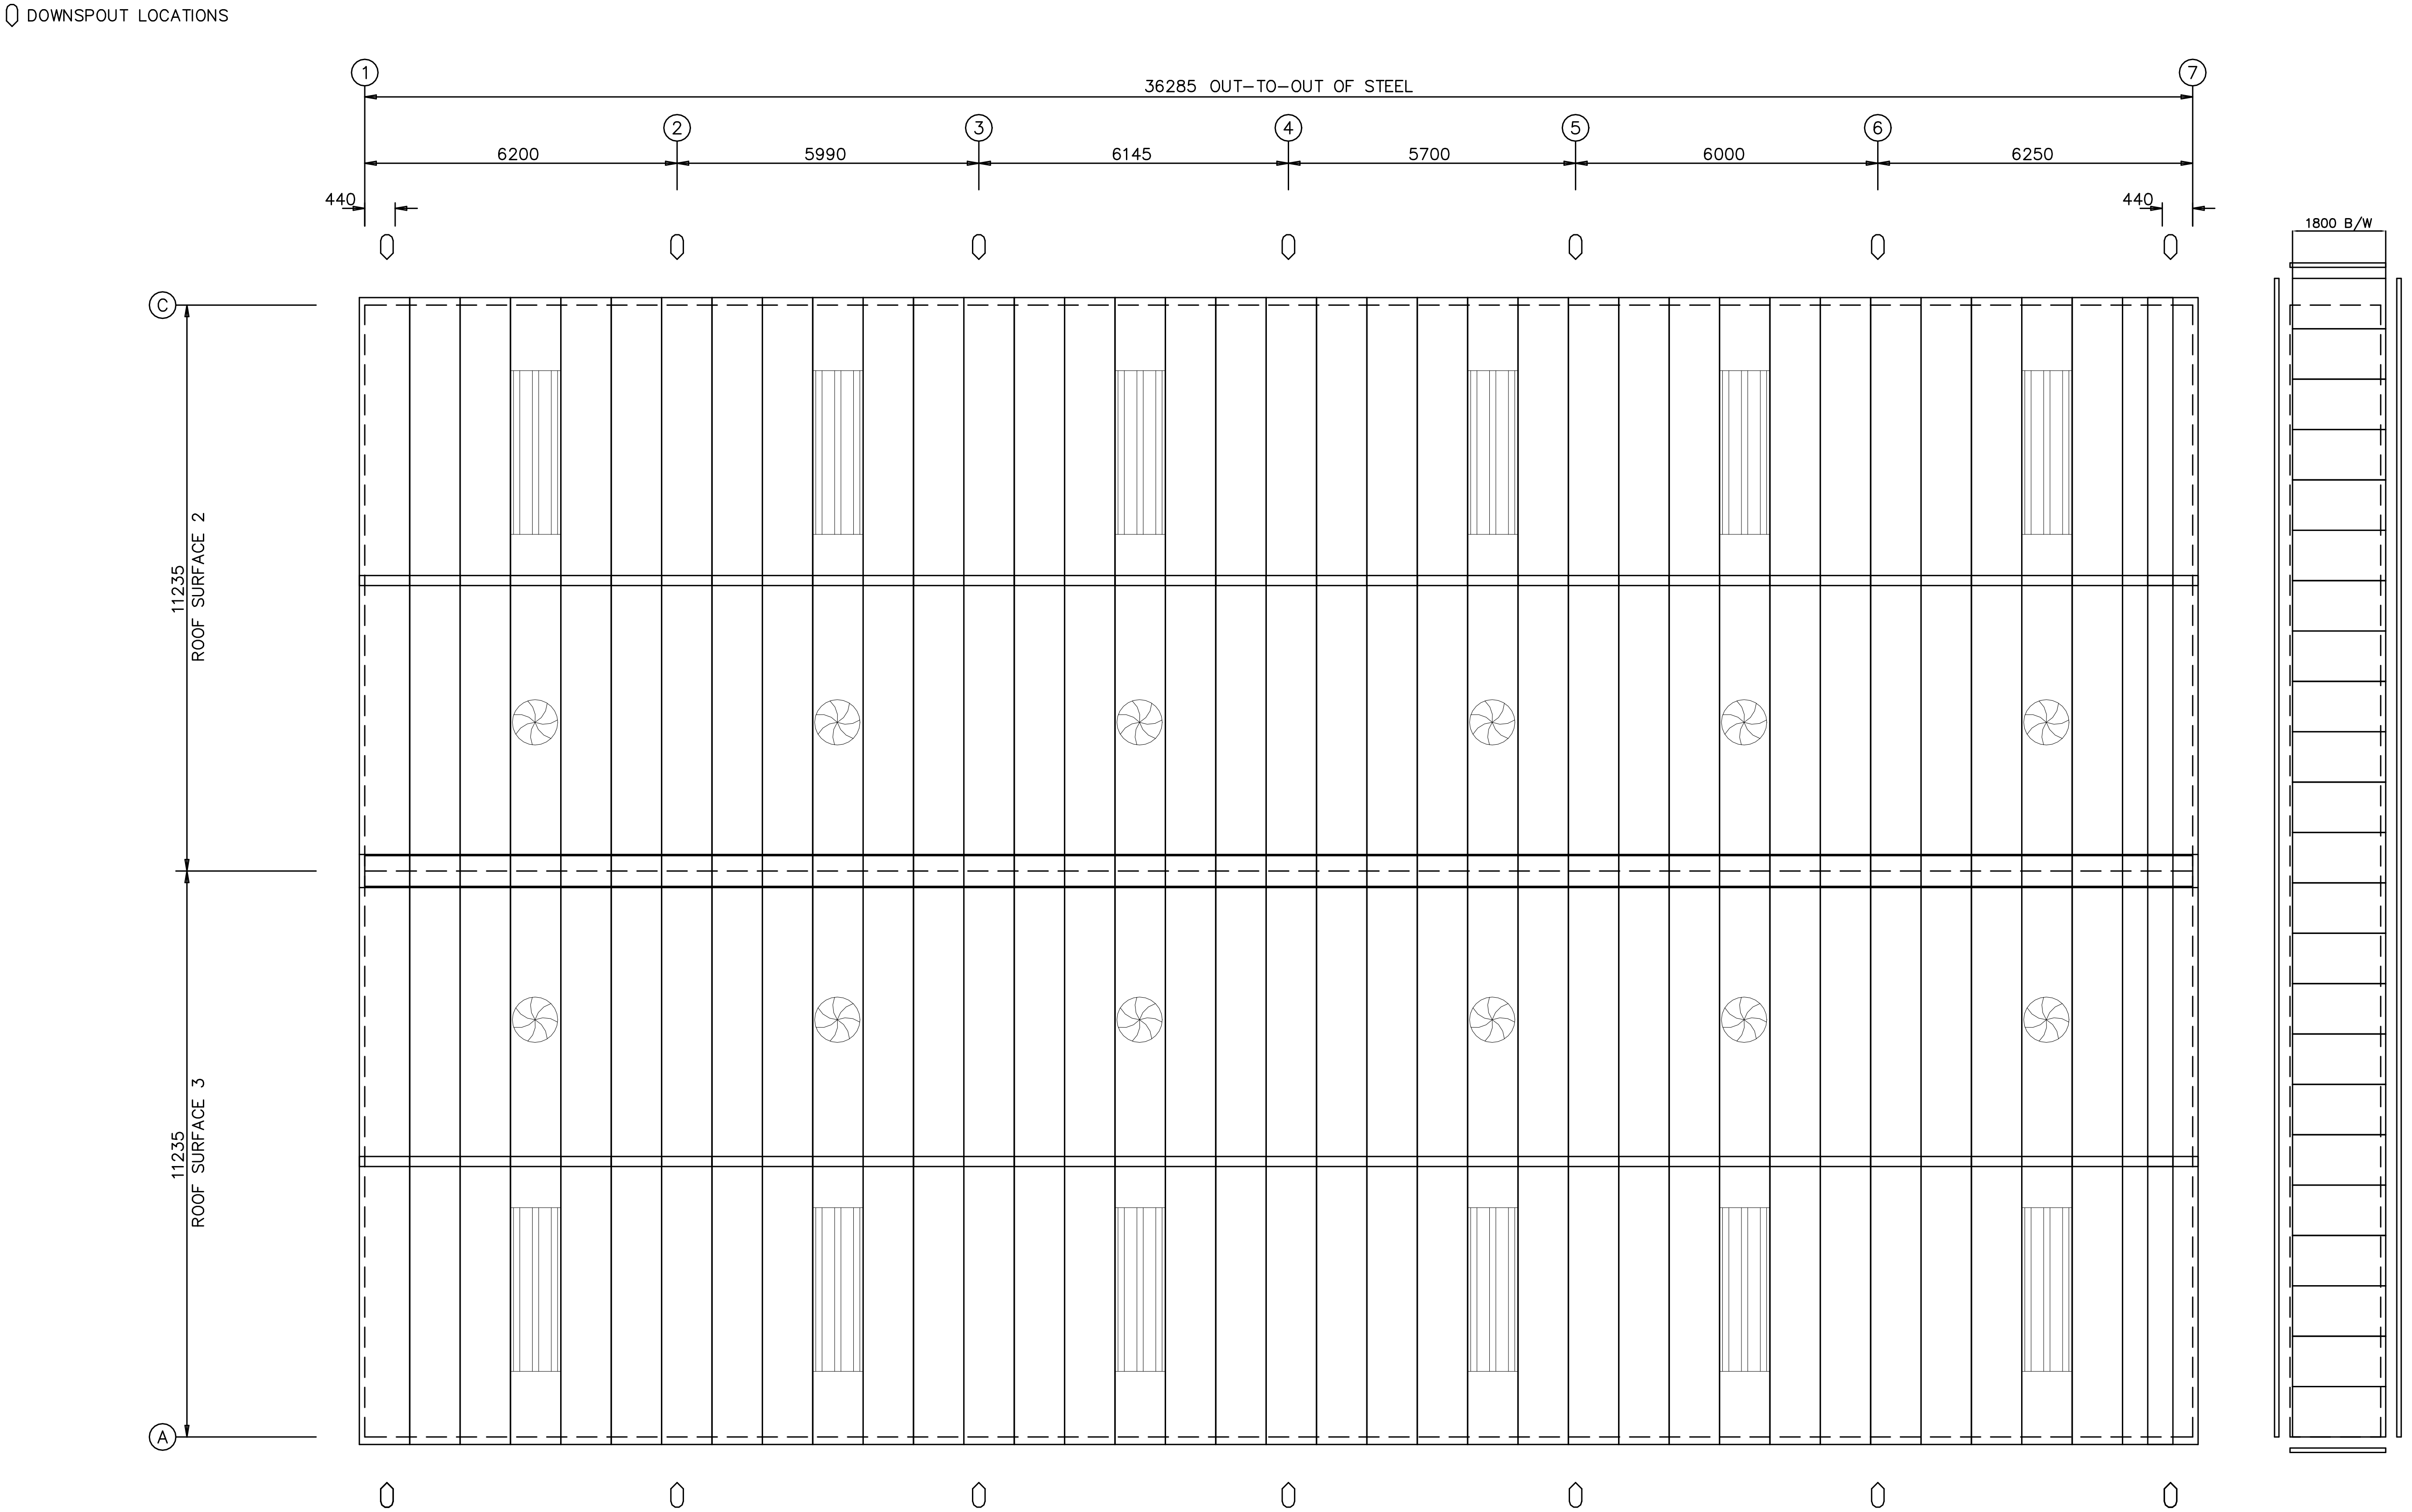

ROOF SHEETING PLAN

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	ROOF SHEETING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	Proposed Warehouse PUNE	DATE: 7/AUG/2025		
		C323-153-A07		

BOLT TABLE FRAME LINE 1 & 7				
LOCATION	QUAN	TYPE	DIA	LENGTH
Columns/Raf	4	Gr8.8	20	90

MEMBER TABLE FRAME LINE 1 & 7		
MARK	PART	LENGTH
EC-1	W40b155	8830
EC-2	W40b155	8830
DJ-1	200C [redacted]	4480
G-1	200Z [redacted]	12030
G-2	200Z [redacted]	12235
G-3	200Z [redacted]	12030
G-4	200Z [redacted]	11132
G-5	200Z [redacted]	12030
G-6	200Z [redacted]	12235
G-7	200Z [redacted]	12030
G-8	200Z [redacted]	11132
G-9	200Z [redacted]	3066
G-10	200Z [redacted]	3271
G-11	200Z [redacted]	12235
G-12	200Z [redacted]	12235
G-13	200Z [redacted]	4280
G-14	200Z [redacted]	4280
G-15	200Z [redacted]	12235
G-6	200Z [redacted]	12235
JB-1	SROD [redacted]	1100
JB-2	SROD [redacted]	900
JB-4	SROD [redacted]	270
JB-5	SROD [redacted]	930

FLANGE BRACE TABLE FRAME LINE 1 & 7		
▽ID	MARK	LENGTH
1	FB568	568

CONNECTION PLATES FRAME LINE 1 & 7	
□ID	MARK/PART
1	d2
2	d1
3	f1
4	j1
5	b1

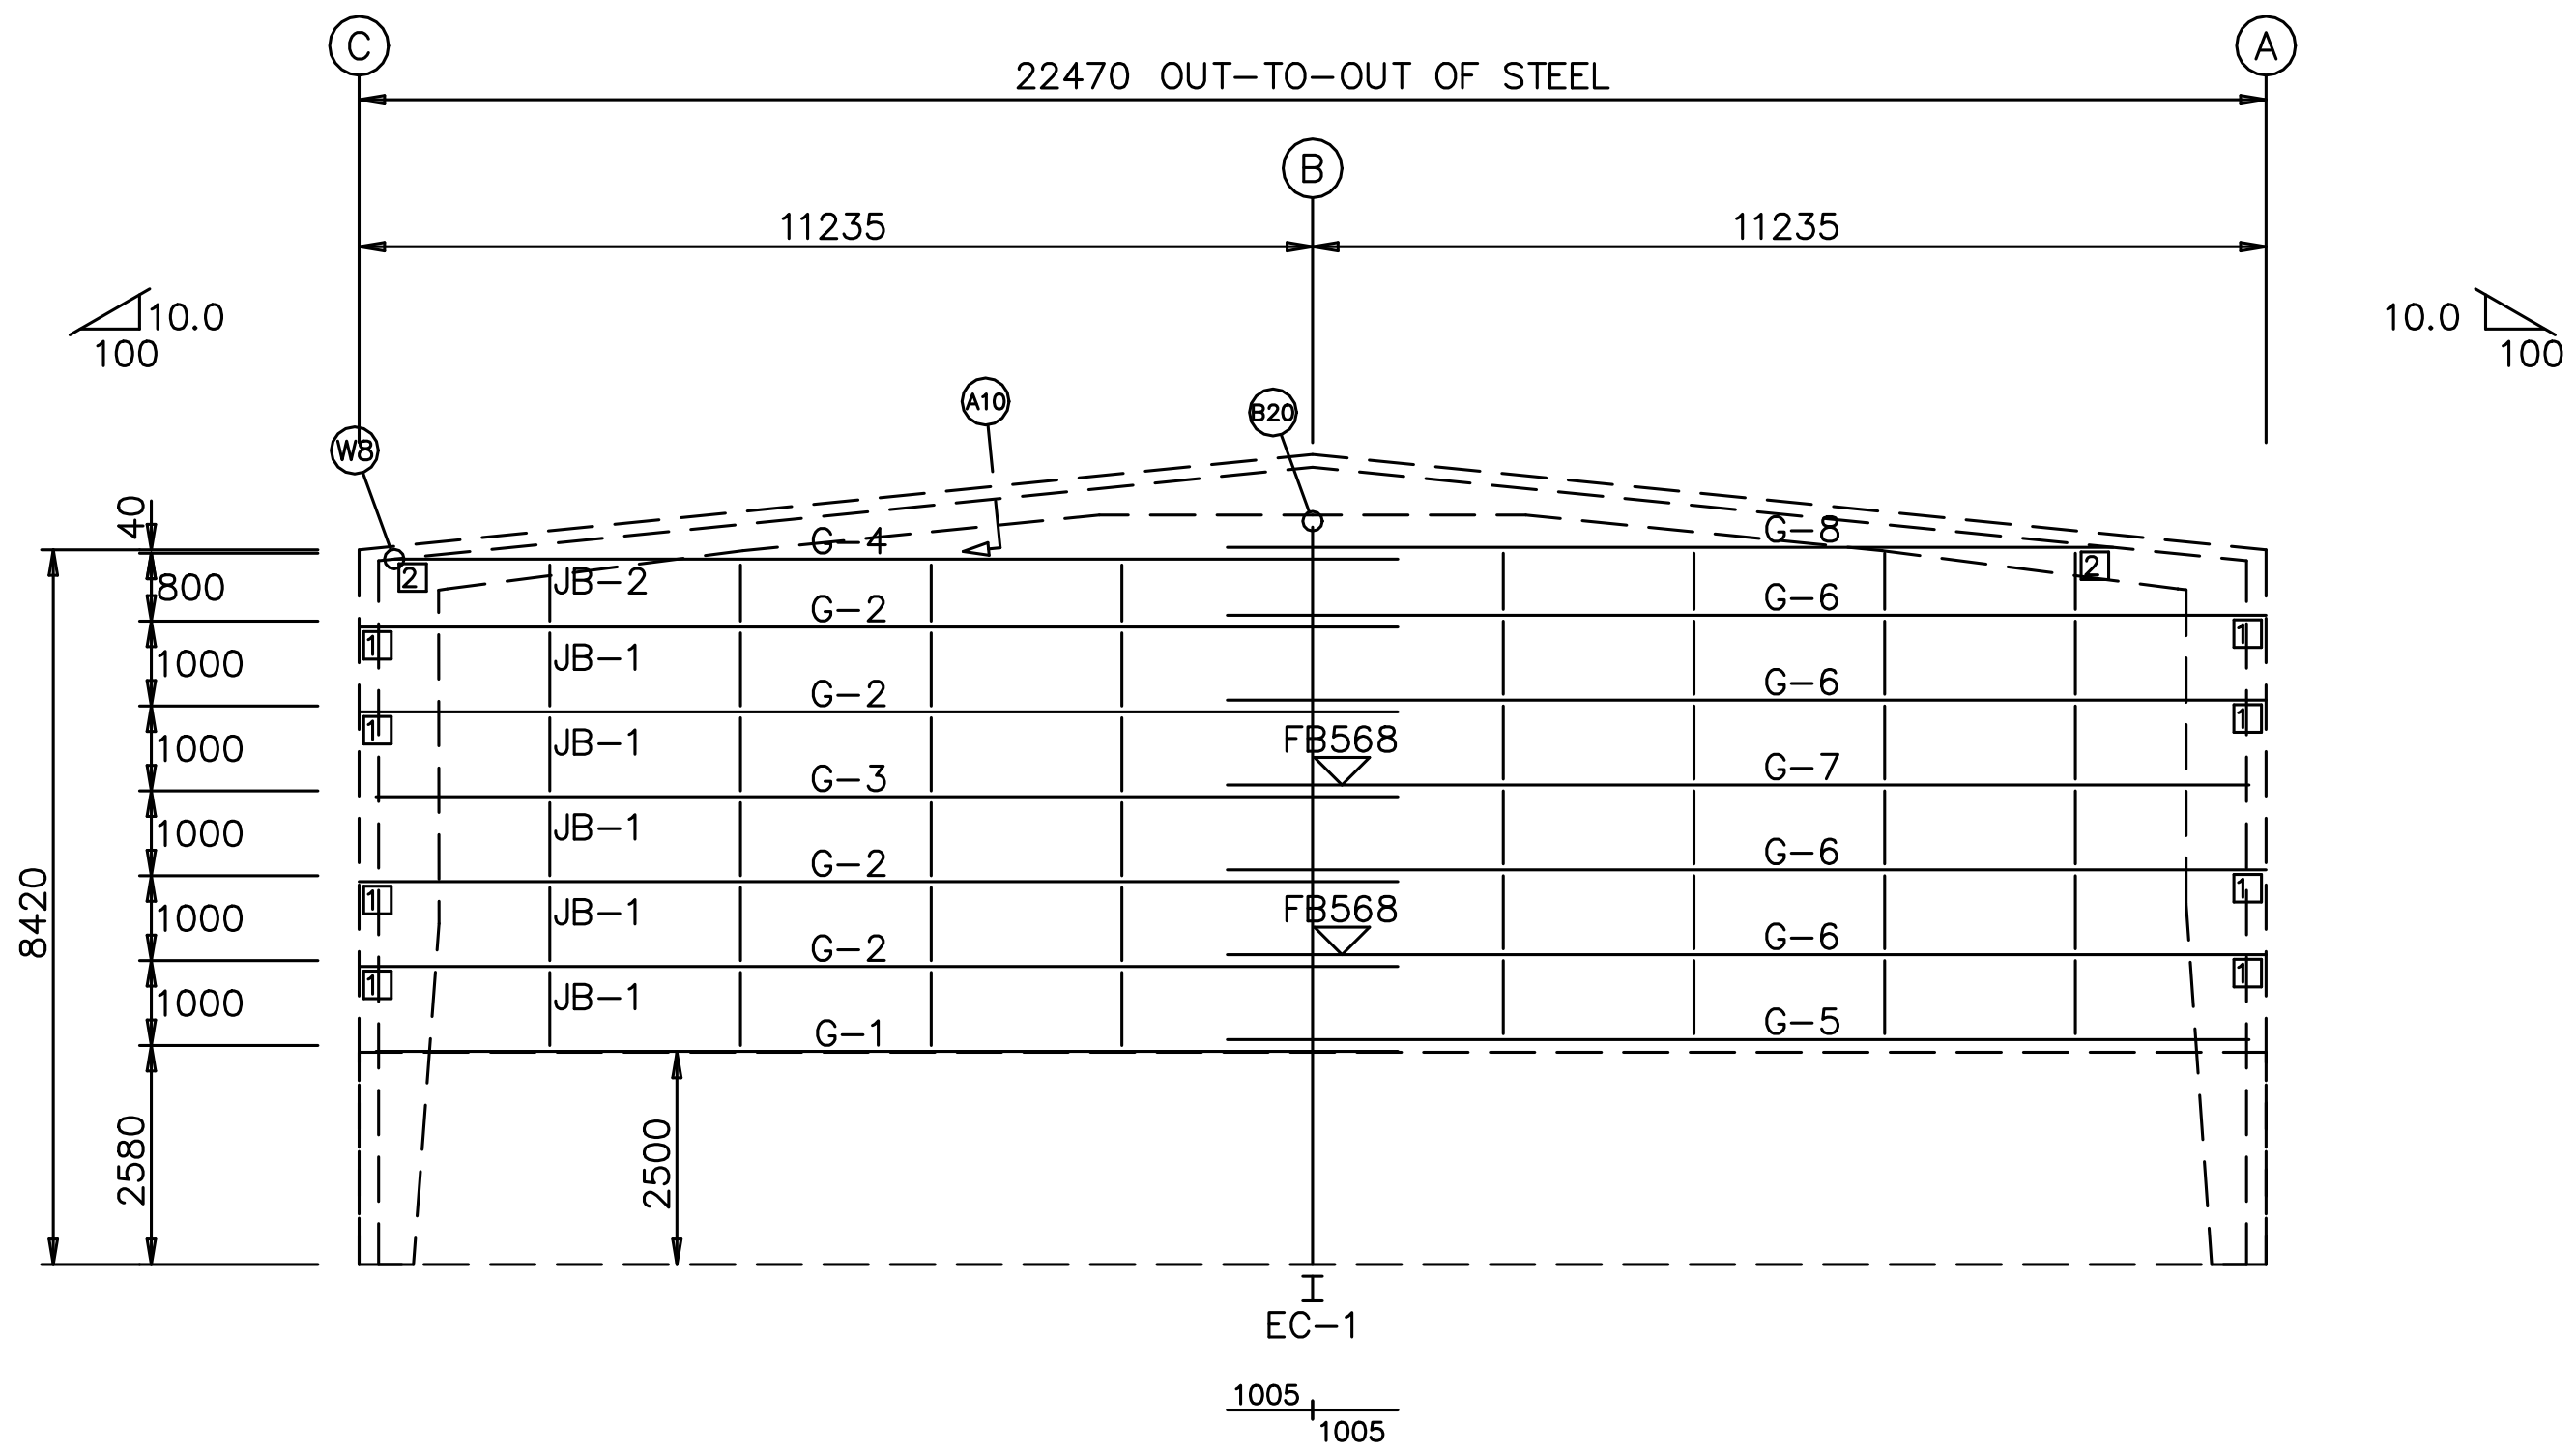

ENDWALL FRAMING: FRAME LINE 1

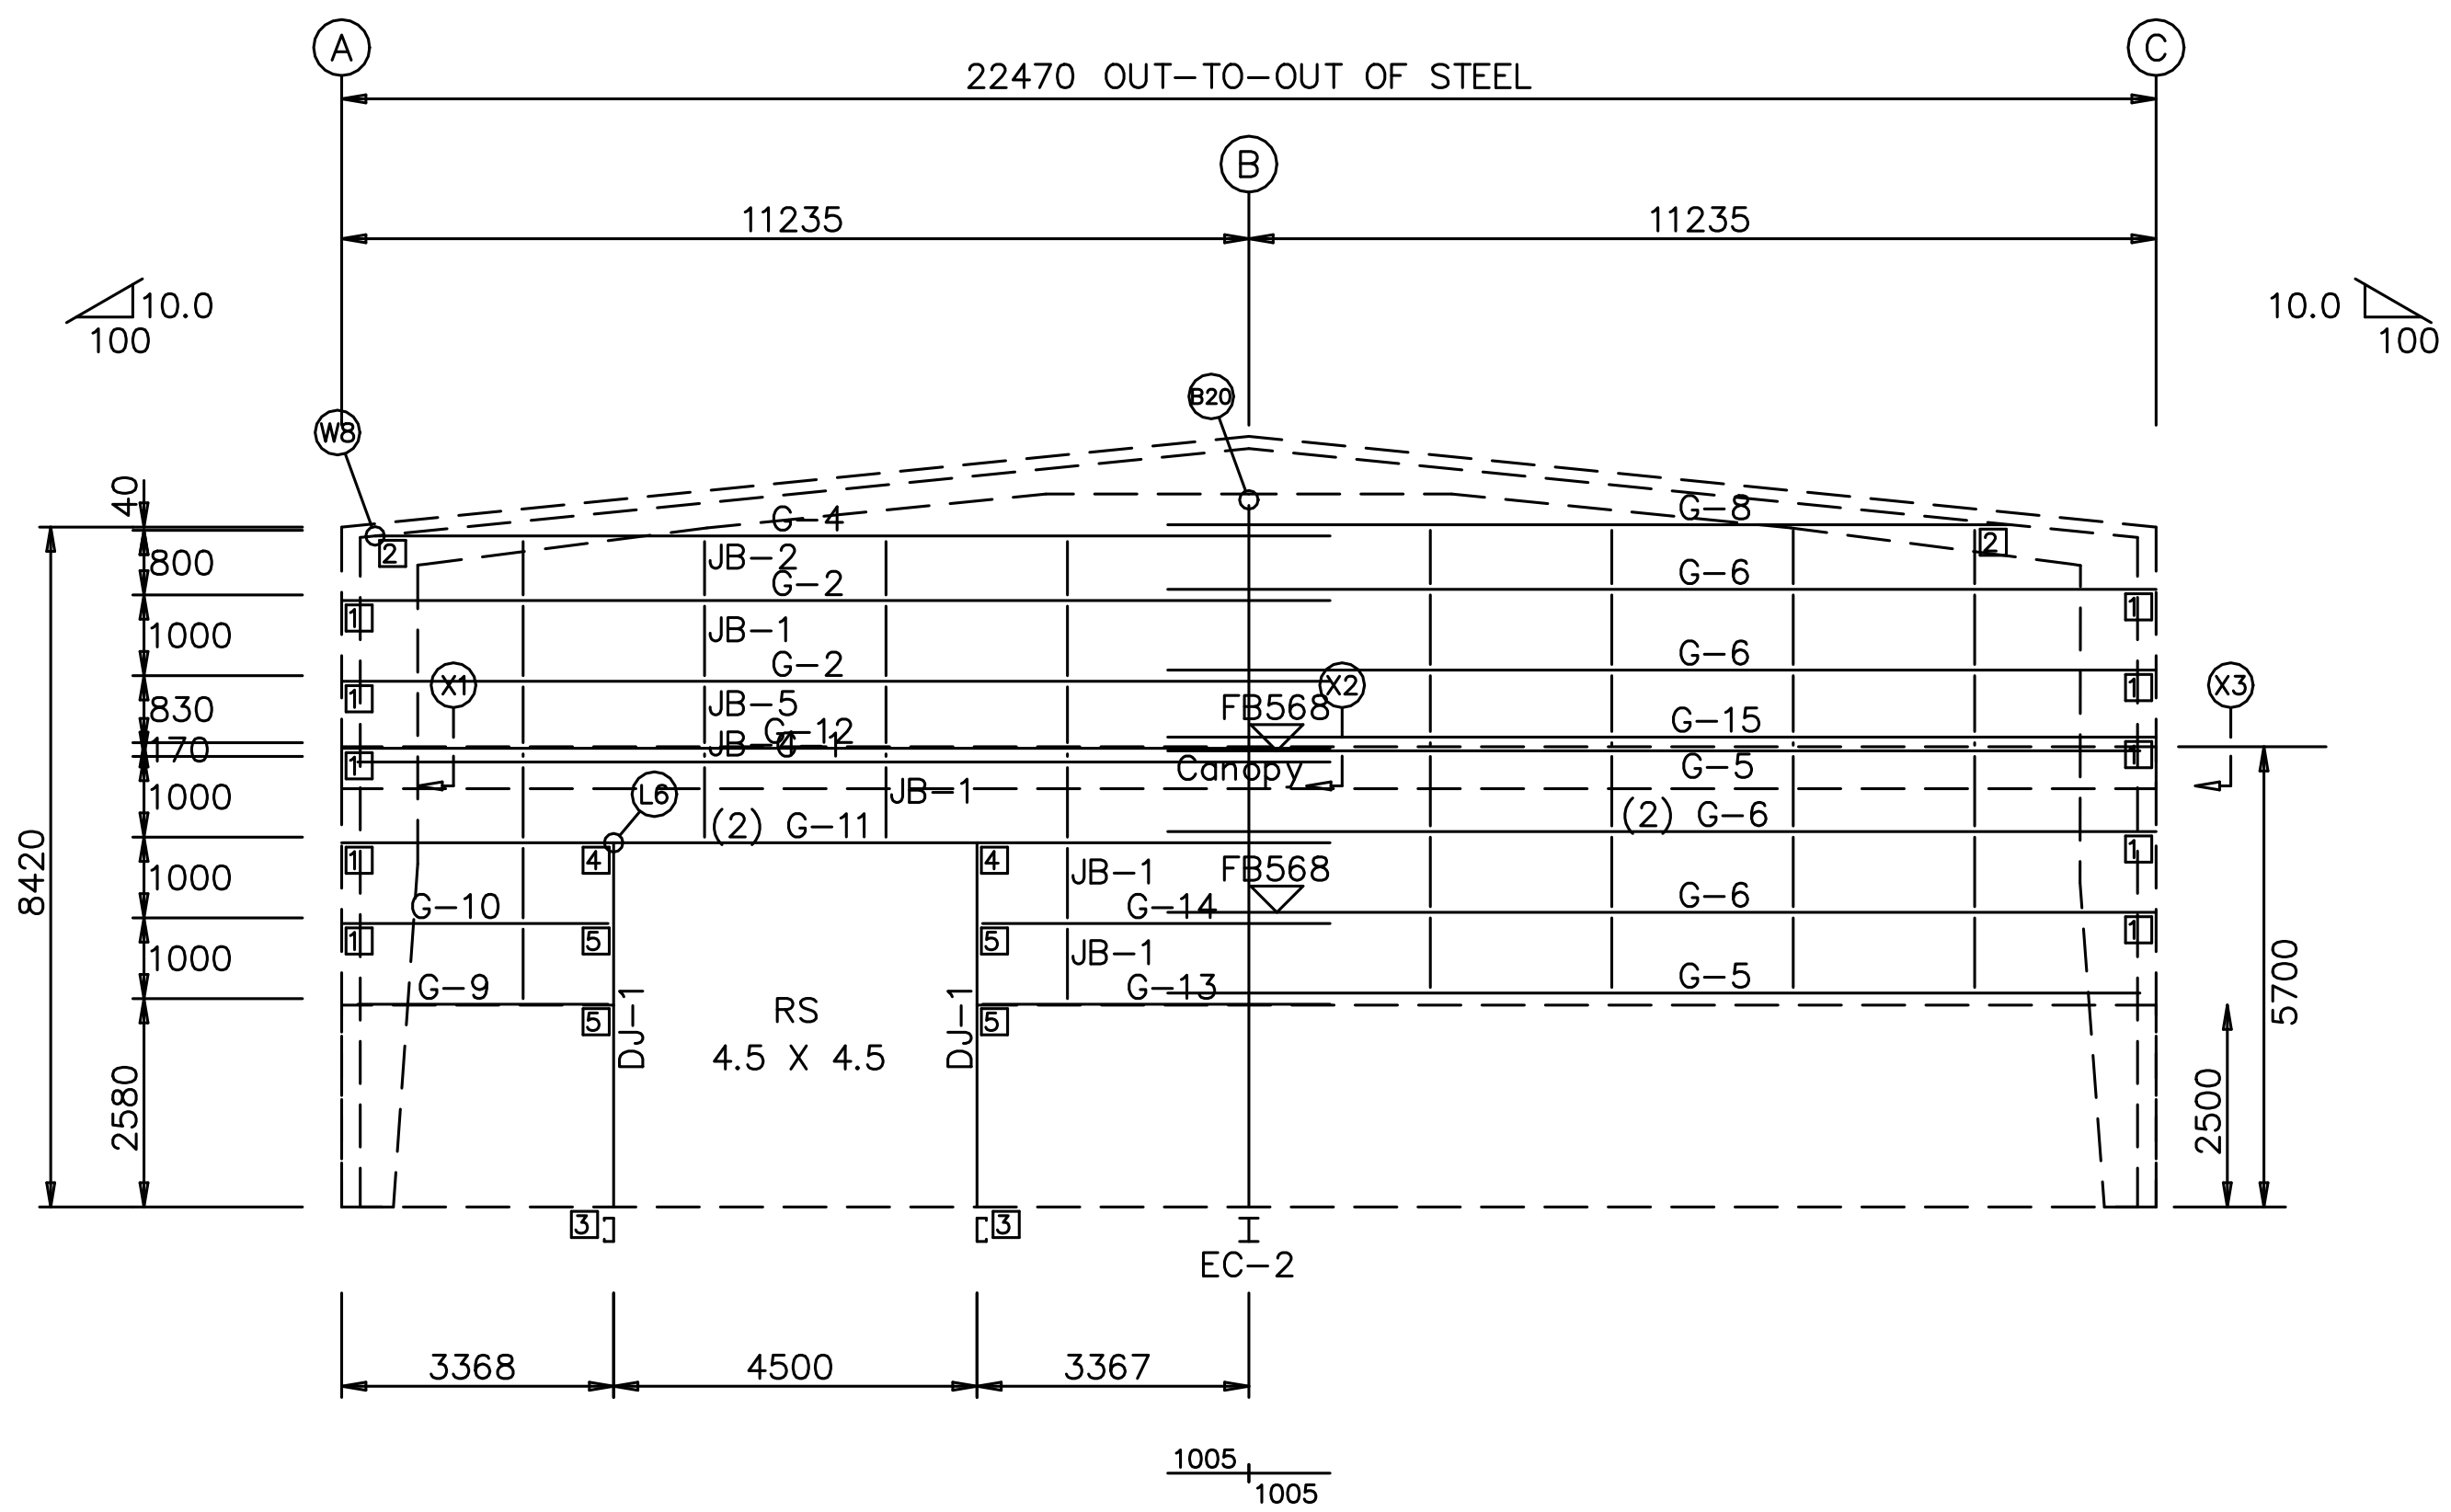

ENDWALL FRAMING: FRAME LINE 7

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Proposed Warehouse	ENDWALL FRAMING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: SSP
PROJECT ADDRESS	Proposed Warehouse PINE	DATE: 7/AUG/2025 C323-153-A09		

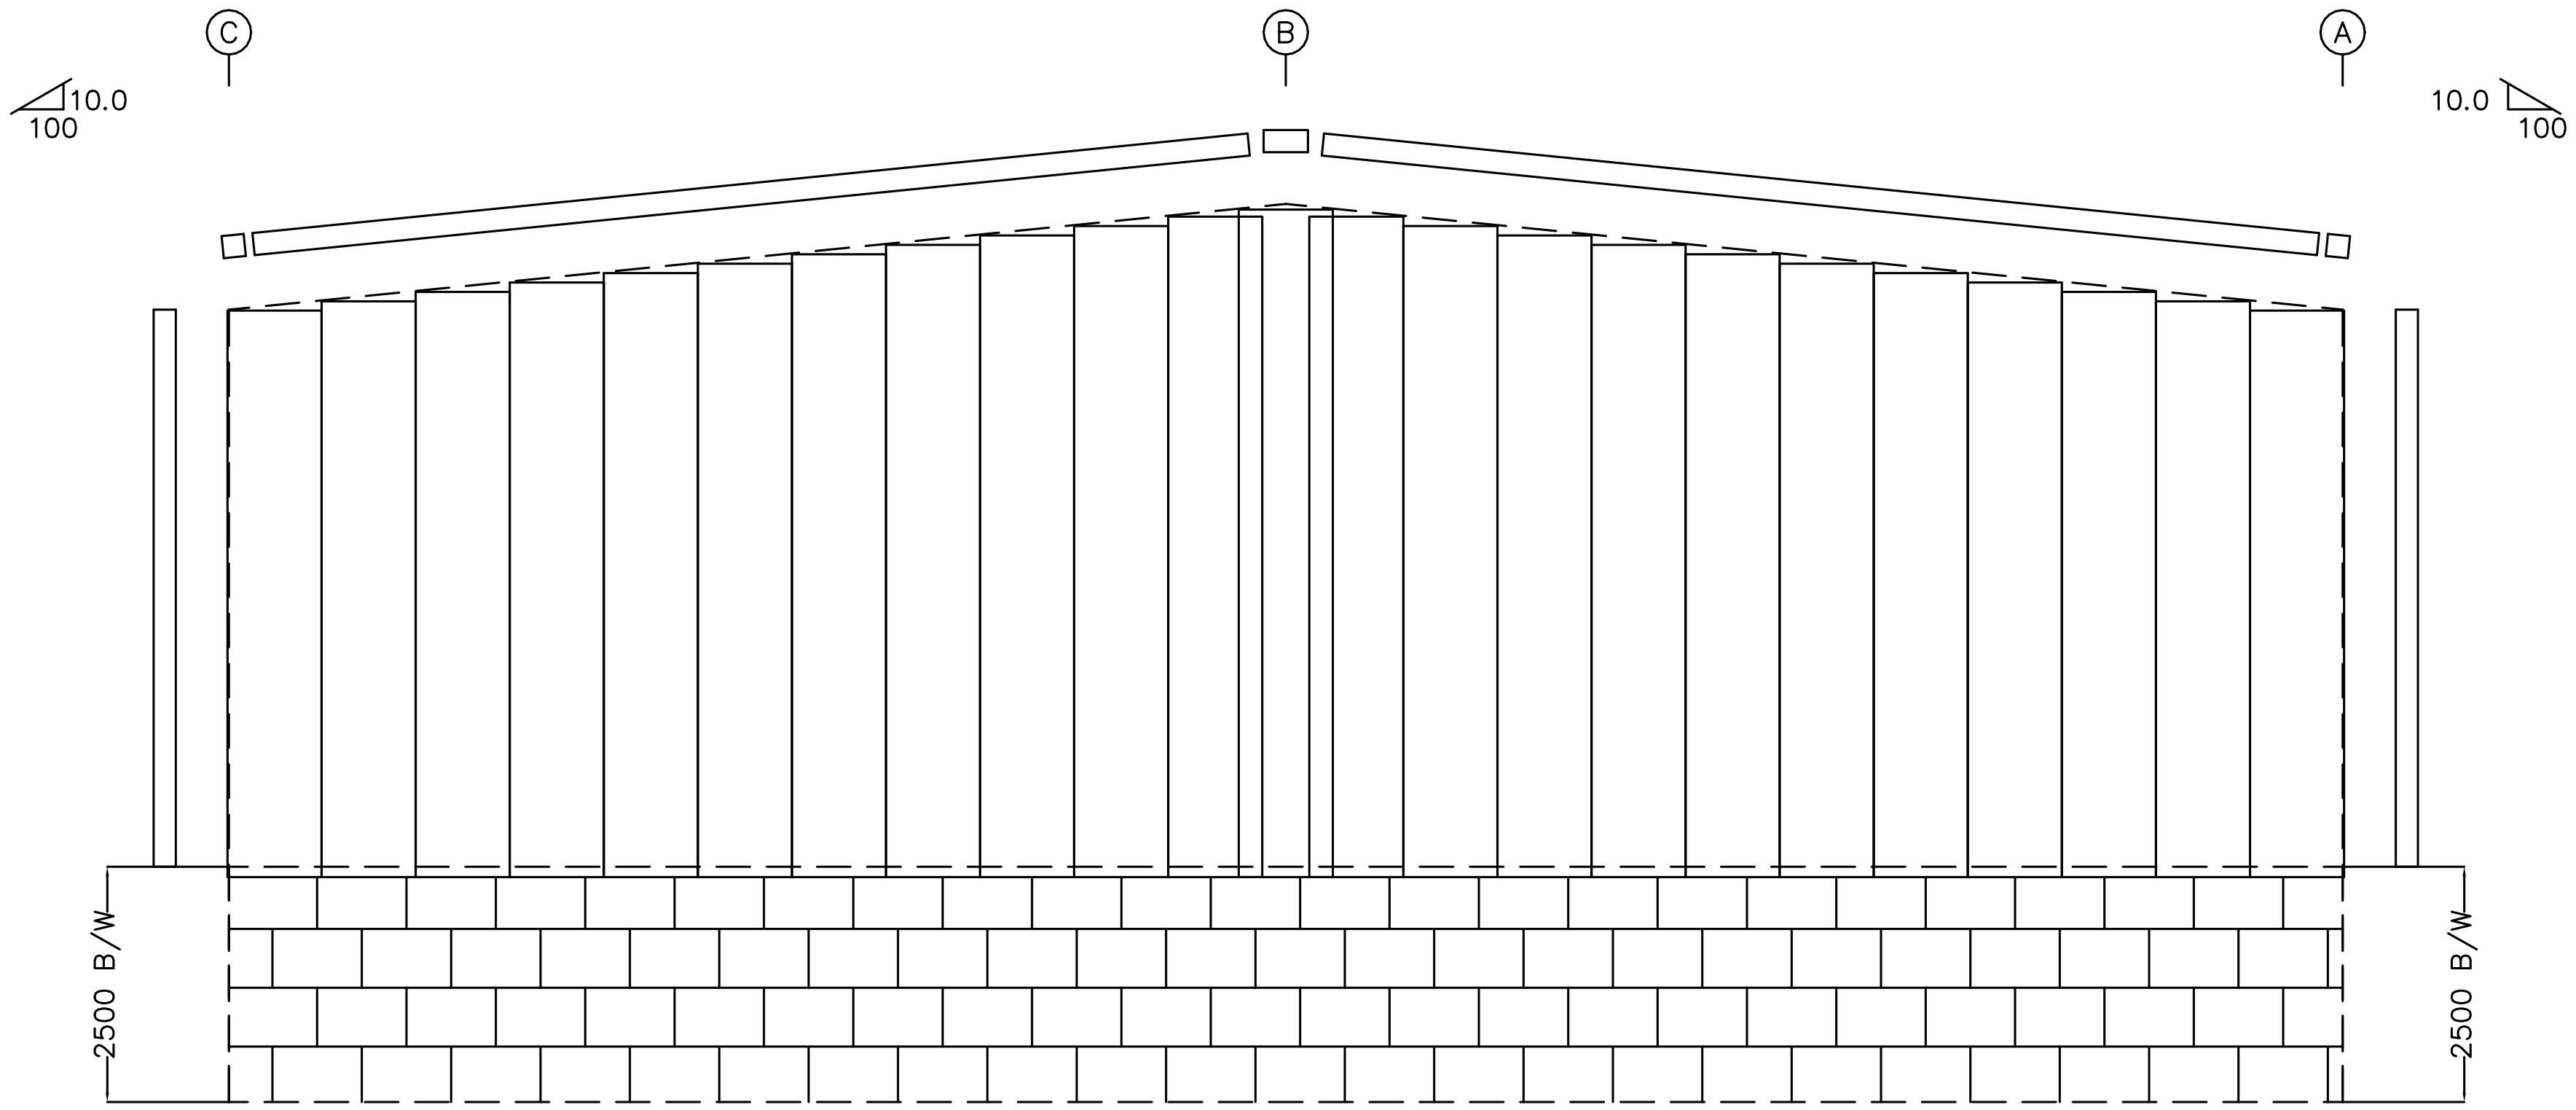

ENDWALL SHEETING & TRIM: FRAME LINE 1

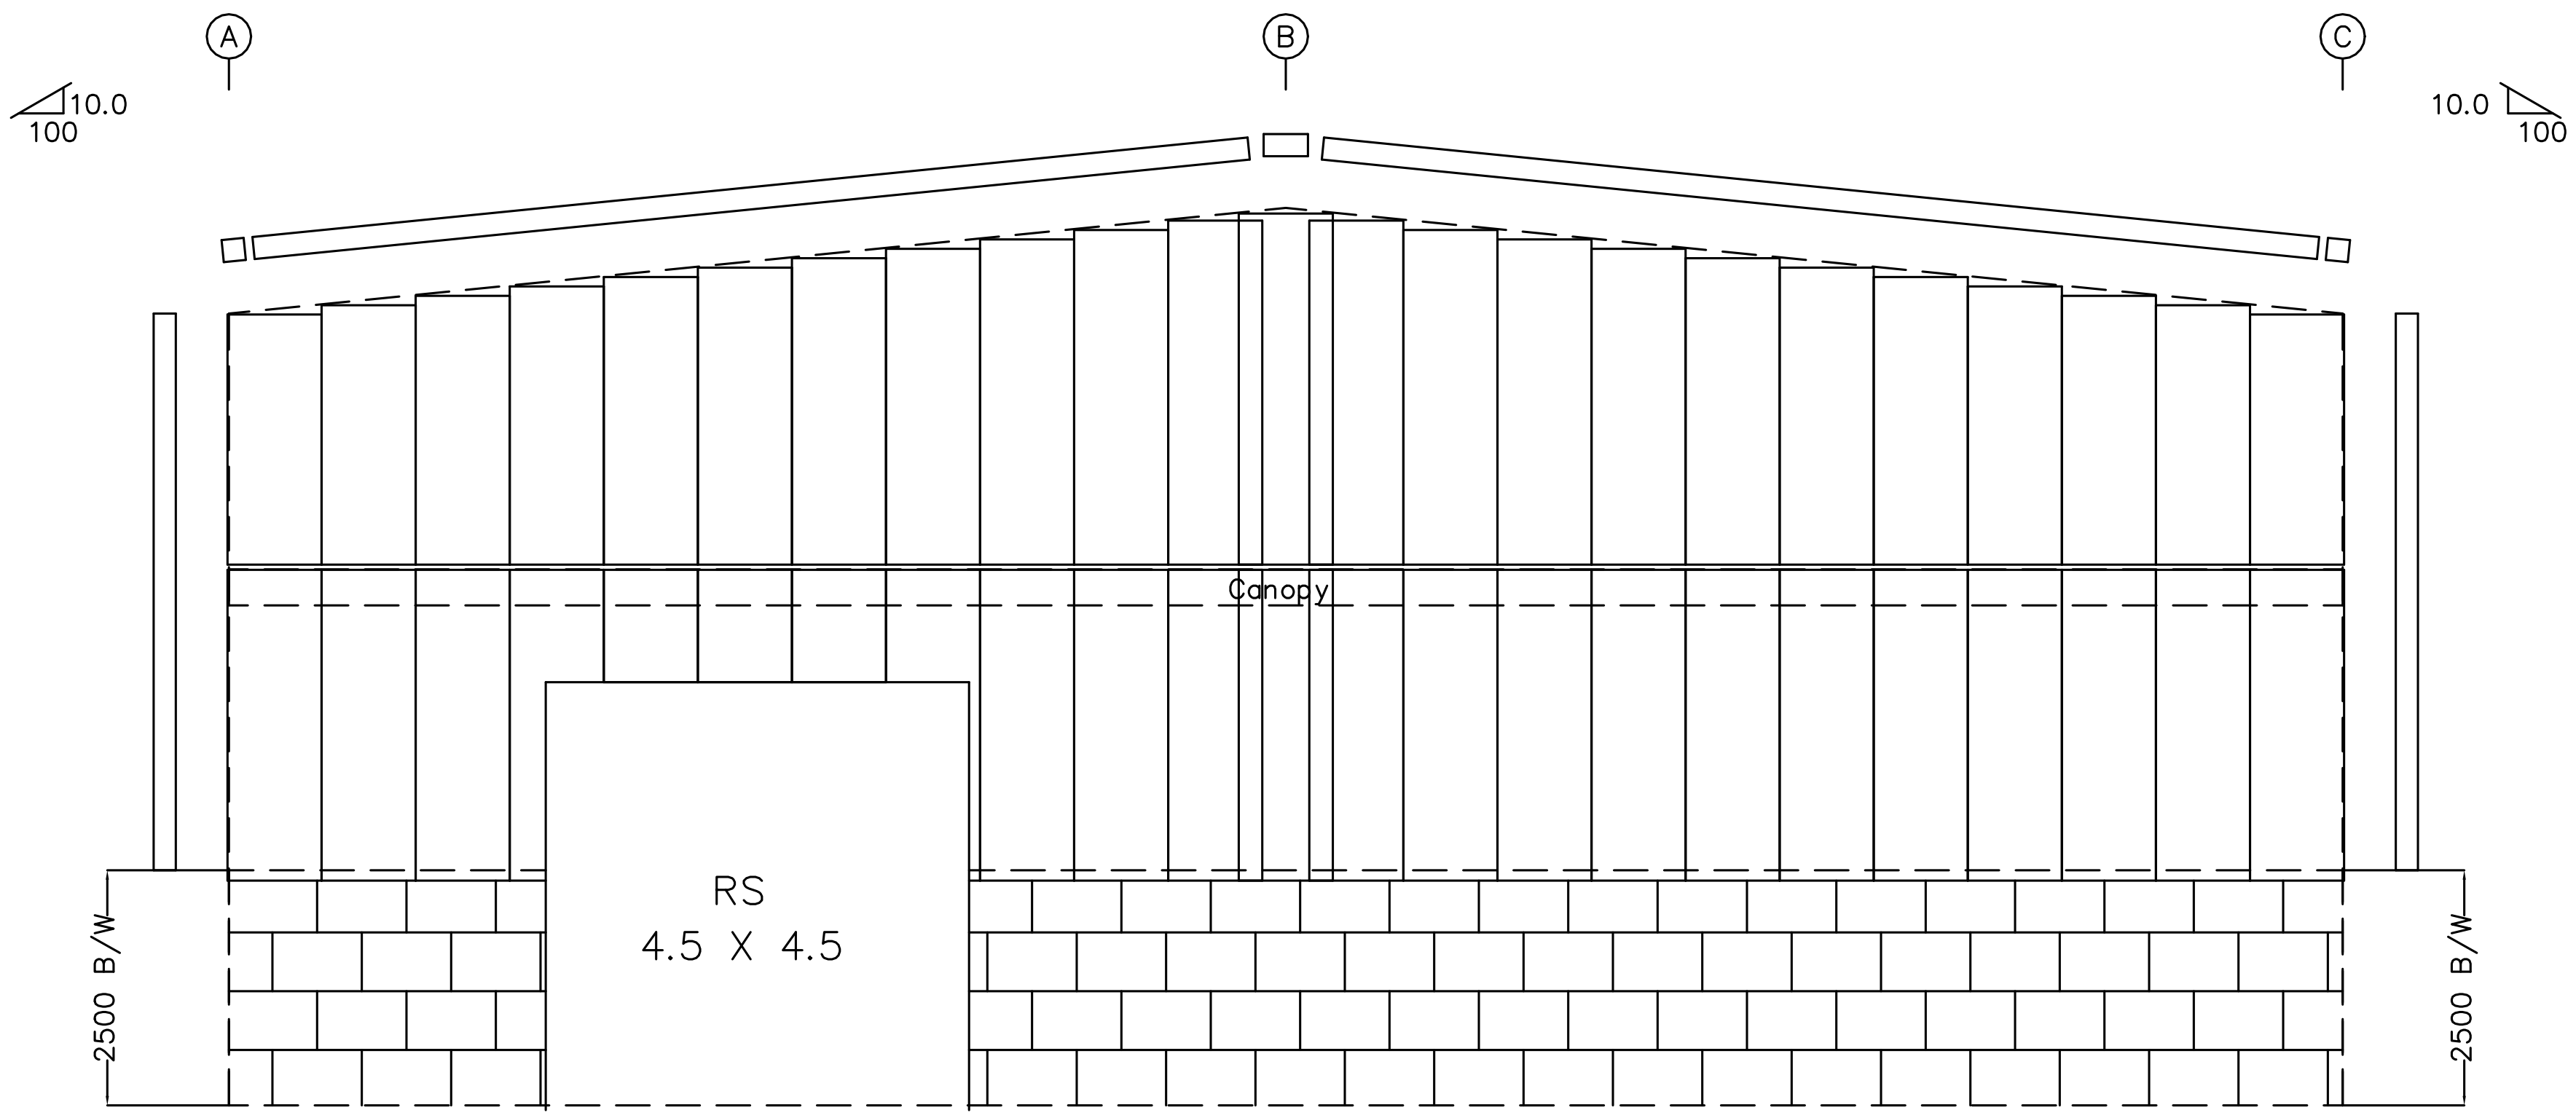

ENDWALL SHEETING & TRIM: FRAME LINE 7

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	ENDWALL FRAMING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	Warehouse PUNE	DATE: 7/AUG/2025		
		C323-153-A010		

DOWNSPOUT LOCATIONS

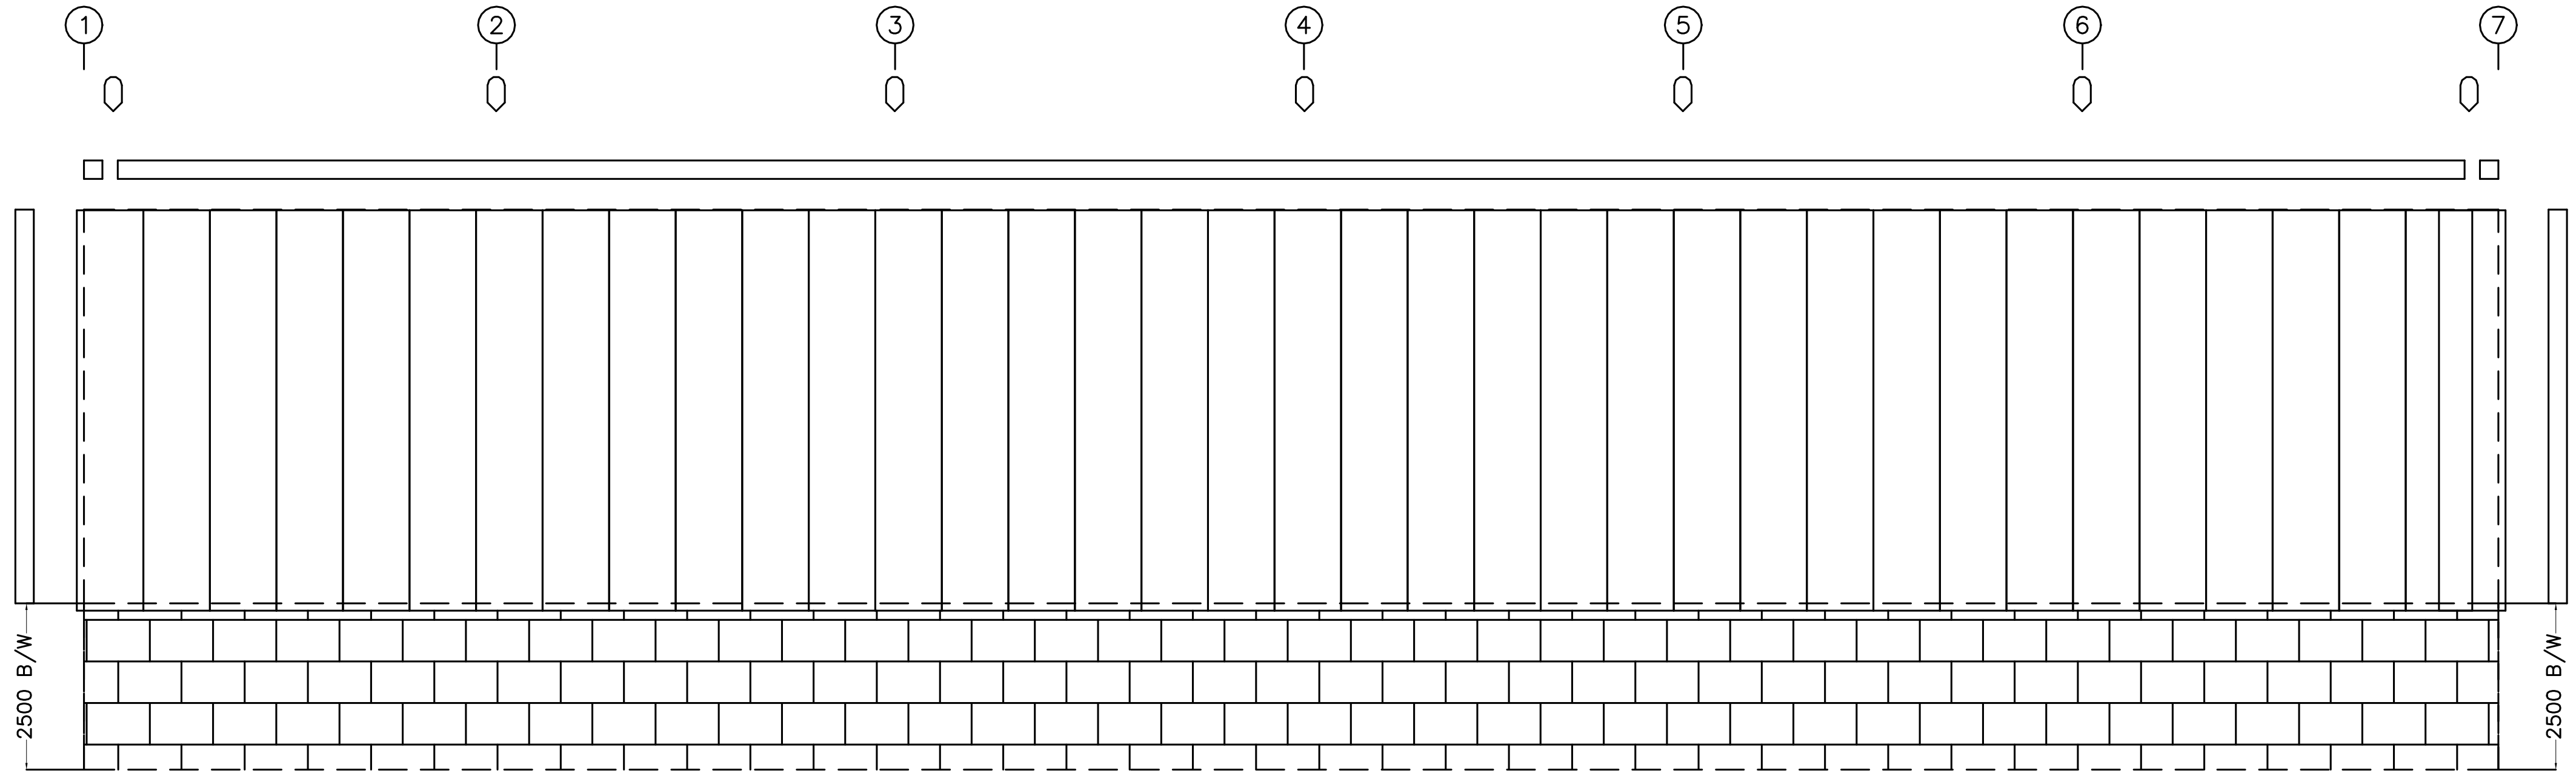

SIDEWALL SHEETING & TRIM: FRAME LINE A

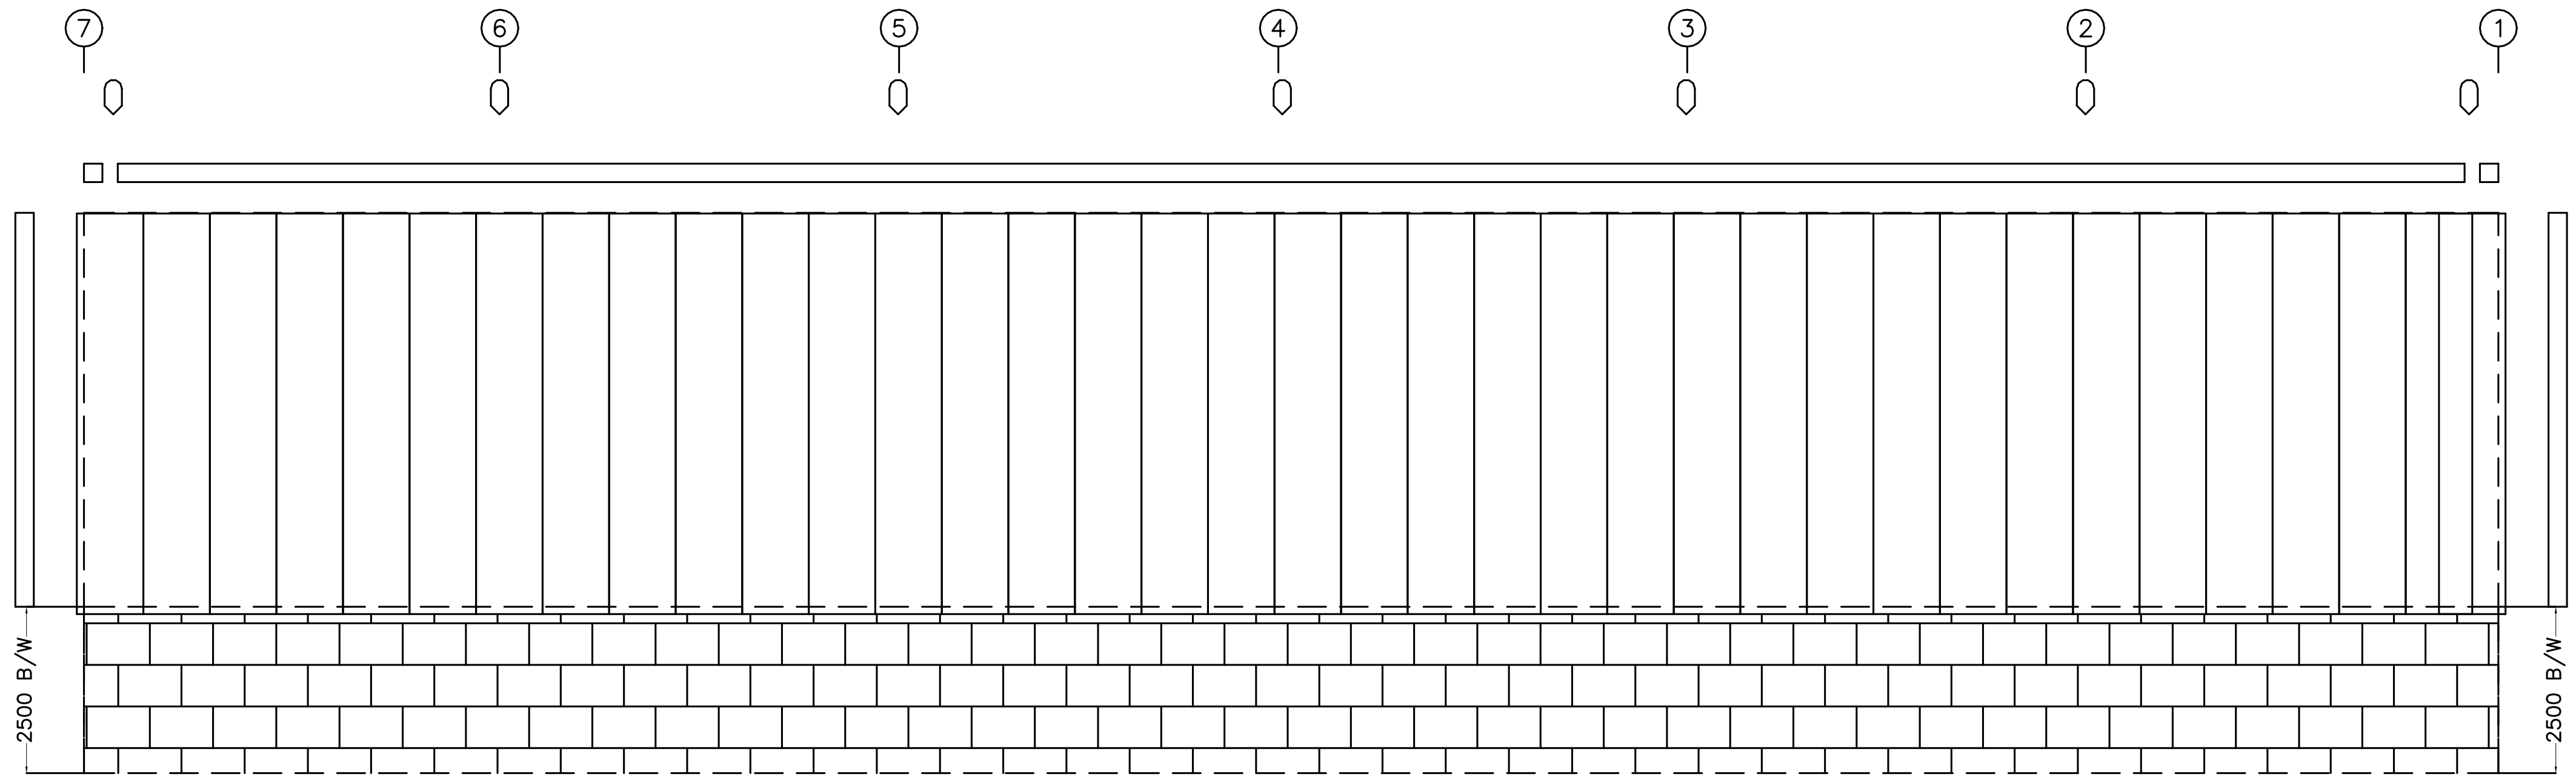

SIDEWALL SHEETING & TRIM: FRAME LINE C

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	SIDEWALL FRAMING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	Warehouse PUNE	DATE: 7/AUG/2025		
		C323-153-A011		

MEMBER TABLE FRAME LINE A & C		
MARK	PART	LENGTH
EB-1	BEAM	2272
EB-2	W30a155	5805
EB-4	BEAM	2272
G-16	200Z [redacted]	6570
G-17	200Z [redacted]	6740
G-18	200Z [redacted]	6895
G-19	200Z [redacted]	6450
G-20	200Z [redacted]	6750
G-21	200Z [redacted]	6620
G-22	200Z [redacted]	6620
G-23	200Z [redacted]	6570
G-24	200Z [redacted]	6180
G-25	200Z [redacted]	6190
CB-1	ROD [redacted]	8220
CB-2	ROD [redacted]	6270
CB-3	ROD [redacted]	8230
JB-3	SROD [redacted]	1600
JB-6	SROD [redacted]	1290
WA	Z200 [redacted]	200

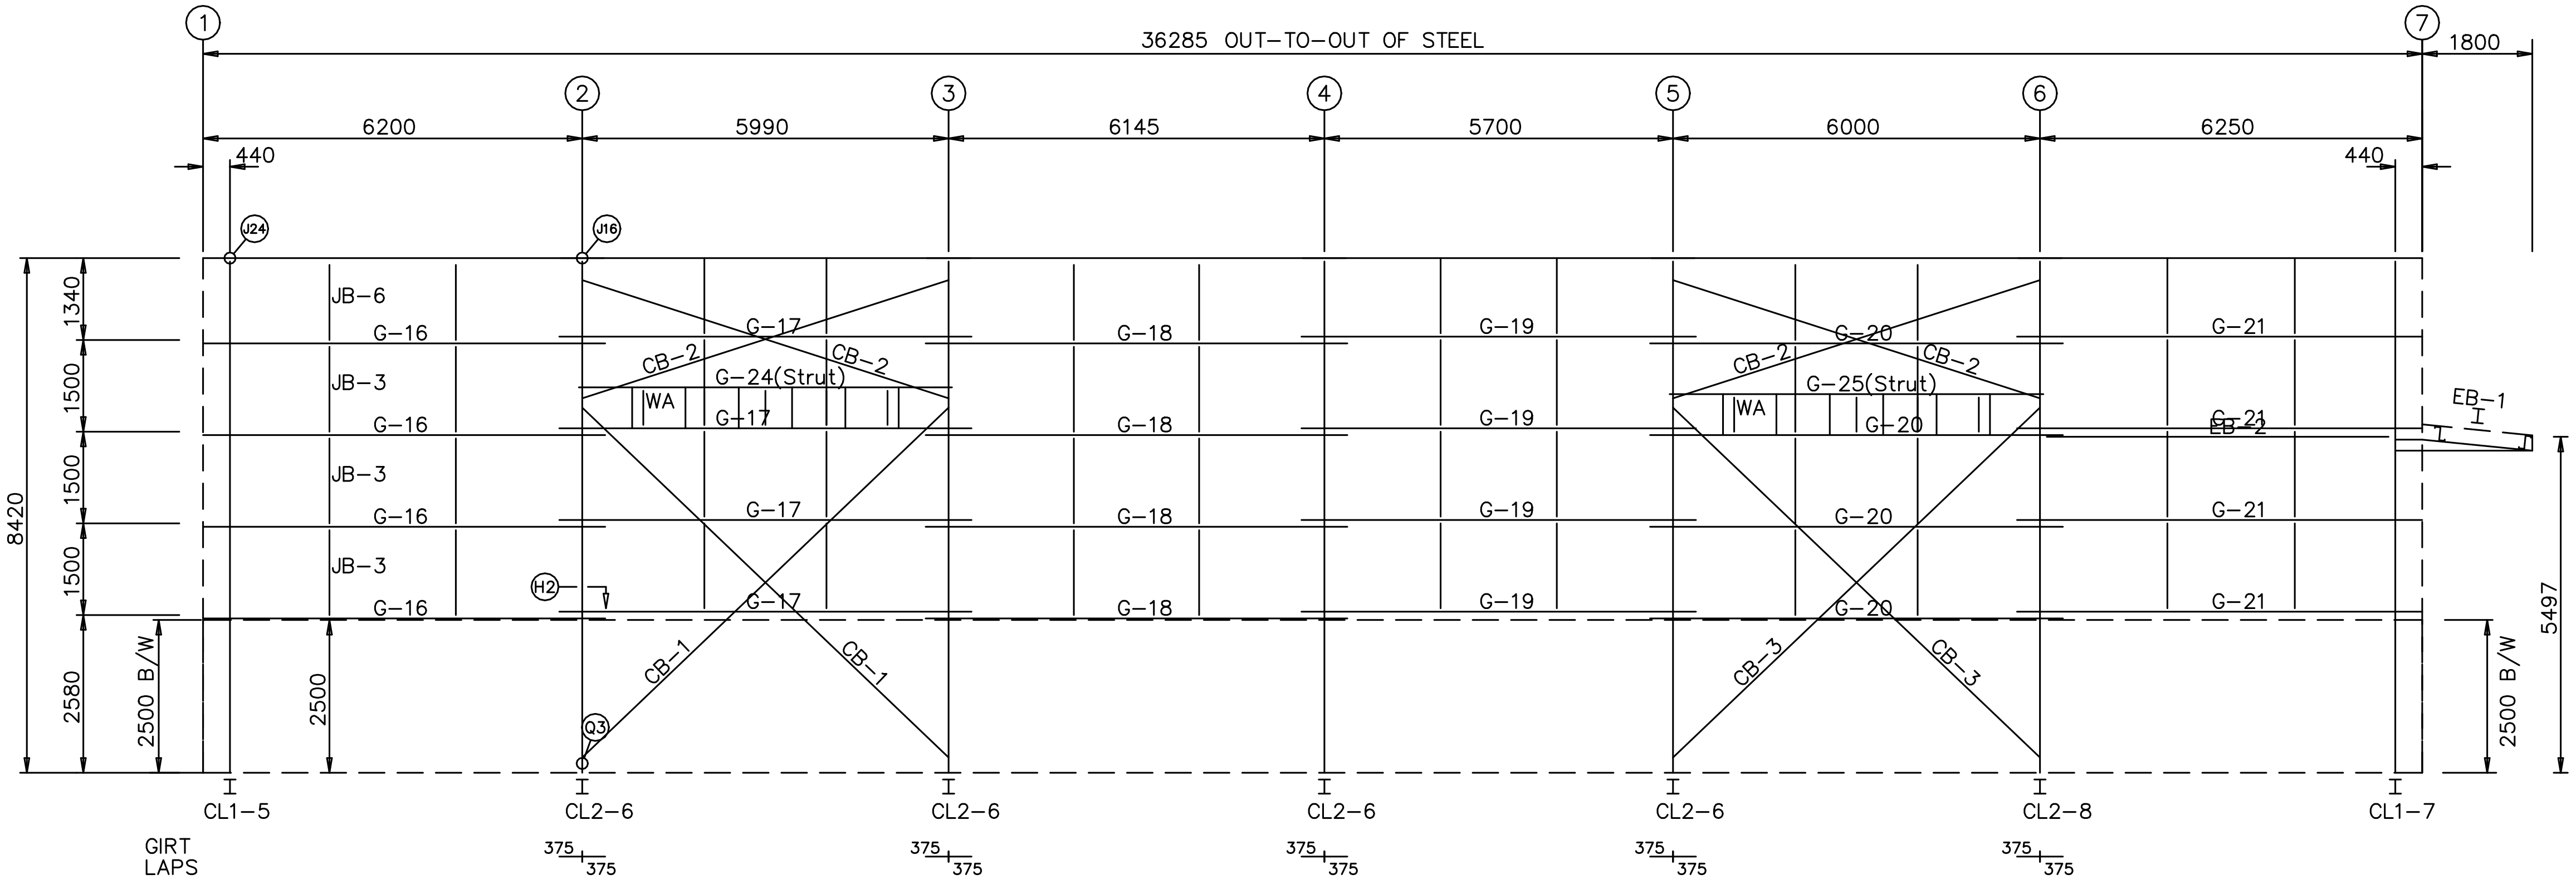

SIDEWALL FRAMING: FRAME LINE A

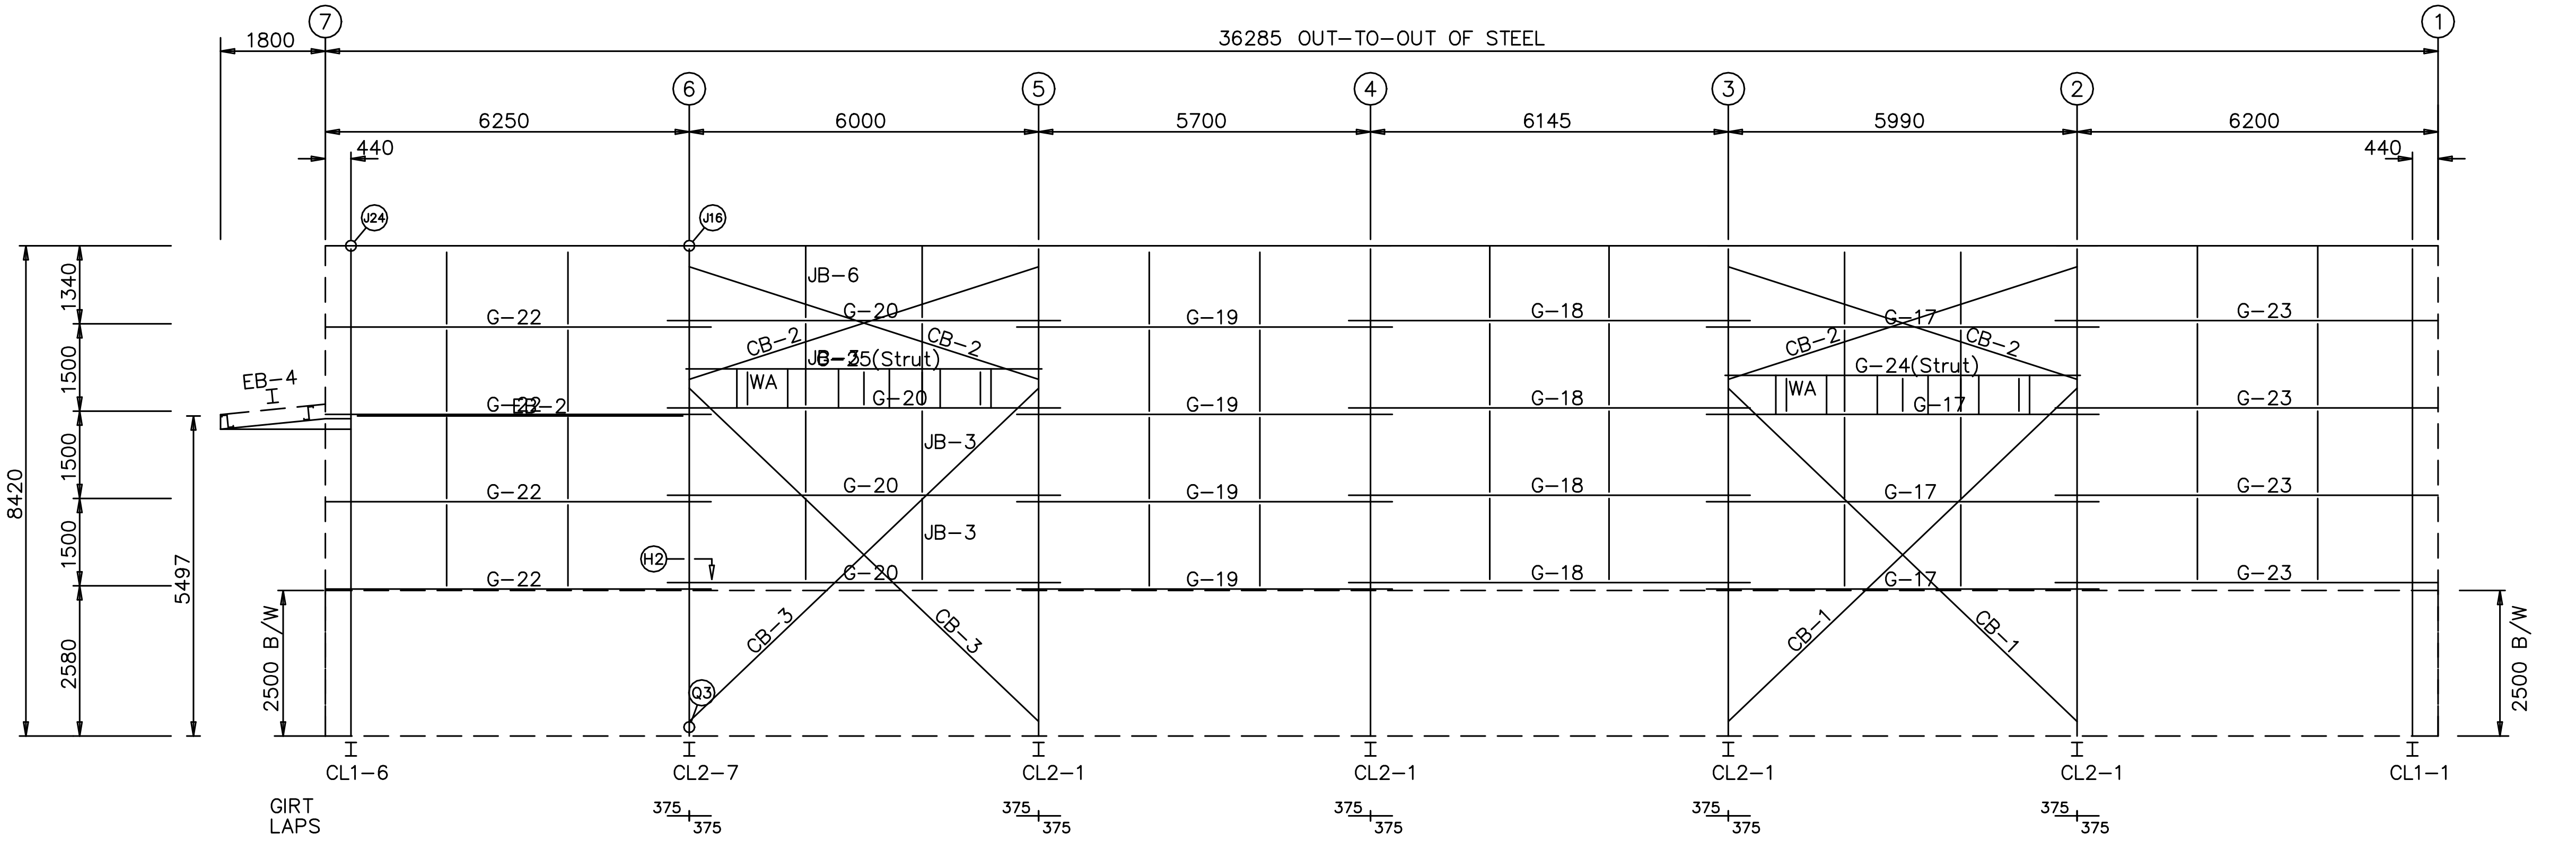

SIDEWALL FRAMING: FRAME LINE C

RECLA INTERNATIONAL PRIVATE LIMITED				
PROJECT	Warehouse	SIDEWALL FRAMING		
ID	C323-153	DESIGN: AAB	DRAFT: SSP	CHECK: VVJ
PROJECT ADDRESS	Warehouse PUNE	DATE: 7/AUG/2025		
		C323-153-A012		