




SHED

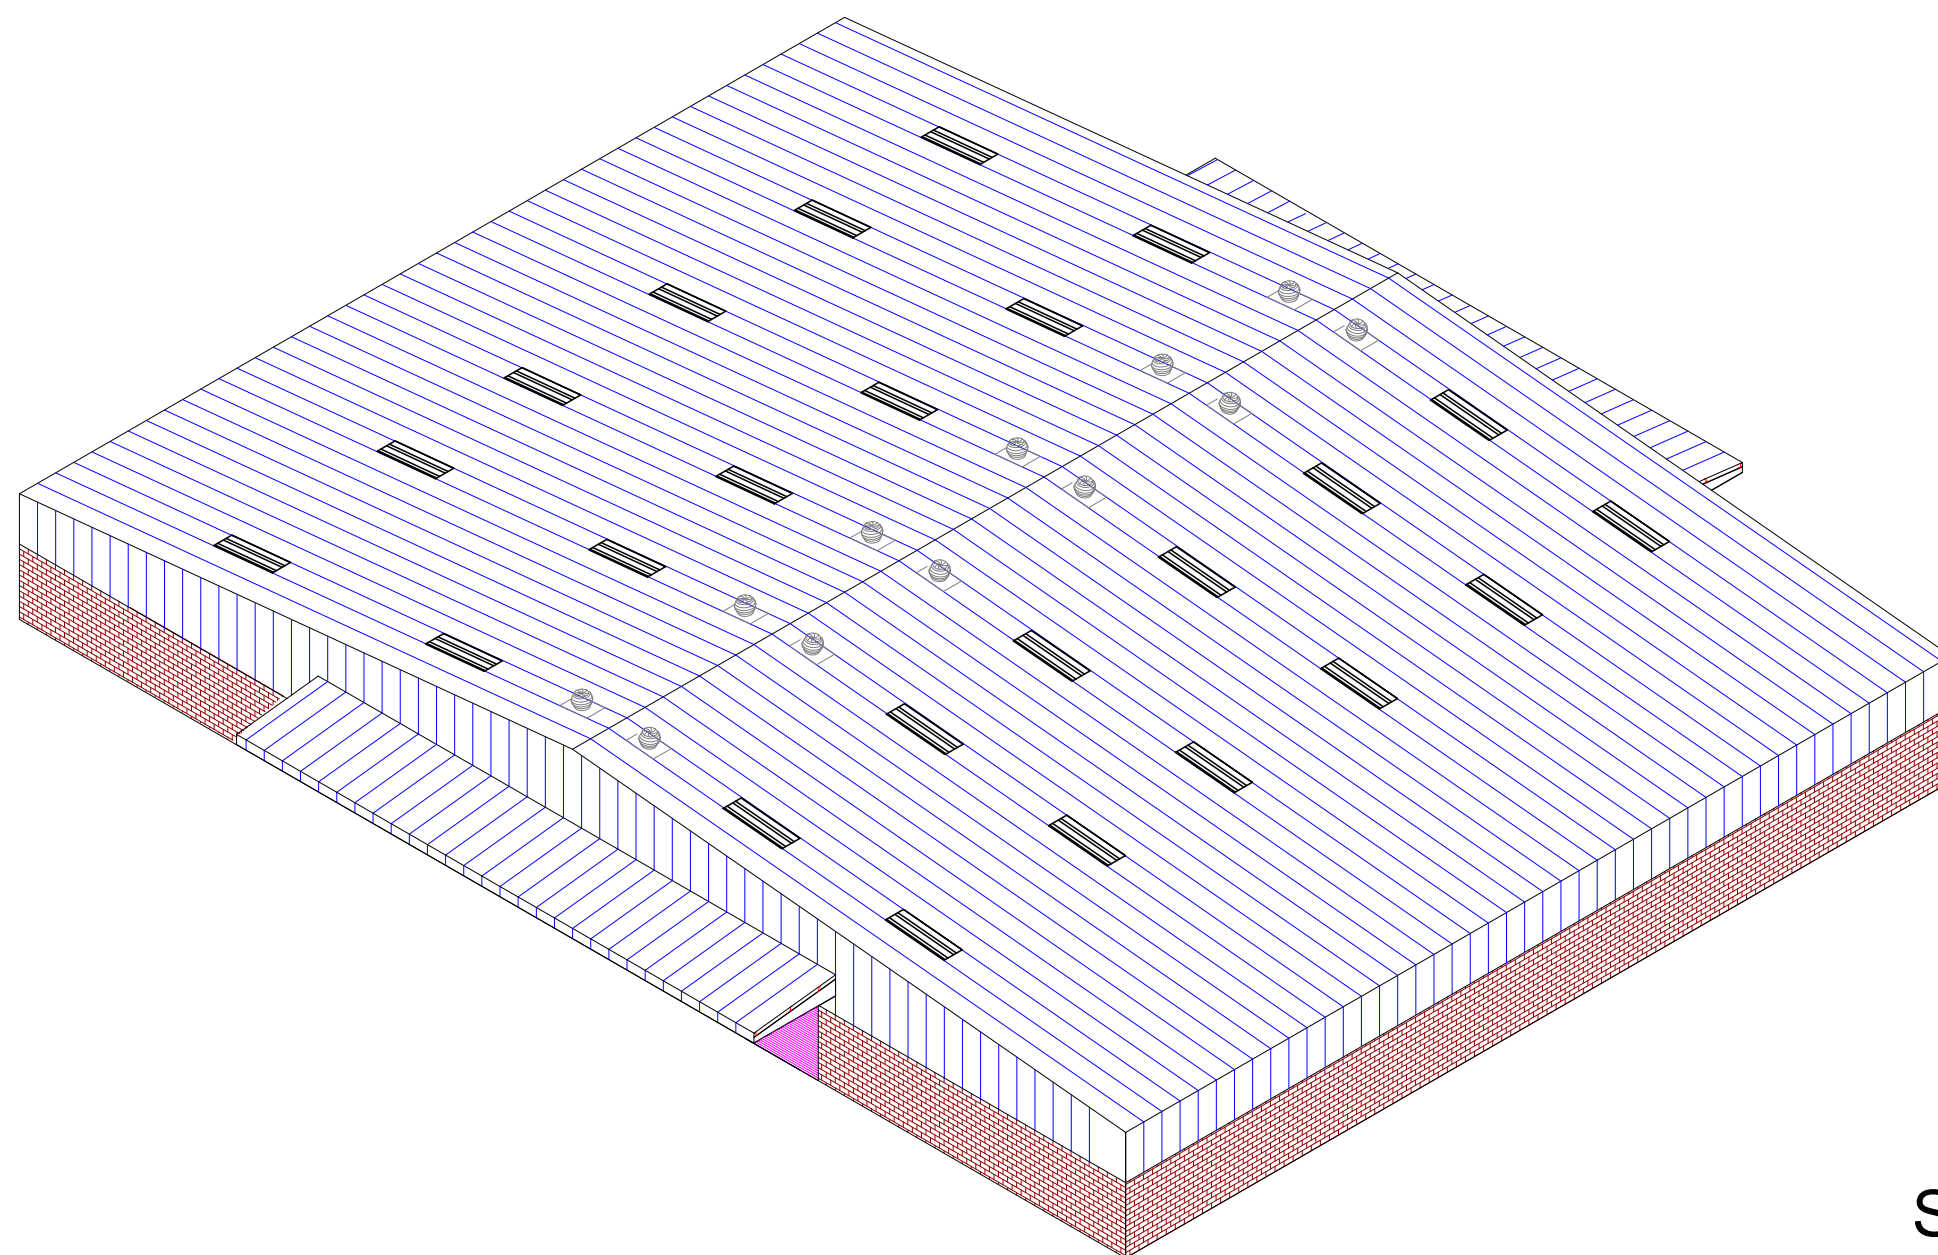

04, Anurekha Soc., Bh. Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

MANUFACTURER OF METAL BUILDINGS


INDEX

SHEET	DESCRIPTION
01-02	PROJECT AND DESIGN DATA
03	COLUMN LAYOUT PLAN
04	FRAME CROSS SECTION
05	ROOF PLAN
06	ENDWALL ELEVATION
07	SIDEWALL ELEVATION

00	01	21.JULY.2018
REV. NO.	BLDG. NO.	DATE
ARS	KJS	ARS
DESIGNED BY	DRAWN BY	CHECKED BY

OUTLINE SPECIFICATIONS																																										
Date		21-JULY-2018		Client		-			Project Location		Jalgoan																															
Proposal Id		C08-033-20180720		Project		SHED			Building No.		B01	Option	01	Revision	00																											
Sr.No.	Description		PEB SPECIFICATIONS																																							
1.	Building type		Multi-span			Area in m ²			2780																																	
2.	Length in m (o/o of steel line)		45.5			Length wise bay spacing			1@7.35+4@7.7+1@7.35																																	
3.	Width in m (o/o of steel line)		61.0			End wall column spacing			1@7.4+6@7.7+1@7.4																																	
4.	Width modules in m		2@30.5			No. of interior columns per frame			01																																	
5.	Clear Height in m		6.0			Frames symmetrical			Yes																																	
6.	Roof		Slope: 10:100			Cladding: 0.5 mm Aluzinc coated steel panels.			Rainwater drainage: Eave Gutter and down take pipes till FFL.																																	
7.	Future Expansion		NA																																							
8.	Block Wall		All around 3.60 m height block wall; bypass condition, wall width 230mm.																																							
9.	Partition Walls		NA																																							
10.	Column base elevations in m		NA (At FFL)																																							
11.	Wall Cladding		0.5 mm Aluzinc coated steel panels above block wall .																																							
12.	Insulation		NA																																							
13.	Location of doors & bracing		<table><tr><td rowspan="2">Doors</td><td colspan="2">Numbers</td><td colspan="4">Type</td><td colspan="3">Size in m (w x h)</td></tr><tr><td colspan="2">08</td><td colspan="4">Roll up door (RUD)</td><td colspan="3">4.0 x 4.0</td></tr></table>												Doors	Numbers		Type				Size in m (w x h)			08		Roll up door (RUD)				4.0 x 4.0											
																Doors	Numbers		Type				Size in m (w x h)																			
			08		Roll up door (RUD)				4.0 x 4.0																																	
			<table><tr><td>Side Wall Grid lines</td><td>1-2</td><td>2-3</td><td>3-4</td><td>4-5</td><td>5-6</td><td>6-7</td><td rowspan="3">Right End Wall</td></tr><tr><td>Front Side Wall</td><td>X</td><td></td><td></td><td></td><td></td><td>X</td></tr><tr><td>Back Side Wall</td><td>X</td><td></td><td></td><td></td><td></td><td>X</td></tr></table>												Side Wall Grid lines	1-2	2-3	3-4	4-5	5-6	6-7	Right End Wall	Front Side Wall	X					X	Back Side Wall	X					X						
															Side Wall Grid lines	1-2	2-3	3-4	4-5	5-6	6-7		Right End Wall																			
															Front Side Wall	X					X																					
			Back Side Wall	X					X																																	
			<table><tr><td>End Wall Axes</td><td>A-B</td><td>B-C</td><td>C-D</td><td>D-E</td><td>E-F</td><td>F-G</td><td>G-H</td><td>H-J</td><td rowspan="3">Back Side Wall</td></tr><tr><td>Right End Wall</td><td></td><td></td><td>RUD</td><td>RUD</td><td>RUD</td><td>RUD</td><td></td><td></td></tr><tr><td>Left End Wall</td><td></td><td></td><td>RUD</td><td>RUD</td><td>RUD</td><td>RUD</td><td></td><td></td></tr></table>												End Wall Axes	A-B	B-C	C-D	D-E	E-F	F-G	G-H	H-J	Back Side Wall	Right End Wall			RUD	RUD	RUD	RUD			Left End Wall			RUD	RUD	RUD	RUD		
															End Wall Axes	A-B	B-C	C-D	D-E	E-F	F-G	G-H	H-J		Back Side Wall																	
															Right End Wall			RUD	RUD	RUD	RUD																					
Left End Wall			RUD	RUD	RUD	RUD																																				
14.	Extensions		Eave: NA		Gable: NA			Canopy: 4.5m wide canopy extension above DSD/RUD clear height.4.5m				Parapet: NA																														
15.	Accessories		Skylights:		24 nos., FRP 3.25m x 1m each			Wall Lights:		NA		Any other: NA																														
			Turbo Ventilators:		24 nos., 600 mm throat diameter			Ridge Ventilators/Roof monitor		NA																																
16.	Mezzanine		NA																																							
17.	Crane		NA																																							
18.	Jack beam		NA																																							
DESIGN CONSIDERATIONS																																										
19.	For Frames (Standard codes and manuals used in design - 2010 Metal Building Systems Manual, NAUS07, AISC05, UBC 1997)		DESIGN LOADS			LOCATION - CLIMATIC DATA					SERVICEABILITY CRITERIA																															
			Dead Load in kN/m ²		0.10	Max wind speed in m/s			39		Frames		H/100, L/180																													
			Live Load in kN/m ²		0.57	Max rainfall intensity in mm/hr			150		Crane Beams		NA																													
			Collateral load in kN/m ²		0.05	Seismic Design category (Coefficient)			II (0.10)		Mezzanine Beams		NA																													
						Max Temperature variation in °C			20		Purlins		Span/150																													
											Girts		Span/120																													

20.	Assumptions & Remarks	Built-up sections are made from hot rolled plates conforming to ASTM A-572 Gr50 (345MPa) steel. The plates are joined together with double side welding. Sections consist of minimum 6 mm for flange & minimum 4mm for web thickness. Cold formed sections thickness 1.5 mm or more are made of hot rolled sheet of Gr50 (345 MPa) steel. Primary structural connections are high strength machine bolts conforming to ASTM A325 or equivalent. Not considered in scope: Foundation, Block wall (Civil work).
21.	Important notes	1. For wind calculation Exposure B is considered as per MBMA-2010. 2. Building is designed for Enclosed condition. 3. All main frame columns are considered as pinned base, end wall columns are pinned base. 4. Rod Bracing at Roof & walls considered

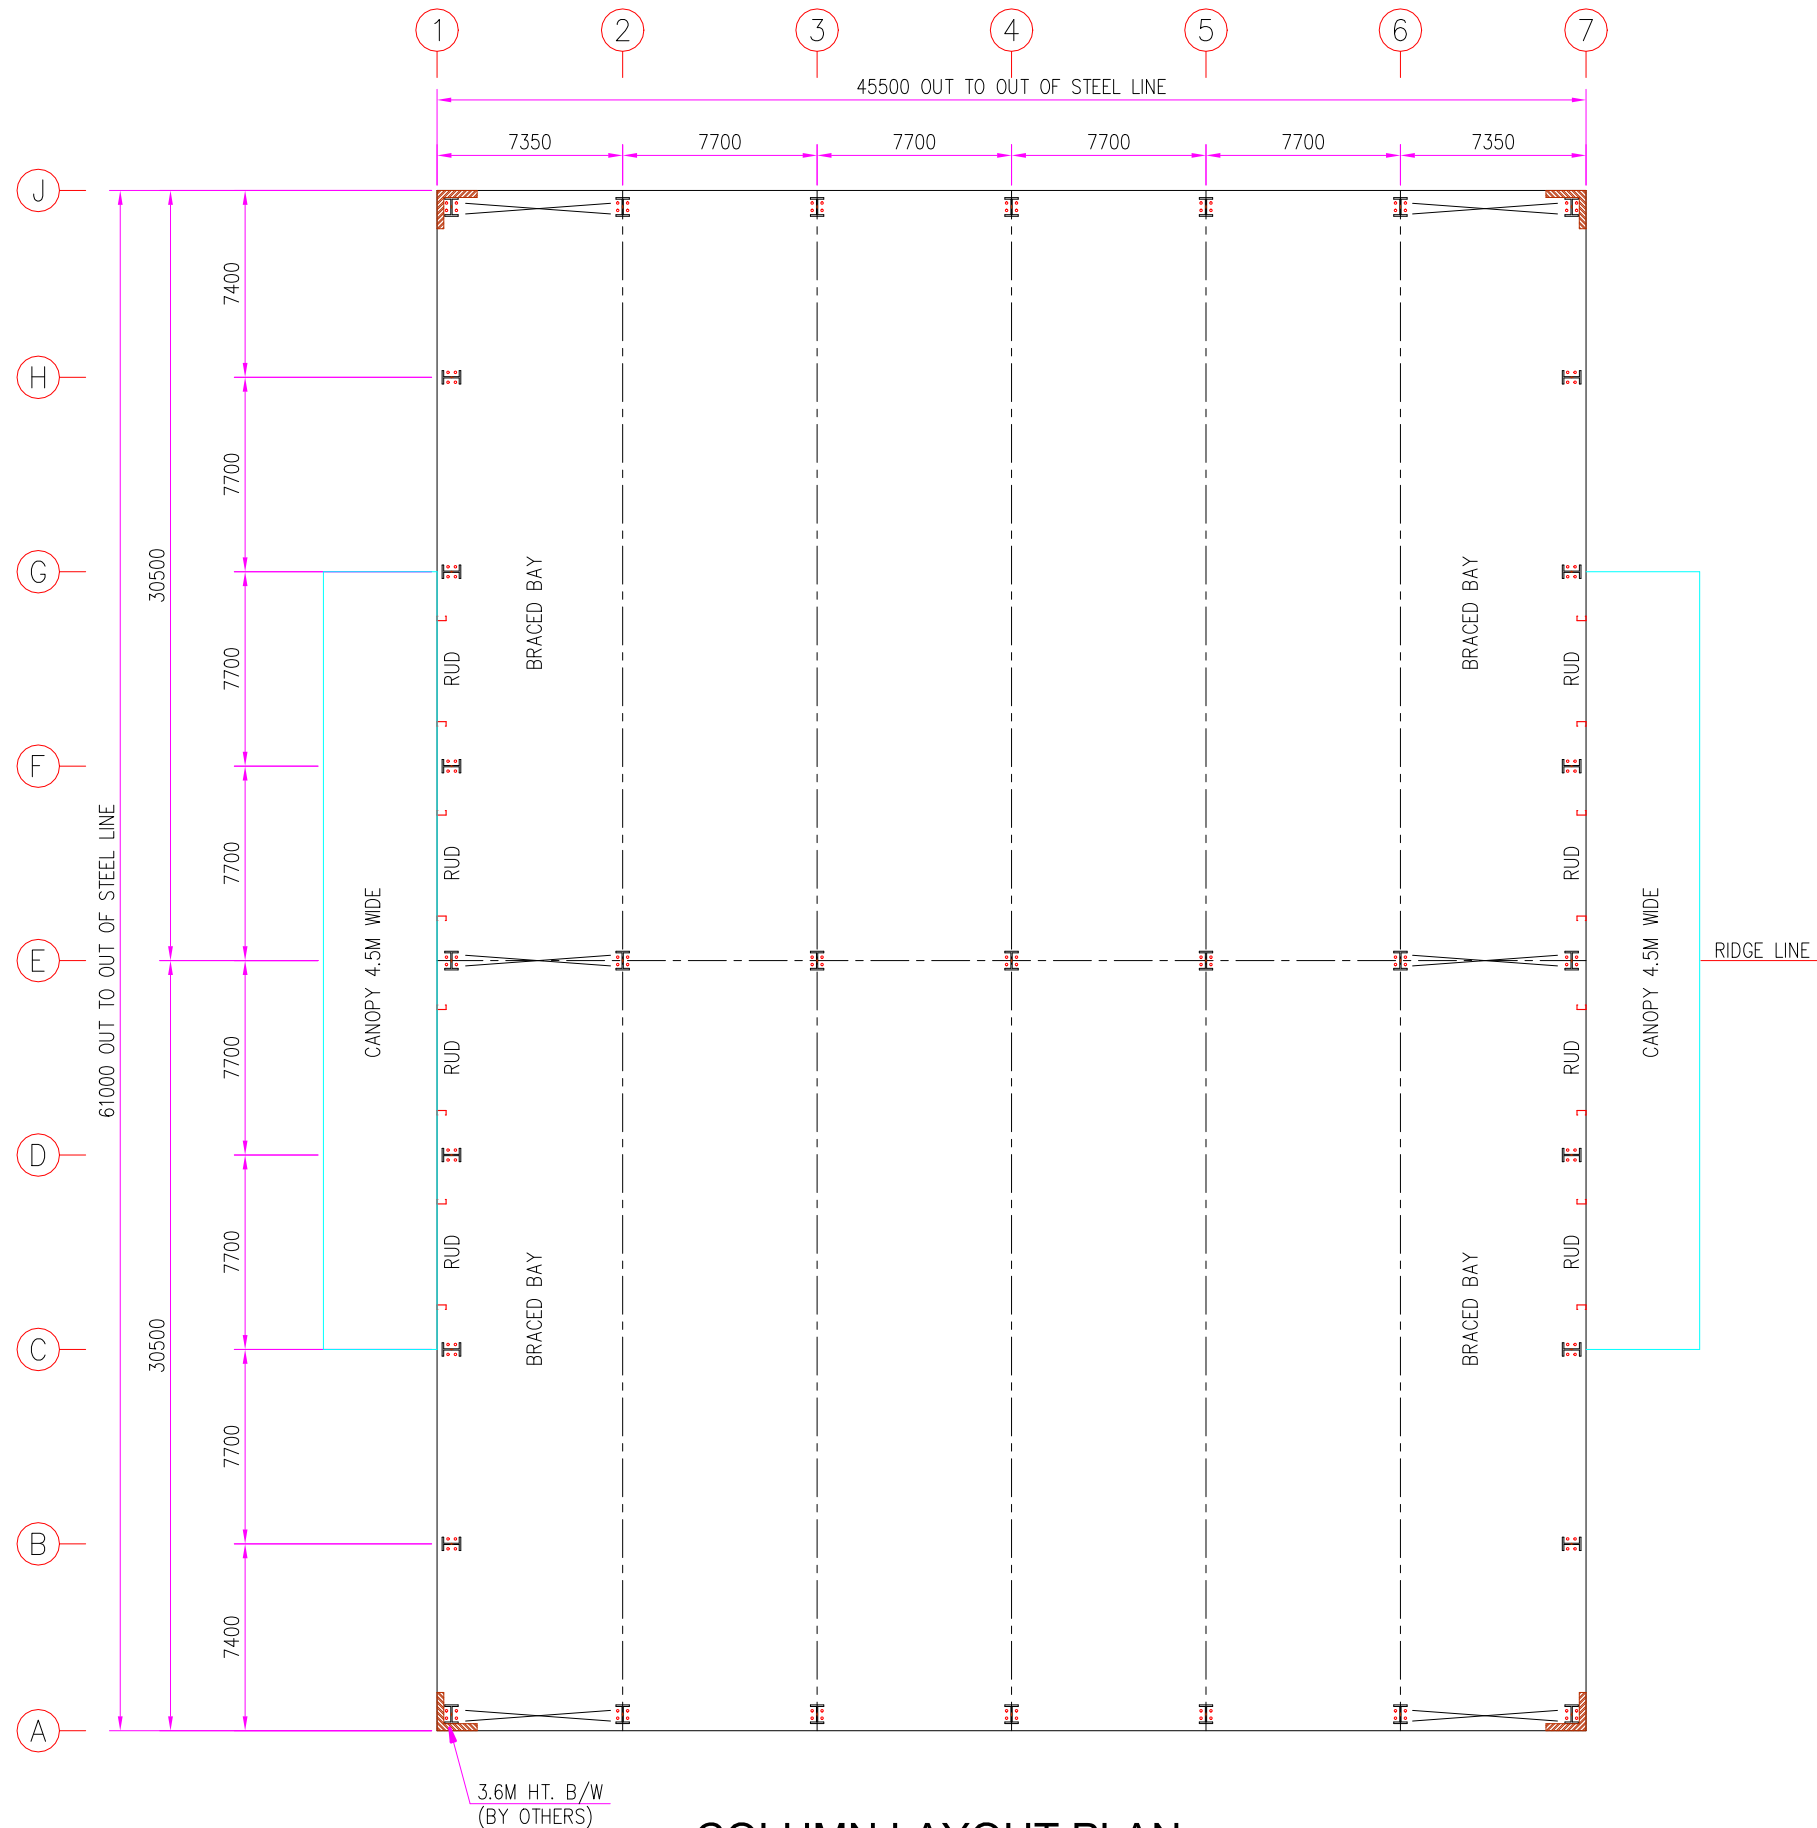

COLUMN LAYOUT PLAN

NOTE:
1. ALL DIMENSION ARE IN MILLIMETER U.N.O
2. ROOF&WALL SHEETING:0.5mm THK. RAL-9016
FINISH: ALUZINC
ALL DIMENSION LEVEL SHOW IN THE PROPOSAL
DRAWING IS INDICATED ONLY, FINAL DESIGN
DIMENSION LEVEL WILL BE SHOWN IN OUR
APPROVAL DRAWING IN THE DESIGN STAGE

00	21JULY2018	ISSUED FOR PROPOSAL	ARS	KJS	ARS
NO.	DATE	DESCRIPTION	DSN	DRN	CHK

PROJECT: SHED


CLIENT: -

STEEL CONTRACTOR:



4, Anurekha Soc.,Bh.
Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

QUOTATION NO.	BUILDING NO.	REVISION NO.	DATE
C08-033-20180720	01	00	21JULY2018
DRAWING TITLE:			DRAWING NO.
COLUMN LAYOUT PLAN			03

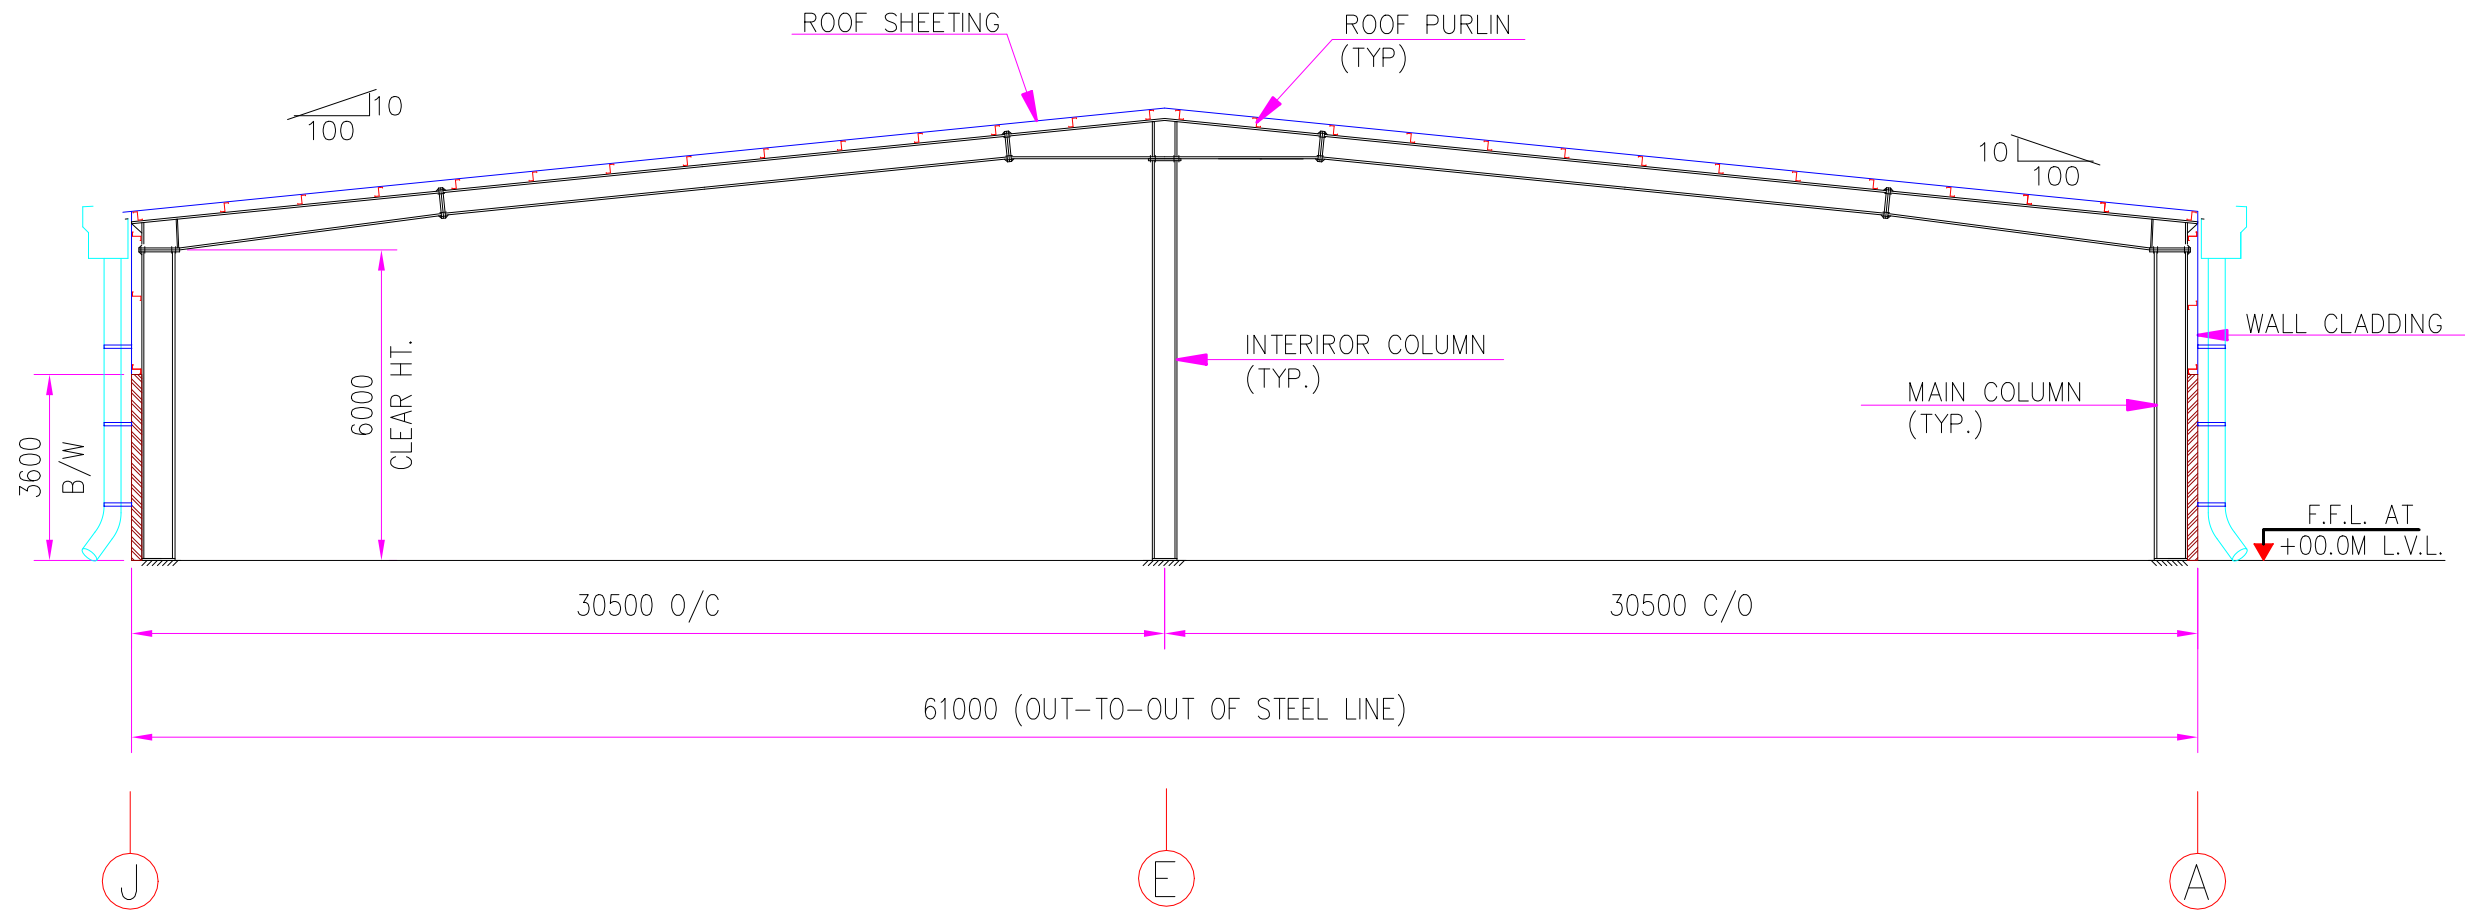

TYPICAL FRAME ELEVATION

NOTE:

1. ALL DIMENSION ARE IN MILLIMETER U.N.O
 2. ROOF&WALL SHEETING:0.5mm THK. RAL-9016
FINISH: ALUZINC
- ALL DIMENSION LEVEL SHOW IN THE PROPOSAL
DRAWING IS INDICATED ONLY, FINAL DESIGN
DIMENSION LEVEL WILL BE SHOWN IN OUR
APPROVAL DRAWING IN THE DESIGN STAGE

00	21JULY2018	ISSUED FOR PROPOSAL	ARS	KJS	ARS
NO.	DATE	DESCRIPTION	DSN	DRN	CHK

PROJECT: SHED


CLIENT: -

STEEL CONTRACTOR:



4, Anurekha Soc.,Bh.
Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

QUOTATION NO.	BUILDING NO.	REVISION NO.	DATE
C08-033-20180720	01	00	21JULY2018
DRAWING TITLE:			DRAWING NO.
FRAME ELEVATION			04

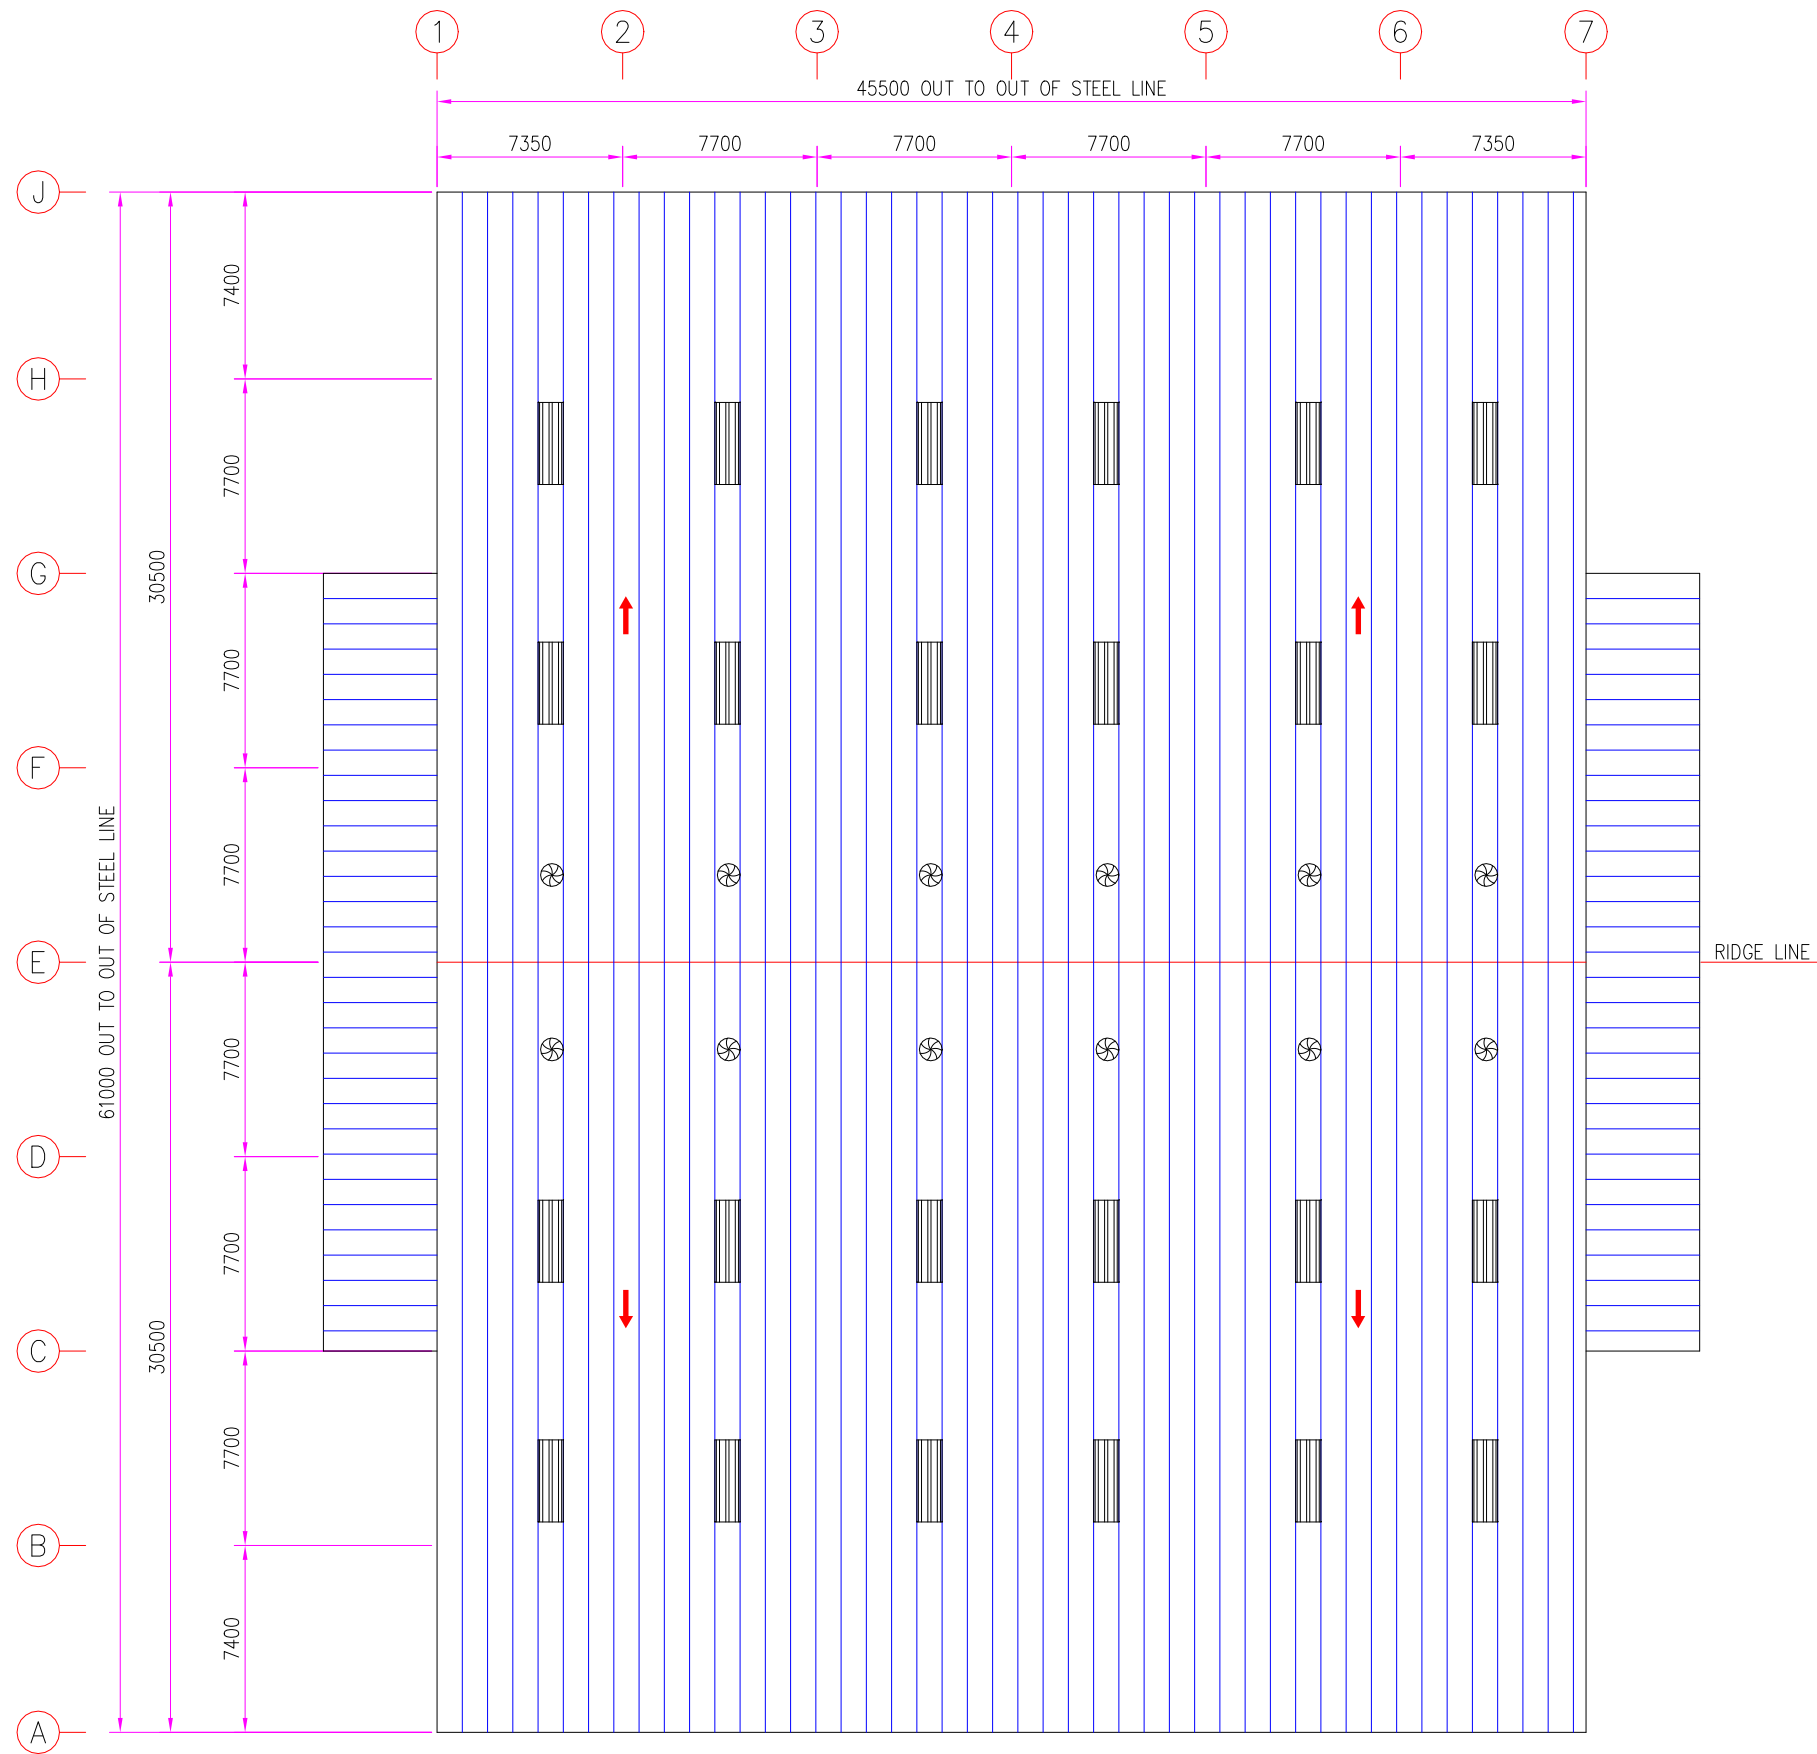

ROOF PLAN

 DENOTE : SKY LIGHT 3250 X 1000mm = 24 Qty.

 DENOTE : TURBO VENTILATOR = 24 Qty.

 DENOTE : SLOPE DIRECTION

NOTE:

1. ALL DIMENSION ARE IN MILLIMETER U.N.O
 2. ROOF&WALL SHEETING:0.5mm THK. RAL-9016
FINISH: ALUZINC
- ALL DIMENSION LEVEL SHOW IN THE PROPOSAL
DRAWING IS INDICATED ONLY, FINAL DESIGN
DIMENSION LEVEL WILL BE SHOWN IN OUR
APPROVAL DRAWING IN THE DESIGN STAGE

00	21JULY2018	ISSUED FOR PROPOSAL	ARS	KJS	ARS
NO.	DATE	DESCRIPTION	DSN	DRN	CHK

PROJECT: SHED


CLIENT: -

STEEL CONTRACTOR:



4, Anurekha Soc.,Bh.
Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

QUOTATION NO.	BUILDING NO.	REVISION NO.	DATE
C08-033-20180720	01	00	21JULY2018
DRAWING TITLE:			DRAWING NO.
ROOF PLAN			05

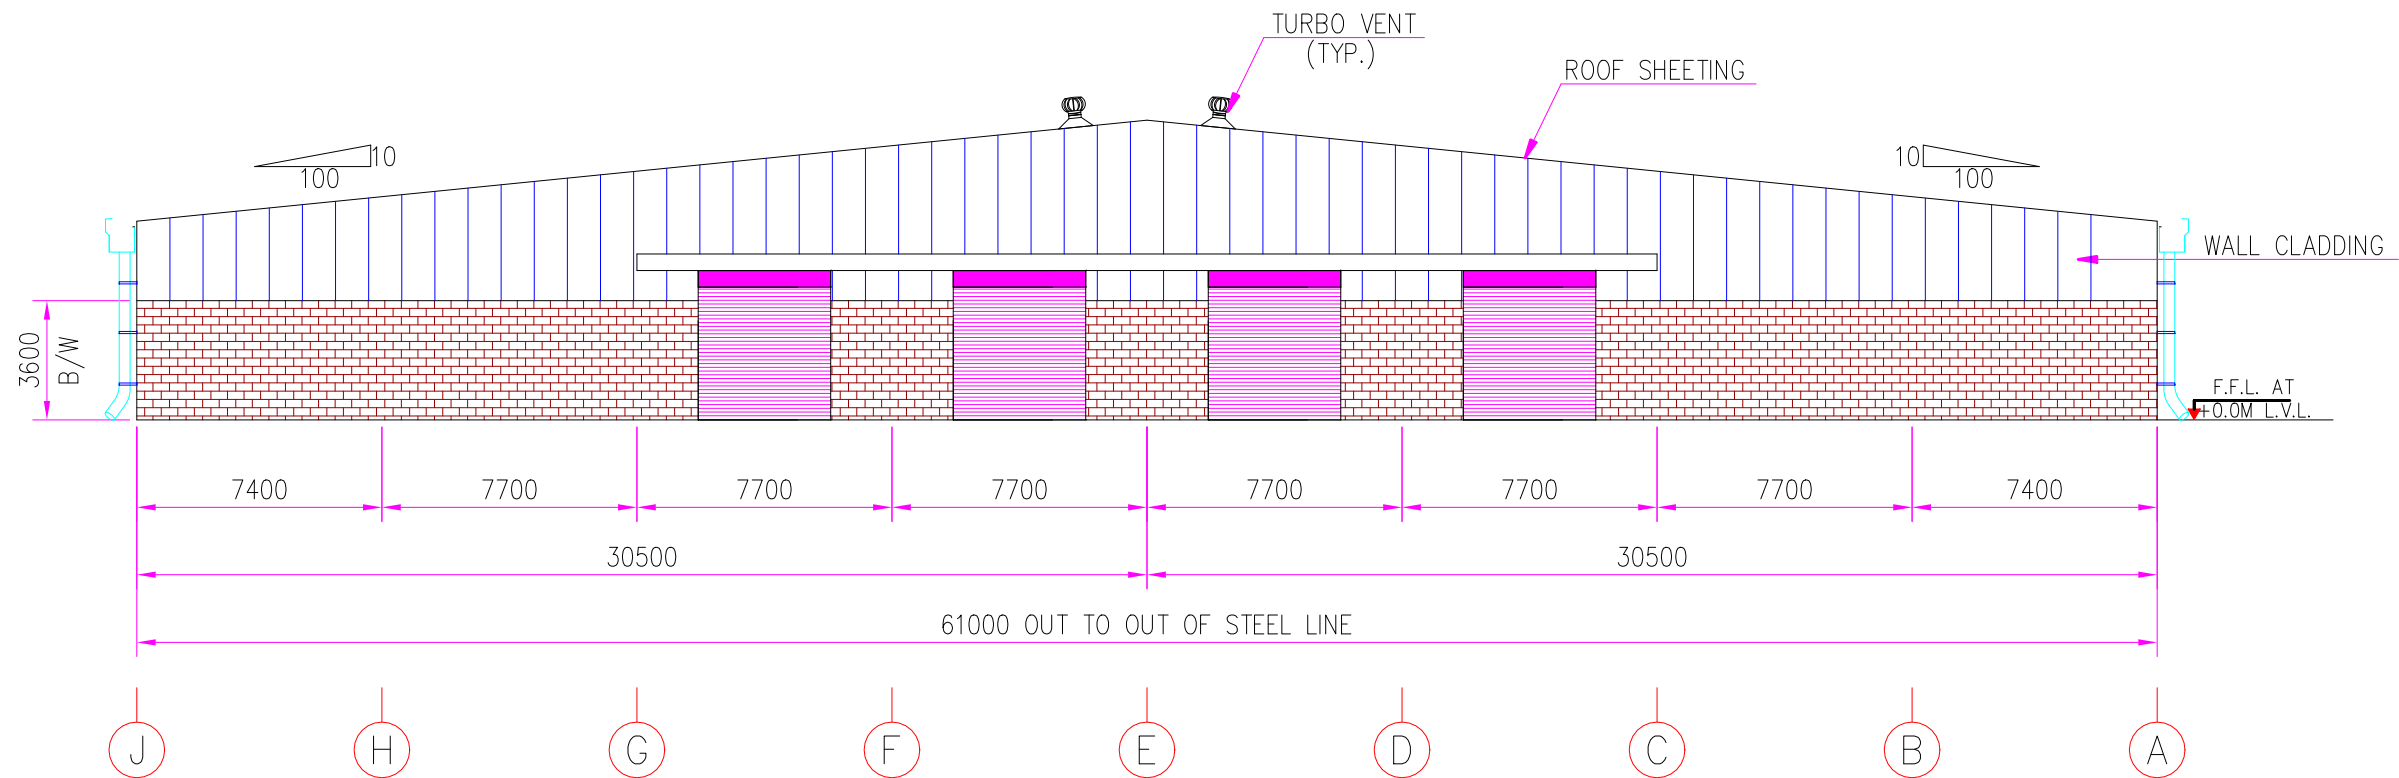

ENDWALL ELEVATION AT G.L - 1 (AS SHOWN)

ENDWALL ELEVATION AT G.L - 7 (OPP. HAND)

NOTE:

1. ALL DIMENSION ARE IN MILLIMETER U.N.O
 2. ROOF&WALL SHEETING:0.5mm THK. RAL-9016
FINISH: ALUZINC
- ALL DIMENSION LEVEL SHOW IN THE PROPOSAL
DRAWING IS INDICATED ONLY, FINAL DESIGN
DIMENSION LEVEL WILL BE SHOWN IN OUR
APPROVAL DRAWING IN THE DESIGN STAGE

00	21JULY2018	ISSUED FOR PROPOSAL	ARS	KJS	ARS
NO.	DATE	DESCRIPTION	DSN	DRN	CHK

PROJECT: SHED


CLIENT: -

STEEL CONTRACTOR:



4, Anurekha Soc.,Bh.
Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

QUOTATION NO.	BUILDING NO.	REVISION NO.	DATE
C08-033-20180720	01	00	21JULY2018
DRAWING TITLE:	ENDWALL ELEVATION		DRAWING NO.
			06

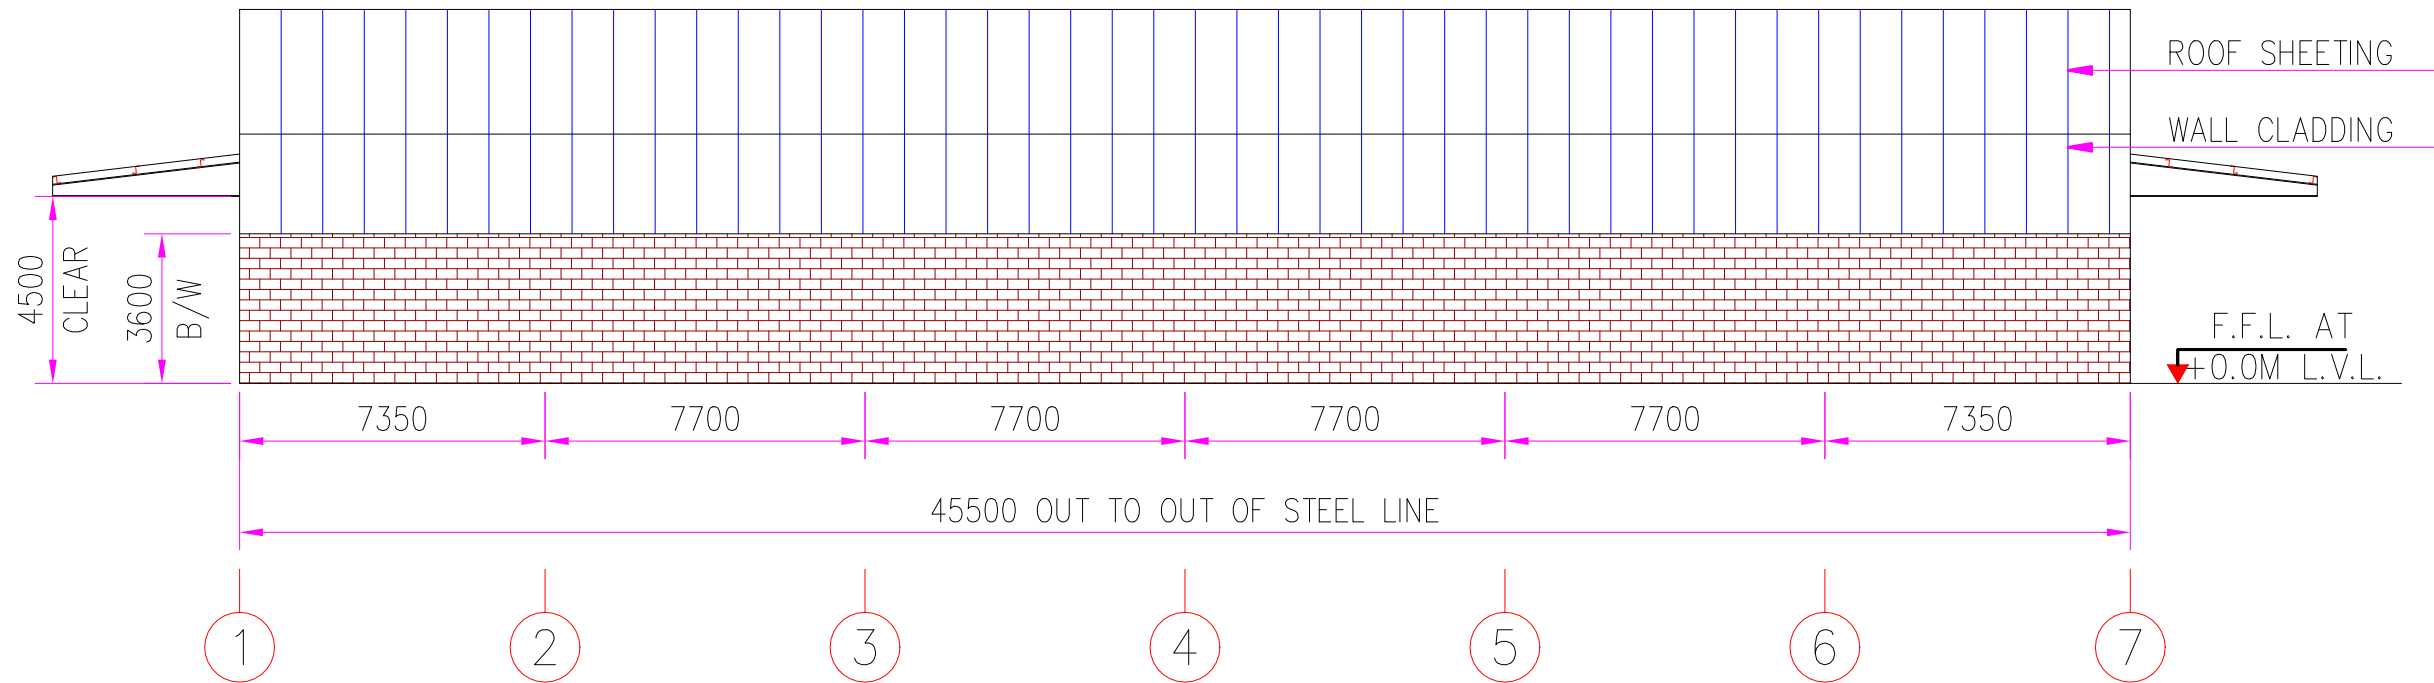

SIDEWALL ELEVATION AT G.L - A (AS SHOWN)
SIDEWALL ELEVATION AT G.L - J (OPP. HAND)

NOTE:

1. ALL DIMENSION ARE IN MILLIMETER U.N.O
 2. ROOF&WALL SHEETING:0.5mm THK. RAL-9016
FINISH: ALUZINC
- ALL DIMENSION LEVEL SHOW IN THE PROPOSAL
DRAWING IS INDICATED ONLY, FINAL DESIGN
DIMENSION LEVEL WILL BE SHOWN IN OUR
APPROVAL DRAWING IN THE DESIGN STAGE

00	21JULY2018	ISSUED FOR PROPOSAL	ARS	KJS	ARS
NO.	DATE	DESCRIPTION	DSN	DRN	CHK

PROJECT: SHED

CLIENT: -

STEEL CONTRACTOR:



4, Anurekha Soc.,Bh.
Tathawade Udyan
Karvenagar, Pune - 411052
Ph. No. 020-64506747

QUOTATION NO.	BUILDING NO.	REVISION NO.	DATE
C08-033-20180720	01	00	21JULY2018
DRAWING TITLE:			DRAWING NO.
SIDEWALL ELEVATION			07